



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id  
**VOLVO A30G 752396**  
Component  
**Front Axle**  
Fluid  
**GEAR OIL SAE 75W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0004846	---	---
Sample Date		Client Info		12 Apr 2024	---	---
Machine Age	hrs	Client Info		1988	---	---
Oil Age	hrs	Client Info		2000	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	281	---	---
Chromium	ppm	ASTM D5185m	>20	4	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	<1	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>150	16	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	4	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	400	219	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	10	---	---
Manganese	ppm	ASTM D5185m		9	---	---
Magnesium	ppm	ASTM D5185m	12	0	---	---
Calcium	ppm	ASTM D5185m	150	983	---	---
Phosphorus	ppm	ASTM D5185m	1650	1382	---	---
Zinc	ppm	ASTM D5185m	125	413	---	---
Sulfur	ppm	ASTM D5185m	22500	22736	---	---
Visc @ 40°C	cSt	ASTM D445	109	82.5	---	---

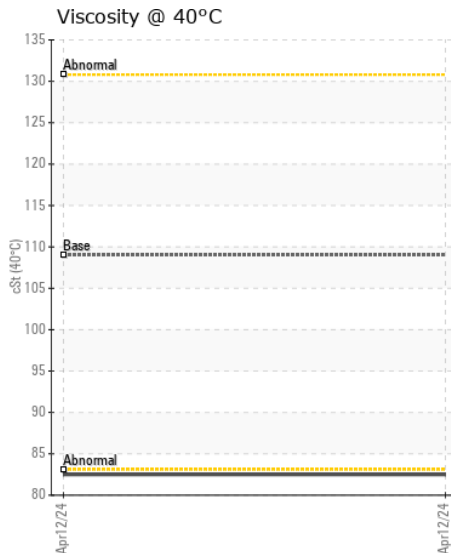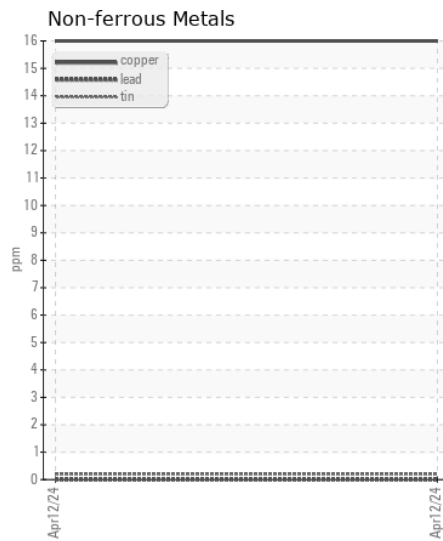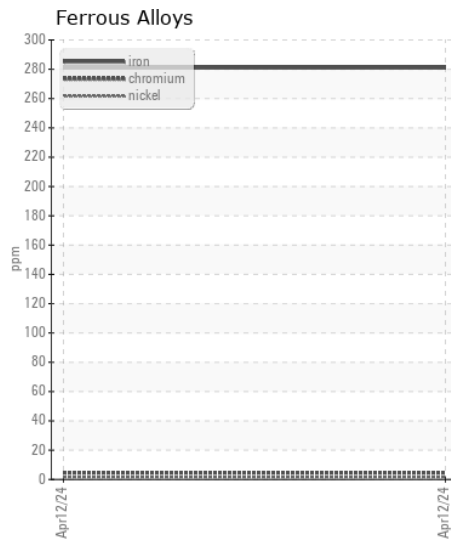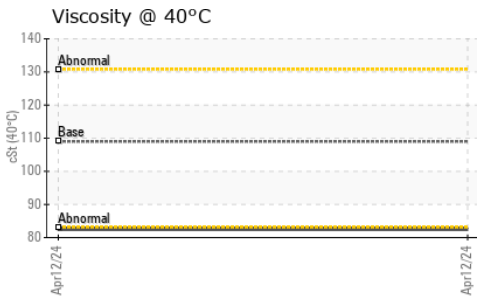

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0004846  
**Lab Number** : 06154981  
**Unique Number** : 10990404  
**Test Package** : CONST

**Received** : 19 Apr 2024  
**Tested** : 22 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Jonathan Hester

**365 - ASCENDUM MACHINERY INC - SAVANNAH**  
 54 MEDLINE DR  
 RICHMOND HILL, GA  
 US 31324  
 Contact: JESSE WILSON  
 jesse.wilson@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: (912)964-9515