



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(RE8717) {UNASSIGNED}
Machine Id
213015
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (20 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0109663	GFL0092658	GFL0072342
Sample Date		Client Info		21 Apr 2024	01 Nov 2023	23 May 2023
Machine Age	hrs	Client Info		0	1871	0
Oil Age	hrs	Client Info		0	653	625
Filter Age	hrs	Client Info		0	653	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	42	74	74
Chromium	ppm	ASTM D5185m	>20	2	3	3
Nickel	ppm	ASTM D5185m	>2	0	<1	<1
Titanium	ppm	ASTM D5185m	>2	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	17	16	11
Lead	ppm	ASTM D5185m	>40	0	0	2
Copper	ppm	ASTM D5185m	>330	4	10	46
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	12	▲ 25
Potassium	ppm	ASTM D5185m	>20	52	53	23
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>6	0.8	1	0.7
Nitration	Abs/cm	*ASTM D7624	>20	9.5	10.7	11.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.9	23.1	25.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	10	2	6
Boron	ppm	ASTM D5185m	250	9	7	35
Barium	ppm	ASTM D5185m	10	2	<1	4
Molybdenum	ppm	ASTM D5185m	100	61	59	42
Manganese	ppm	ASTM D5185m		2	2	6
Magnesium	ppm	ASTM D5185m	450	893	905	547
Calcium	ppm	ASTM D5185m	3000	1109	1241	1631
Phosphorus	ppm	ASTM D5185m	1150	1006	952	719
Zinc	ppm	ASTM D5185m	1350	1190	1266	907
Sulfur	ppm	ASTM D5185m	4250	3171	2754	2575
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.5	20.8	27.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.9	6.1	7.4
Visc @ 100°C	cSt	ASTM D445	14.4	12.7	12.9	13.5

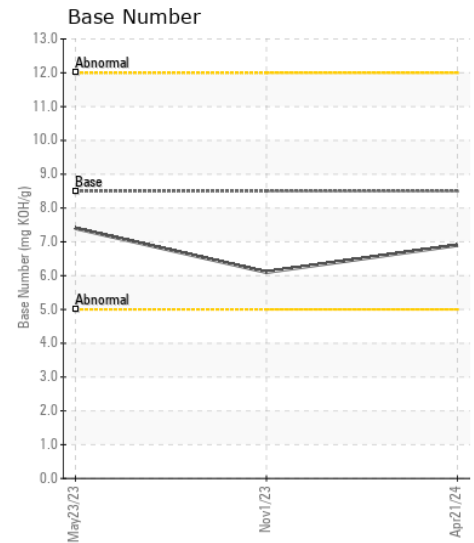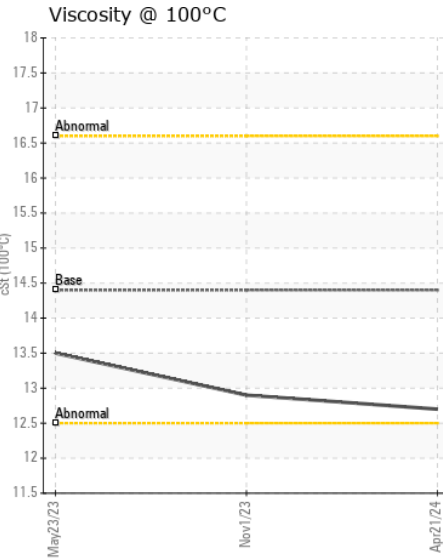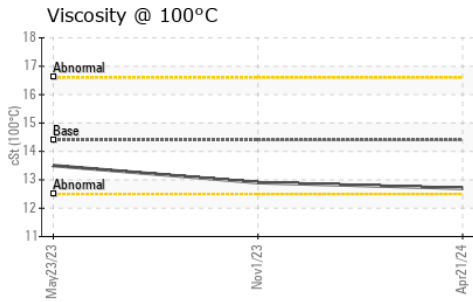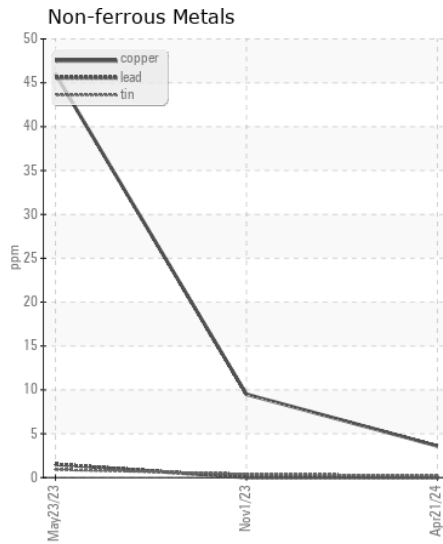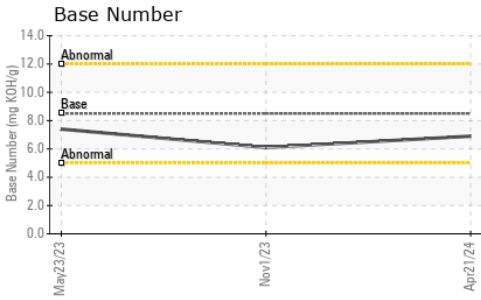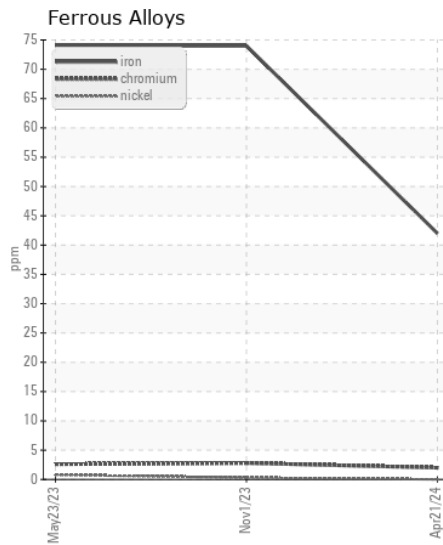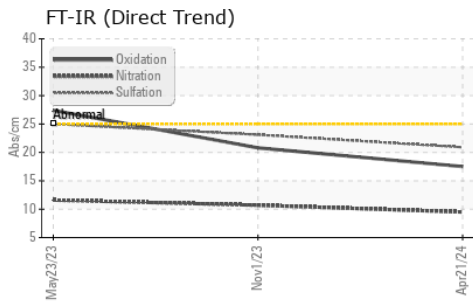

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109663
Lab Number : 06155626
Unique Number : 10991049
Test Package : FLEET

Received : 22 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 23 Apr 2024 - Wes Davis

GFL Environmental - 005 - Wilson/Tri-East(CNG)
 2810 Contentnea Road S
 Wilson, NC
 US 27893-8501
 Contact: SPENCER LIGGON
 spencer.liggon@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)