

WEAR NORMAL CONTAMINATION NORMAL FLUID CONDITION NORMAL


Machine Id

24D1604 AN CONC 2022

Component New (Unused) Oil

{not provided} (--- GAL)

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
This is a baseline read-out on the submitted sample.	Sample Number		Client Info		HPL006577		
This is a baseline read-out on the submitted sample.	Sample Date		Client Info		17 Apr 2024		
	Machine Age	hrs	Client Info		0		
	Oil Age	hrs	Client Info		0		
	Filter Age	hrs	Client Info		0		
	Oil Changed		Client Info		N/A		
	Filter Changed		Client Info		N/A		
	Sample Status				NORMAL		
WEAR	Iron	ppm	ASTM D5185m		0		
	Chromium	ppm	ASTM D5185m		0		
	Nickel	ppm	ASTM D5185m		0		
	Titanium	ppm	ASTM D5185m		0		
	Silver	ppm	ASTM D5185m		0		
	Aluminum	ppm	ASTM D5185m		8		
	Lead	ppm	ASTM D5185m		0		
	Copper	ppm	ASTM D5185m		0		
	Tin		ASTM D5185m		0		
	Vanadium	ppm ppm	ASTM D5185m		۰ <1		
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
	Tellow Metal	Scalal	visuai				
CONTAMINATION	Silicon	ppm	ASTM D5185m		<1		
	Potassium	ppm	ASTM D5185m	>20	0		
	Water		WC Method		NEG		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual		NEG		
FLUID CONDITION	Sodium	ppm	ASTM D5185m		<1		
	Boron	ppm	ASTM D5185m		0		
	Barium	ppm	ASTM D5185m		0		
	Molybdenum	ppm	ASTM D5185m		1		
	Manganese	ppm	ASTM D5185m		0		
	Magnesium	ppm	ASTM D5185m		0		
	Calcium	ppm	ASTM D5185m		6		
	Phosphorus	ppm	ASTM D5185m		8		
	Zinc	ppm	ASTM D5185m		0		
	Sulfur	ppm	ASTM D5185m		28338		
	Acid Number (AN)	mg KOH/g	ASTM D3103III ASTM D8045		0.046		
	Visc @ 40°C	cSt	ASTM D0045 ASTM D445		36.46		
	Visc @ 40 C Visc @ 100°C	cSt	ASTM D445 ASTM D445		5.85		
	Viscosity Index (VI)		ASTM D445 ASTM D2270		101		
	viscosity index (VI)	Scale	ASTIVI D2270				

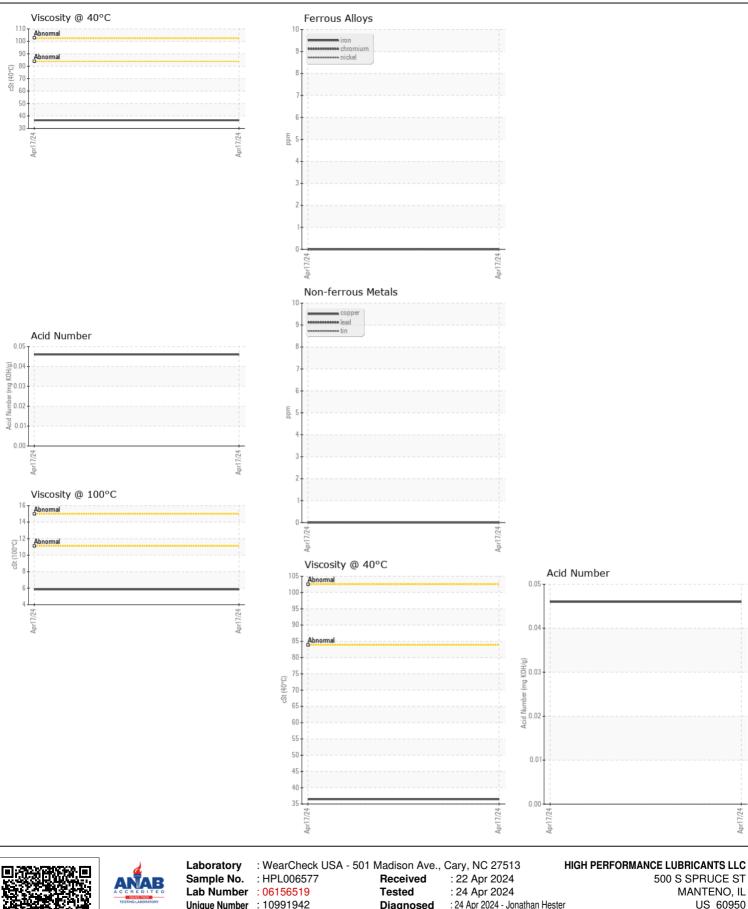

Contact/Location: DAVID WARD - HIGMAN Page 2 of 2

F: x: