



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
BRAD BARNARD [7719460]
 Machine Id
VOLVO PENTA 2004005414
 Component
Starboard Diesel Engine
 Fluid
VOLVO VDS-4.5 Premium Motor Oil 15W40 (3 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA058695	---	---
Sample Date		Client Info		10 Apr 2024	---	---
Machine Age	hrs	Client Info		1070	---	---
Oil Age	hrs	Client Info		1070	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	15	---	---
Chromium	ppm	ASTM D5185m	>6	2	---	---
Nickel	ppm	ASTM D5185m	>2	2	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>20	5	---	---
Lead	ppm	ASTM D5185m	>95	4	---	---
Copper	ppm	ASTM D5185m	>85	14	---	---
Tin	ppm	ASTM D5185m	>9	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		6	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		58	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		950	---	---
Calcium	ppm	ASTM D5185m		1066	---	---
Phosphorus	ppm	ASTM D5185m		1039	---	---
Zinc	ppm	ASTM D5185m		1212	---	---
Sulfur	ppm	ASTM D5185m		3559	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.4	---	---
Visc @ 100°C	cSt	ASTM D445		12.6	---	---

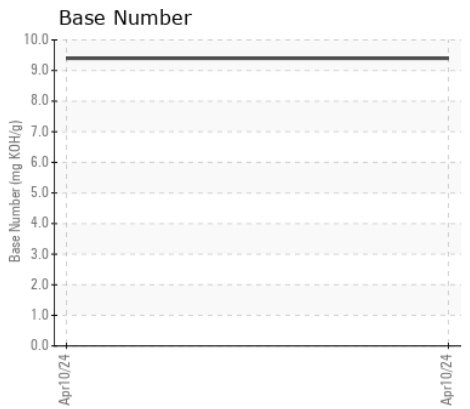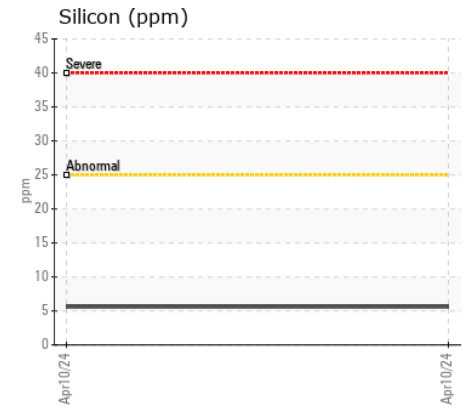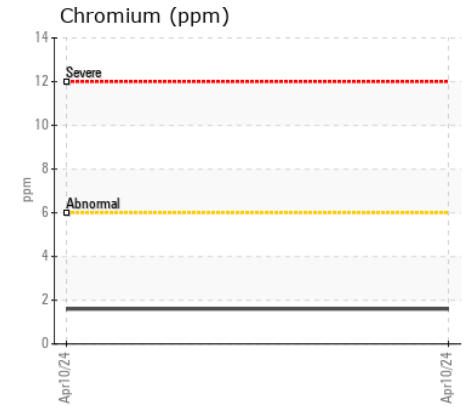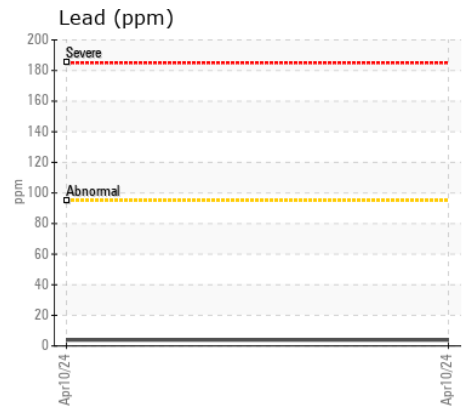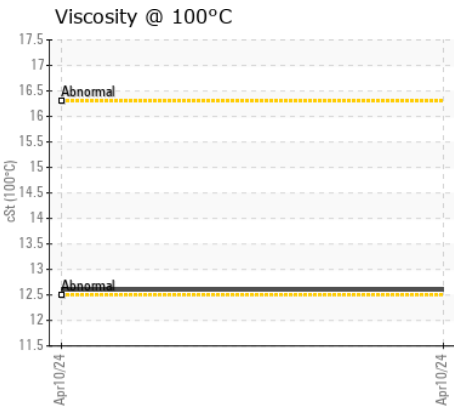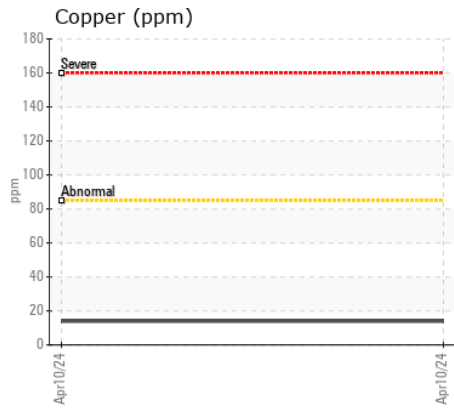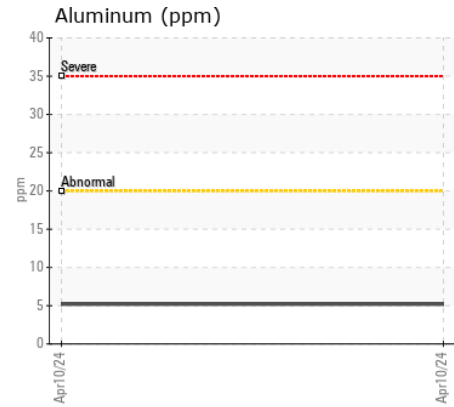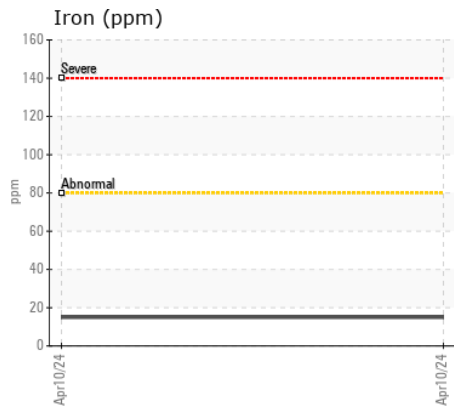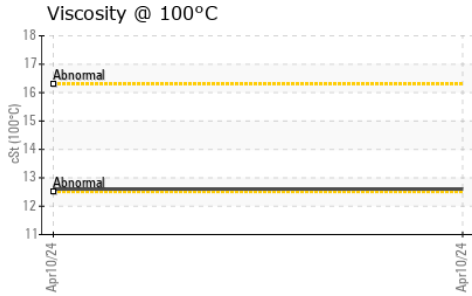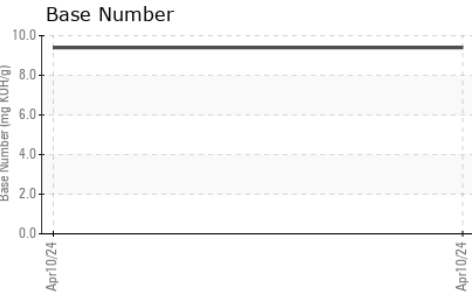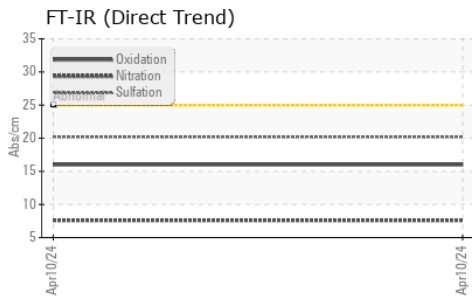

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA058695 **Received** : 23 Apr 2024
Lab Number : 06157336 **Tested** : 24 Apr 2024
Unique Number : 10992759 **Diagnosed** : 25 Apr 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: TBN)

Pacific Power Group - VP981534
 7215 S 228th St
 Kent, WA
 US 98032
 Contact: PAT RYAN
 pryan@pacificpowergroup.com
 T: (253)520-5163
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)