



**James River
Equipment**

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 220DW 1FF220DWHDD041203

Component
Front Differential

Fluid
TDH FLUID SAE 75W80 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0212392	---	---
Sample Date		Client Info		22 Apr 2024	---	---
Machine Age	hrs	Client Info		8874	---	---
Oil Age	hrs	Client Info		8874	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		41	---	---
Iron	ppm	ASTM D5185m	>500	53	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	5	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>100	7	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	10	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		16	---	---
Boron	ppm	ASTM D5185m	10	114	---	---
Barium	ppm	ASTM D5185m	10	1	---	---
Molybdenum	ppm	ASTM D5185m	10	<1	---	---
Manganese	ppm	ASTM D5185m		6	---	---
Magnesium	ppm	ASTM D5185m	100	10	---	---
Calcium	ppm	ASTM D5185m	3500	3408	---	---
Phosphorus	ppm	ASTM D5185m	1150	1082	---	---
Zinc	ppm	ASTM D5185m	1150	1371	---	---
Sulfur	ppm	ASTM D5185m	5000	3579	---	---
Visc @ 40°C	cSt	ASTM D445	48	54.7	---	---

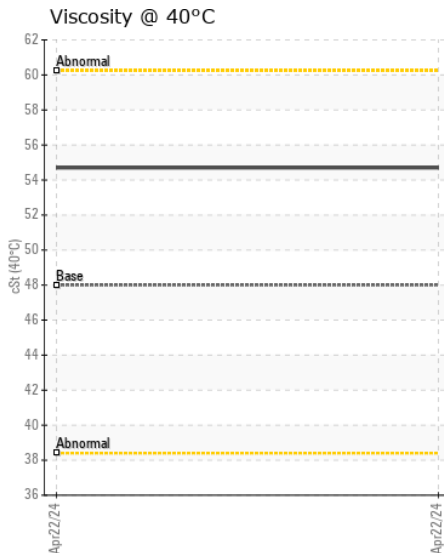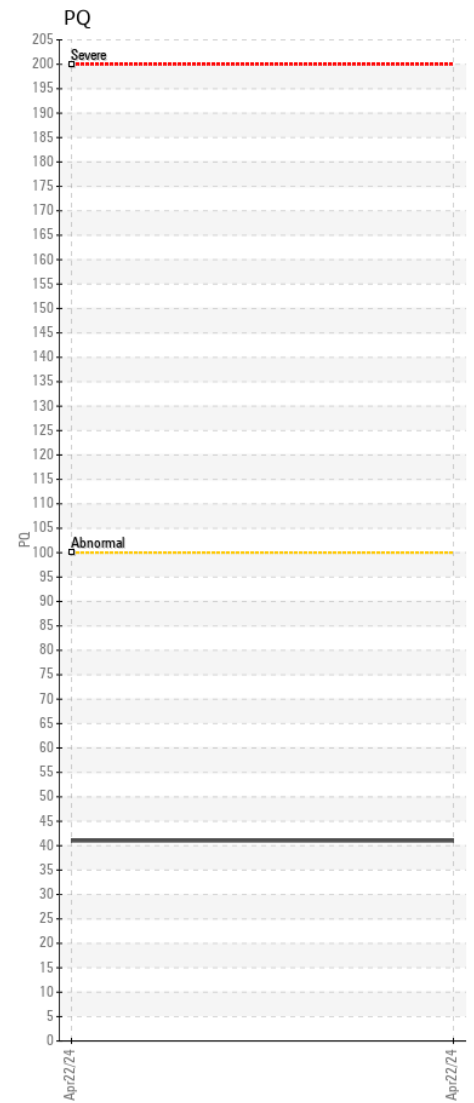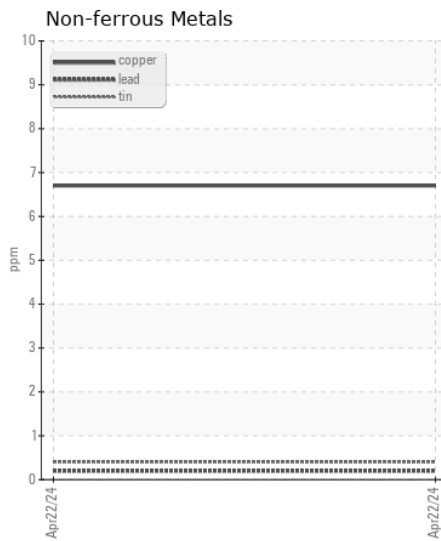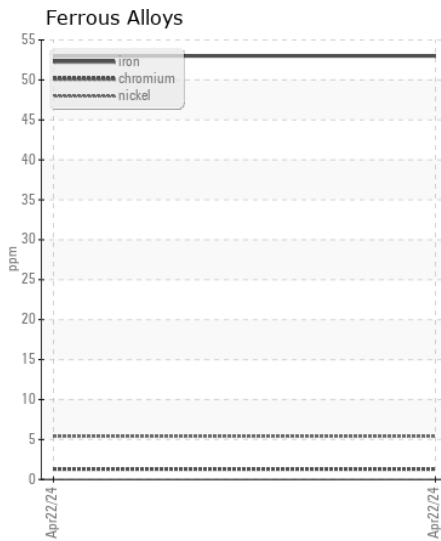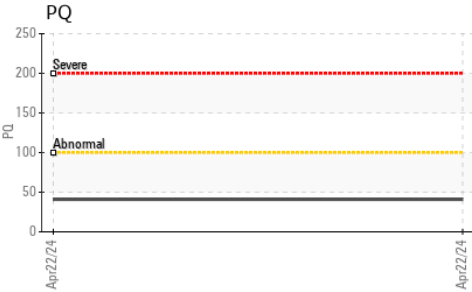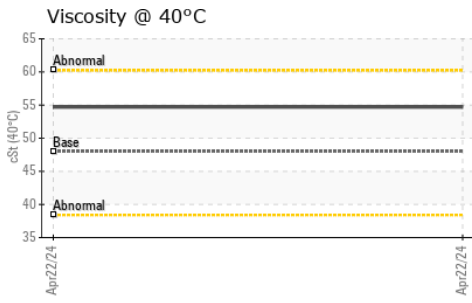

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212392 **Received** : 23 Apr 2024
Lab Number : 06157926 **Tested** : 24 Apr 2024
Unique Number : 10993349 **Diagnosed** : 25 Apr 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: RENN MASHBURN
 renn.mashburn@jamesriverequipment.com
 T:
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)