



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A40G 341237
Component
Transmission (Auto)
Fluid
VOLVO AT 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION





The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0010496	VCP421559	VCP411920
Sample Date		Client Info		18 Apr 2024	31 Oct 2023	27 Jul 2023
Machine Age	hrs	Client Info		8907	7991	7468
Oil Age	hrs	Client Info		1000	0	0
Filter Age	hrs	Client Info		1000	0	0
Oil Changed		Client Info		Not Changed	N/A	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

Iron	ppm	ASTM D5185m	>160	45	29	24
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>5	2	2	2
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	16	17	14
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>225	18	17	13
Tin	ppm	ASTM D5185m	>10	1	2	1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	▲ MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>20	17	9	7
Potassium	ppm	ASTM D5185m	>20	1	3	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		3	6	4
Boron	ppm	ASTM D5185m	187	83	85	110
Barium	ppm	ASTM D5185m	0.0	<1	0	0
Molybdenum	ppm	ASTM D5185m	0.0	0	0	0
Manganese	ppm	ASTM D5185m	0.0	3	0	<1
Magnesium	ppm	ASTM D5185m	6.8	<1	0	0
Calcium	ppm	ASTM D5185m	215	86	66	67
Phosphorus	ppm	ASTM D5185m	445	209	174	191
Zinc	ppm	ASTM D5185m	56	3	4	0
Sulfur	ppm	ASTM D5185m	1336	2273	1817	2288
Visc @ 40°C	cSt	ASTM D445	35.3	27.7	27.7	28.2

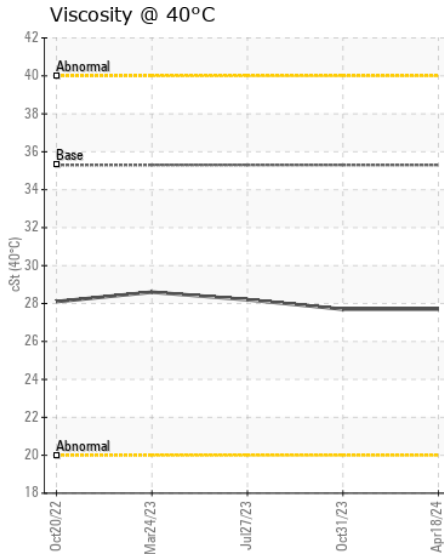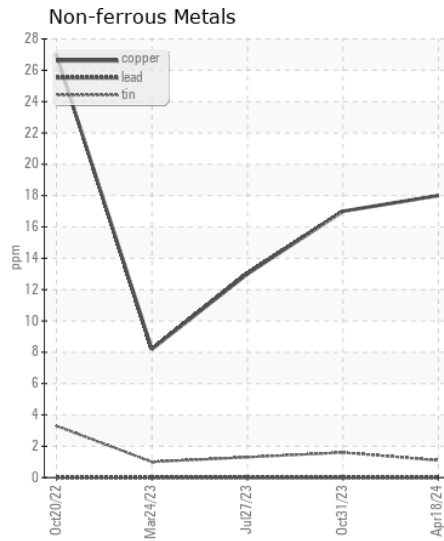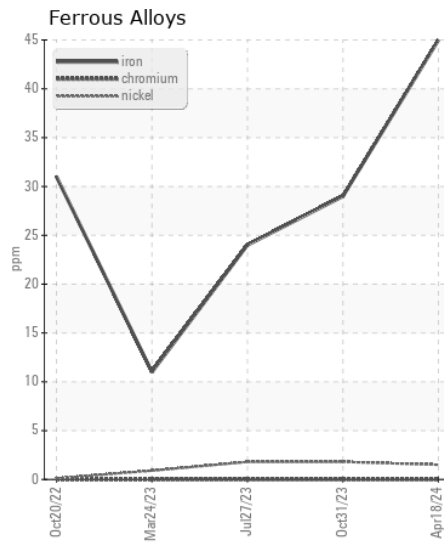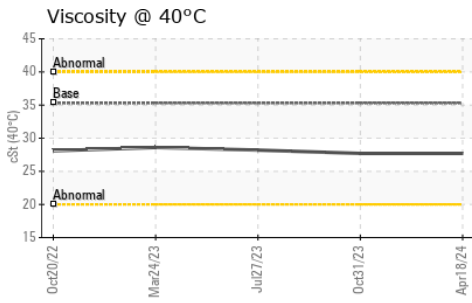

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0010496
Lab Number : 06158162
Unique Number : 10993585
Test Package : CONST
Received : 23 Apr 2024
Tested : 24 Apr 2024
Diagnosed : 25 Apr 2024 - Jonathan Hester

HANSON SOUTHEAST
 NC HWY 117
 ERWIN, NC
 US 28339
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: