



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 8235R 1RW8235RJCP059879**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (44 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0172266</b>	JRMC430946	---
Sample Date		Client Info		<b>15 Apr 2024</b>	04 Apr 2017	---
Machine Age	hrs	Client Info		<b>3098</b>	1361	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	N/A	---
Filter Changed		Client Info		<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>33</b>	47	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	5	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>31	<b>6</b>	13	---
Lead	ppm	ASTM D5185m	>26	<b>0</b>	2	---
Copper	ppm	ASTM D5185m	>26	<b>2</b>	18	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>9</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	26	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.21	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.8</b>	4.	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.9</b>	15.	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>&lt;1</b>	2	---
Boron	ppm	ASTM D5185m		<b>230</b>	148	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>263</b>	254	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>871</b>	830	---
Calcium	ppm	ASTM D5185m		<b>1516</b>	1330	---
Phosphorus	ppm	ASTM D5185m		<b>894</b>	850	---
Zinc	ppm	ASTM D5185m		<b>1105</b>	992	---
Sulfur	ppm	ASTM D5185m		<b>3238</b>	2569	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.0</b>	8.	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>9.4</b>	12.88	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	14.29	---

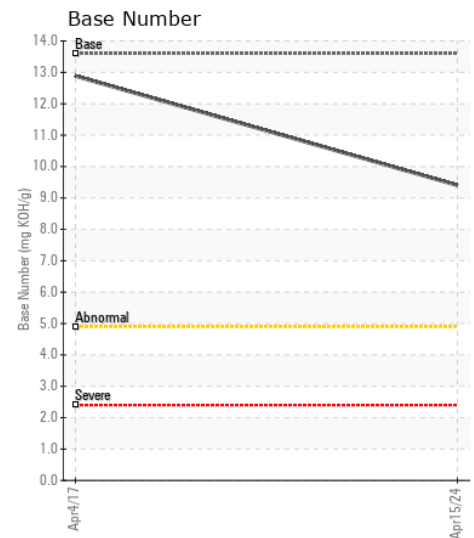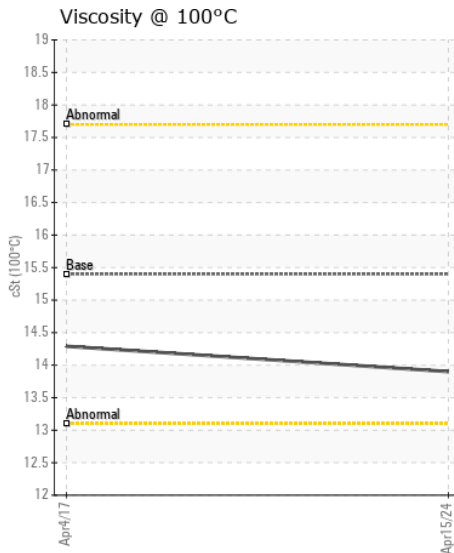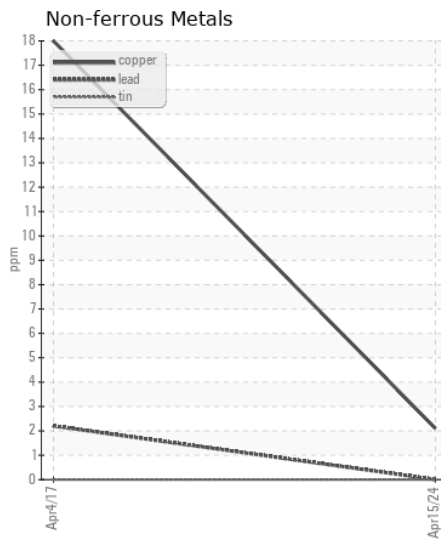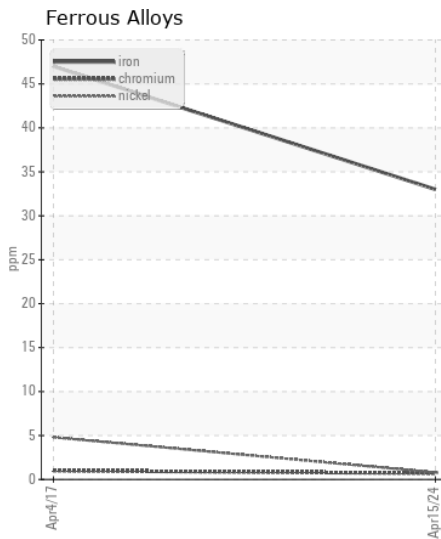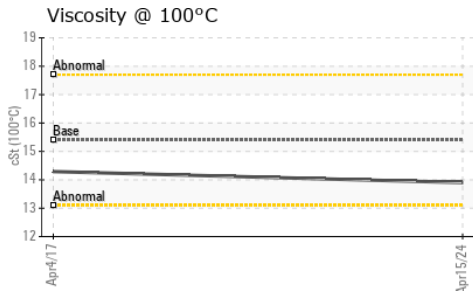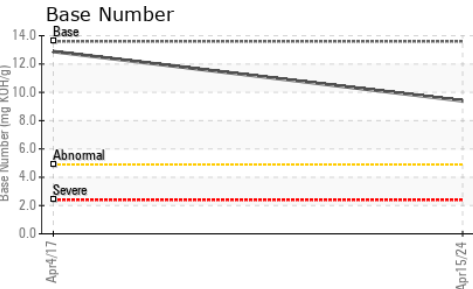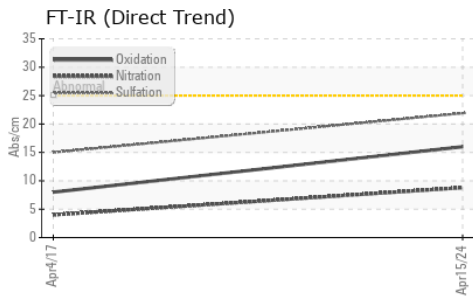

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0172266 **Received** : 24 Apr 2024  
**Lab Number** : 06158848 **Tested** : 25 Apr 2024  
**Unique Number** : 10994271 **Diagnosed** : 25 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - WAKEFIELD**  
 10489 GENERAL MAHONE HWY  
 WAKEFIELD, VA  
 US 23888  
 Contact: BILL ACKER  
 backer@jamesriverequipment.com  
 T: (757)899-3232  
 F: (757)899-6464