



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
812090
 Component
Transmission (Auto)
 Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0118061	GFL0115756	GFL0112358
Sample Date		Client Info		23 Apr 2024	04 Apr 2024	29 Feb 2024
Machine Age	hrs	Client Info		3896	3738	3470
Oil Age	hrs	Client Info		567	409	141
Filter Age	hrs	Client Info		567	409	141
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	52	32	45
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	25	2	22
Lead	ppm	ASTM D5185m	>50	7	0	5
Copper	ppm	ASTM D5185m	>225	12	1	12
Tin	ppm	ASTM D5185m	>10	5	0	4
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	5	6	4
Potassium	ppm	ASTM D5185m	>20	3	0	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	2	6
Boron	ppm	ASTM D5185m		63	76	66
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	1
Magnesium	ppm	ASTM D5185m		3	1	2
Calcium	ppm	ASTM D5185m		113	129	102
Phosphorus	ppm	ASTM D5185m		216	223	202
Zinc	ppm	ASTM D5185m		1	<1	3
Sulfur	ppm	ASTM D5185m		1566	1959	1245
Visc @ 40°C	cSt	ASTM D445	34	29.9	33.0	30.4

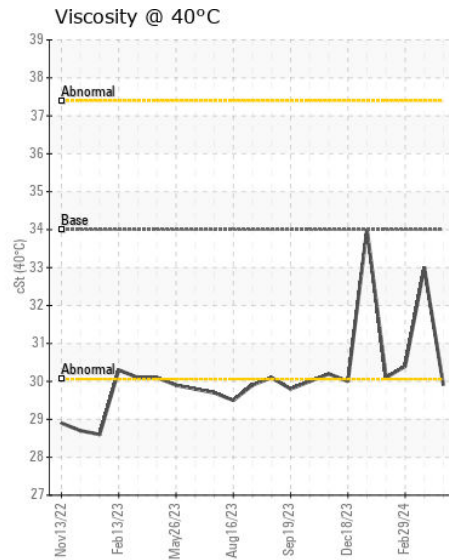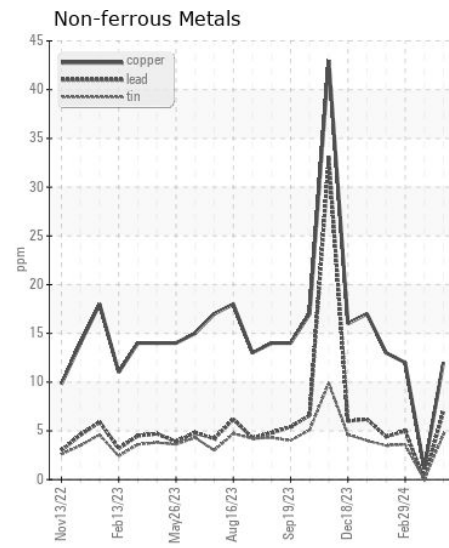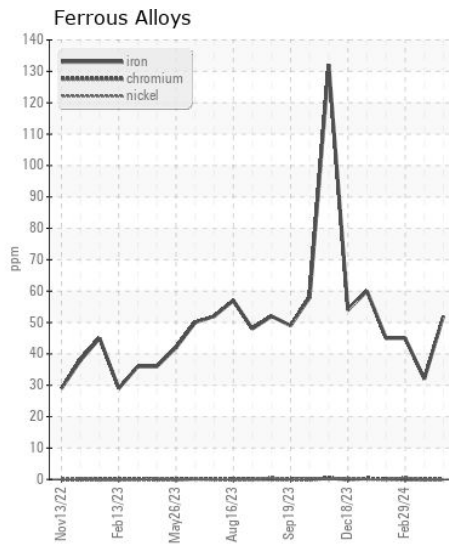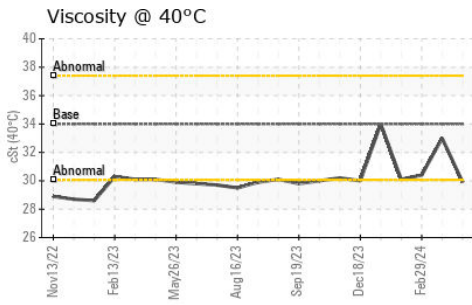

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0118061
Lab Number : 06159522
Unique Number : 10994945
Test Package : FLEET
Received : 24 Apr 2024
Tested : 25 Apr 2024
Diagnosed : 26 Apr 2024 - Jonathan Hester

GFL Environmental - 010 - Stockbridge
 1280 Rum Creek Parkway
 Stockbridge, GA
 US 30281
 Contact: JOSHUA TINKER
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)