



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>ABNORMAL</b>



Machine Id  
**JOHN DEERE 644K 1DW644KZLED664203**  
Component  
**Diesel Engine**  
Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

### RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0213573</b>	JR0020190	JRMC443327
Sample Date		Client Info		<b>24 Apr 2024</b>	21 Jan 2021	09 Aug 2017
Machine Age	hrs	Client Info		<b>9482</b>	7393	3620
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Changed	N/A
Filter Changed		Client Info		<b>N/A</b>	Changed	N/A
Sample Status				<b>ABNORMAL</b>	ABNORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>47</b>	47	15
Chromium	ppm	ASTM D5185m	>11	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>7</b>	7	6
Lead	ppm	ASTM D5185m	>26	<b>4</b>	11	<1
Copper	ppm	ASTM D5185m	>26	<b>6</b>	2	<1
Tin	ppm	ASTM D5185m	>4	<b>2</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION









Sodium and/or potassium levels are high.

Silicon	ppm	ASTM D5185m	>22	<b>18</b>	6	7
Potassium	ppm	ASTM D5185m	>20	<b>▲ 350</b>	9	2
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>1.2</b>	<b>▲ 3.2</b>	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.4</b>	12.3	7.
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.5</b>	31.4	20.
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m	>31	<b>▲ 369</b>	21	2
Boron	ppm	ASTM D5185m		<b>26</b>	65	175
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>14</b>	221	228
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>53</b>	822	844
Calcium	ppm	ASTM D5185m		<b>2506</b>	1627	1317
Phosphorus	ppm	ASTM D5185m		<b>963</b>	848	769
Zinc	ppm	ASTM D5185m		<b>1170</b>	1046	935
Sulfur	ppm	ASTM D5185m		<b>3948</b>	2298	2445
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.2</b>	21.2	14.
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>6.7</b>	7.3	8.10
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.6</b>	16.3	15.09

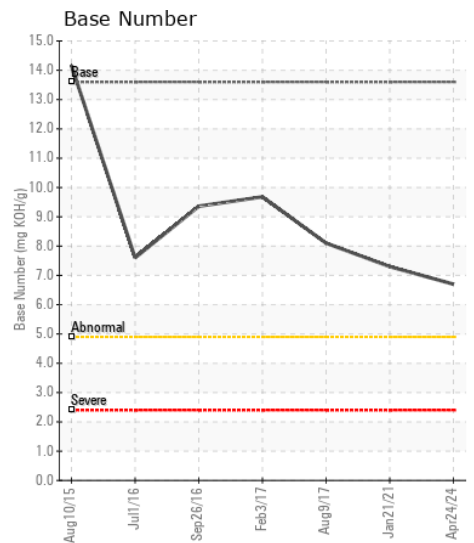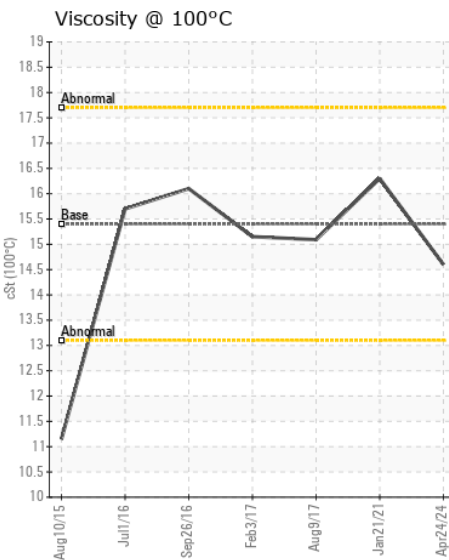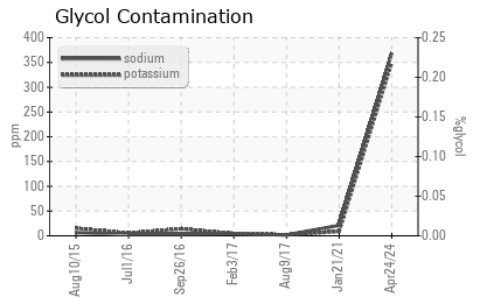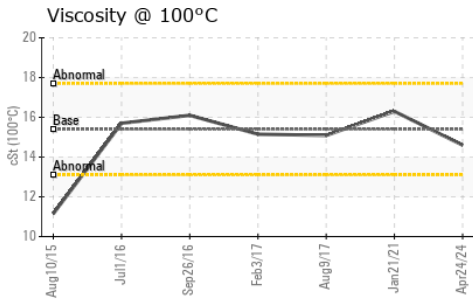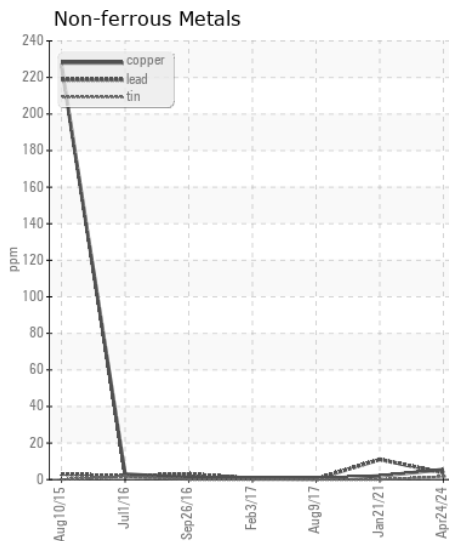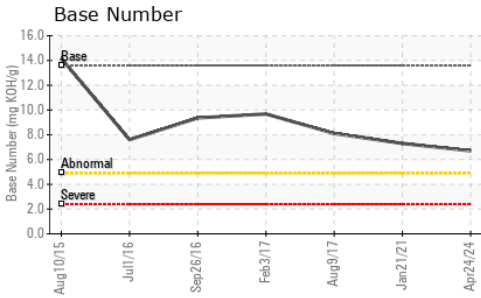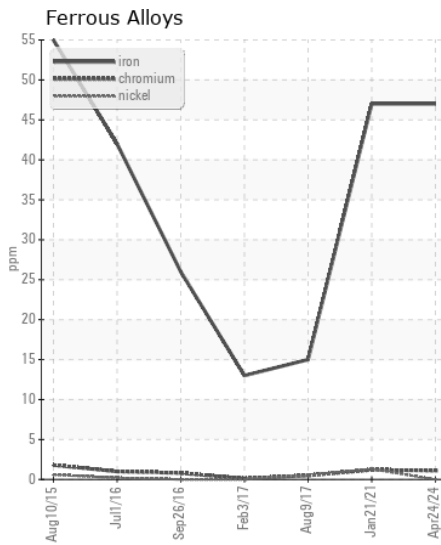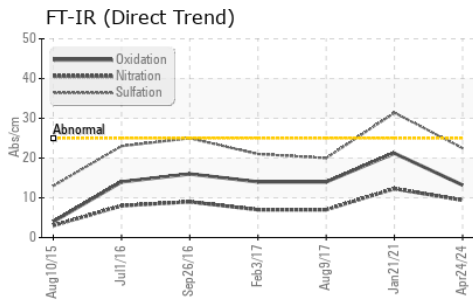

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0213573 **Received** : 25 Apr 2024  
**Lab Number** : 06160117 **Tested** : 30 Apr 2024  
**Unique Number** : 10995540 **Diagnosed** : 30 Apr 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: Glycol, TBN )

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409  
 Contact: NICK GALLAHER  
 NGALLAHER@JRENET.COM  
 T: (336)668-2762  
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)