



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 2 - Beaver [ro#149751]
Machine Id
JOHN DEERE 824K 1DW824KXCED660539
Component
Rear Axle
Fluid
JOHN DEERE HY-GARD HYD/TRANS (12 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0048896	LEC0048558	---
Sample Date		Client Info		22 Apr 2024	21 Mar 2024	---
Machine Age	hrs	Client Info		8063	7974	---
Oil Age	hrs	Client Info		2000	1974	---
Filter Age	hrs	Client Info		1000	1000	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		92	86	---
Iron	ppm	ASTM D5185m	>750	513	483	---
Chromium	ppm	ASTM D5185m	>11	2	2	---
Nickel	ppm	ASTM D5185m	>10	1	2	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>21	4	1	---
Lead	ppm	ASTM D5185m	>49	90	88	---
Copper	ppm	ASTM D5185m	>101	48	39	---
Tin	ppm	ASTM D5185m	>10	3	3	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	26	18	---
Potassium	ppm	ASTM D5185m	>20	0	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	3	3	---
Boron	ppm	ASTM D5185m	6	0	0	---
Barium	ppm	ASTM D5185m	0	1	0	---
Molybdenum	ppm	ASTM D5185m	0	0	0	---
Manganese	ppm	ASTM D5185m		4	4	---
Magnesium	ppm	ASTM D5185m	145	102	103	---
Calcium	ppm	ASTM D5185m	3570	3418	3367	---
Phosphorus	ppm	ASTM D5185m	1290	1138	1048	---
Zinc	ppm	ASTM D5185m	1640	1269	1278	---
Sulfur	ppm	ASTM D5185m		4390	4441	---
Visc @ 40°C	cSt	ASTM D445	57.0	51.1	50.3	---

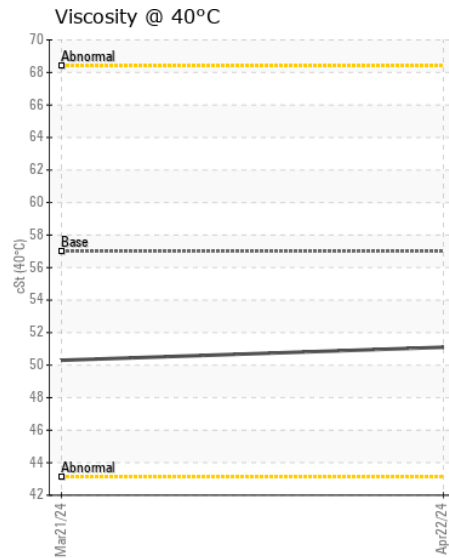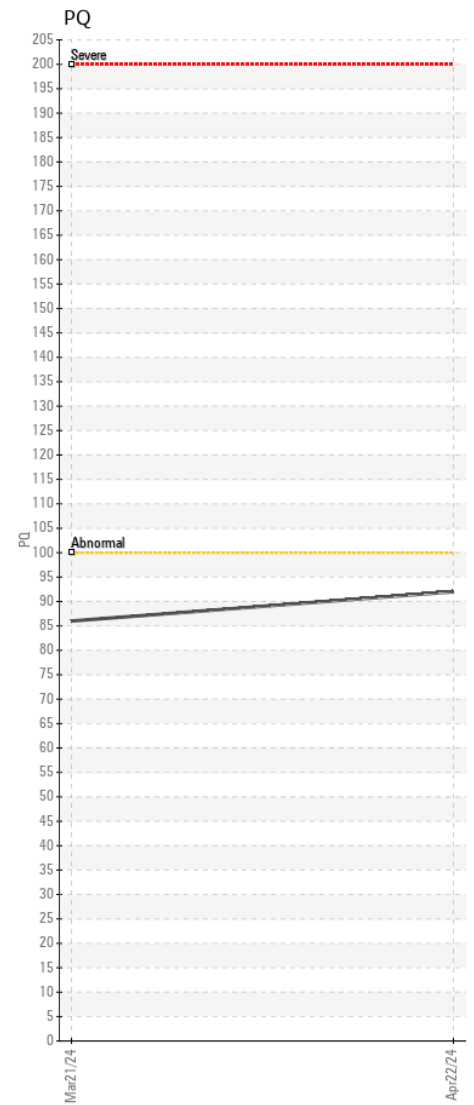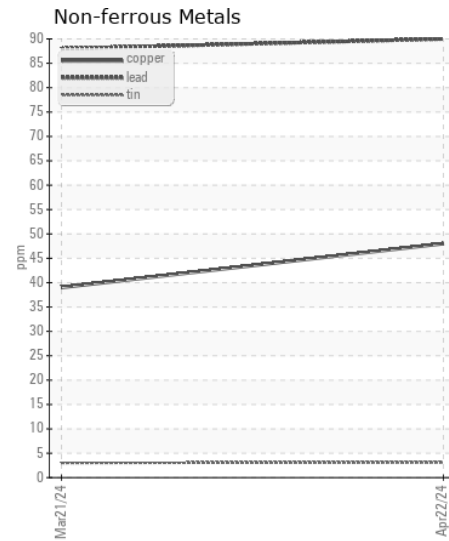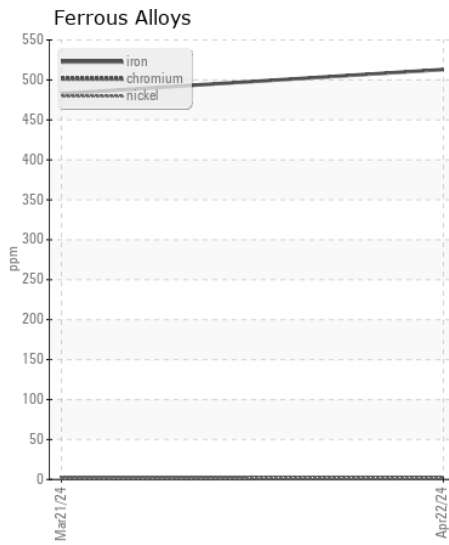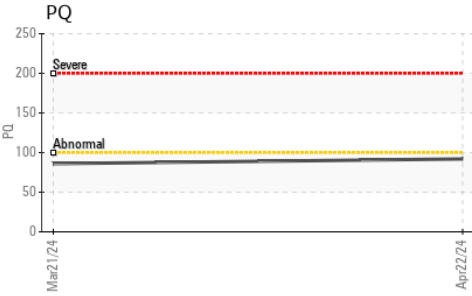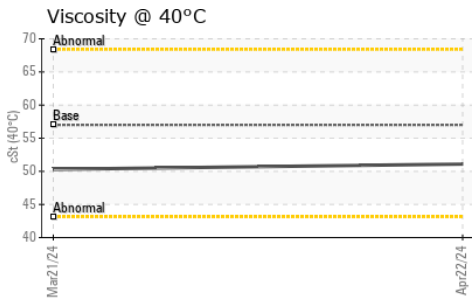

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048896 **Received** : 25 Apr 2024
Lab Number : 06160709 **Tested** : 26 Apr 2024
Unique Number : 10996132 **Diagnosed** : 29 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570