



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 524 P 1DW524PATMLT11426
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0206635	JR0188468	---
Sample Date		Client Info		24 Apr 2024	07 Sep 2023	---
Machine Age	hrs	Client Info		2661	1987	---
Oil Age	hrs	Client Info		2661	1987	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Chngd	Not Chngd	---
Filter Changed		Client Info		Not Chngd	Not Chngd	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	<1	<1	---
Chromium	ppm	ASTM D5185m	>10	4	0	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	<1	<1	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>75	0	0	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	2	<1	---
Potassium	ppm	ASTM D5185m	>20	5	1	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>5000	3951	▲ 16862	---
Particles >6µm		ASTM D7647	>1300	380	● 1625	---
Particles >14µm		ASTM D7647	>160	28	18	---
Particles >21µm		ASTM D7647	>40	5	4	---
Particles >38µm		ASTM D7647	>10	0	0	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/16/12	▲ 21/18/11	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	<1	---
Boron	ppm	ASTM D5185m		2	7	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		2	8	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m		0	21	---
Calcium	ppm	ASTM D5185m	87	103	132	---
Phosphorus	ppm	ASTM D5185m	727	566	669	---
Zinc	ppm	ASTM D5185m	900	759	872	---
Sulfur	ppm	ASTM D5185m	1500	1745	1962	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.56	0.88	---
Visc @ 40°C	cSt	ASTM D445	65	58.5	62.9	---

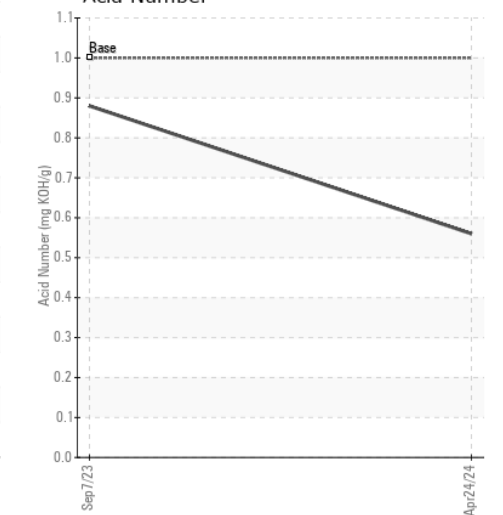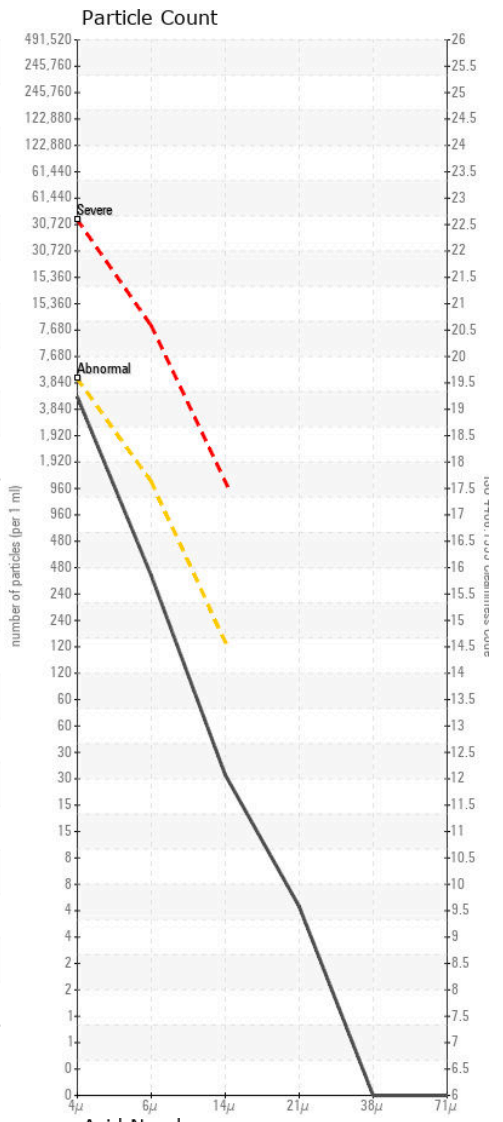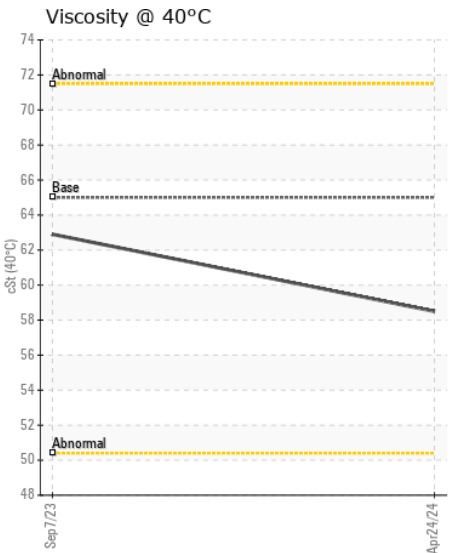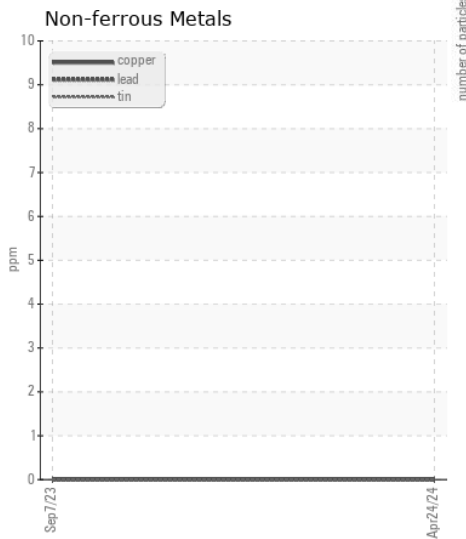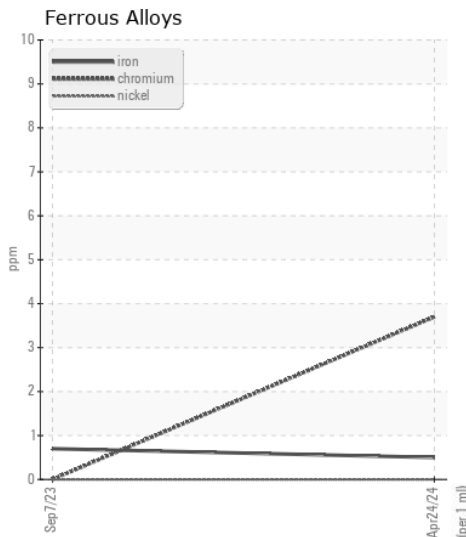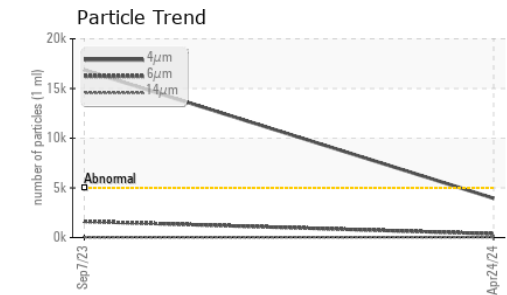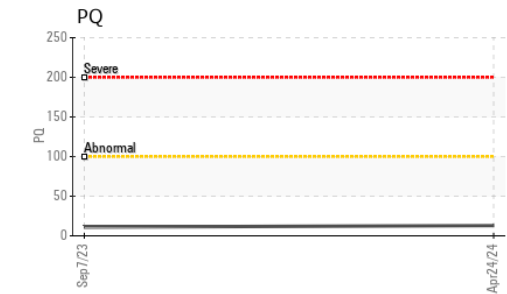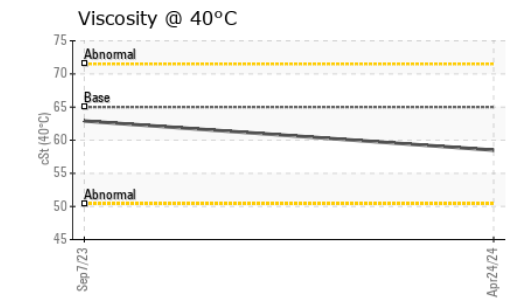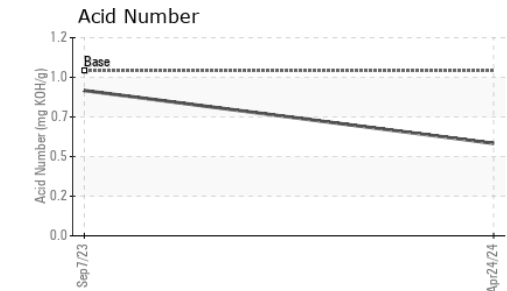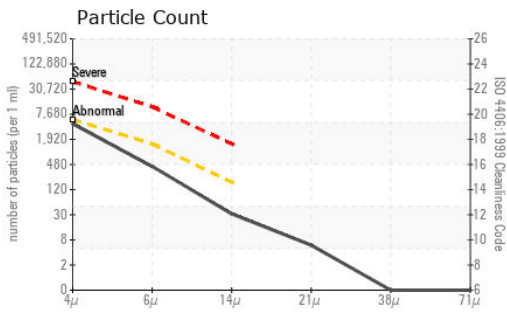

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0206635 **Received** : 26 Apr 2024
Lab Number : 06161371 **Tested** : 29 Apr 2024
Unique Number : 10996794 **Diagnosed** : 29 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CARLTON'S BACKHOE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: LEO

T: (704)547-0211

F: