



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[UNITED RENTALS]
 Machine Id
VOLVO A25G 742179
 Component
Rear Right Final Drive
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0003017	VCP296184	---
Sample Date		Client Info		28 Apr 2024	10 Mar 2021	---
Machine Age	hrs	Client Info		2183	1743	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Changed	---
Filter Changed		Client Info		N/A	Not Changed	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185m	>900	81	505	---
Chromium	ppm	ASTM D5185m	>20	1	10	---
Nickel	ppm	ASTM D5185m	>10	<1	4	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	0	<1	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>150	5	23	---
Tin	ppm	ASTM D5185m	>20	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>50	4	4	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	MODER	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Sodium	ppm	ASTM D5185m		3	4	---
Boron	ppm	ASTM D5185m		280	194	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	4	---
Manganese	ppm	ASTM D5185m		3	21	---
Magnesium	ppm	ASTM D5185m		0	0	---
Calcium	ppm	ASTM D5185m		30	37	---
Phosphorus	ppm	ASTM D5185m		2155	1564	---
Zinc	ppm	ASTM D5185m		14	17	---
Sulfur	ppm	ASTM D5185m		31666	22984	---
Visc @ 40°C	cSt	ASTM D445		53.0	62.6	---

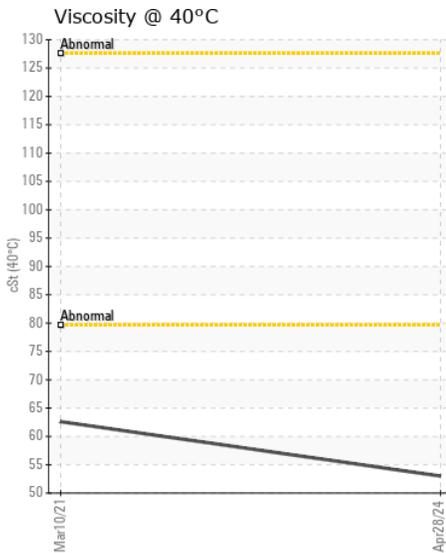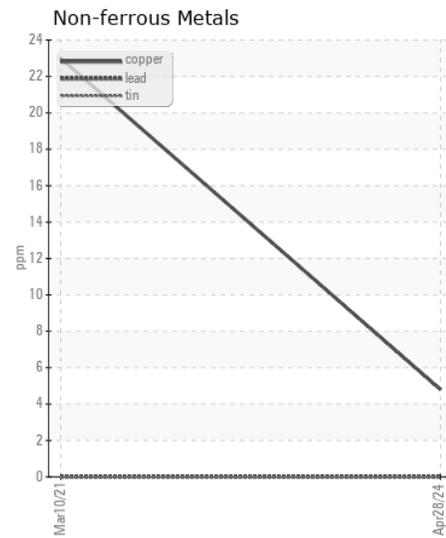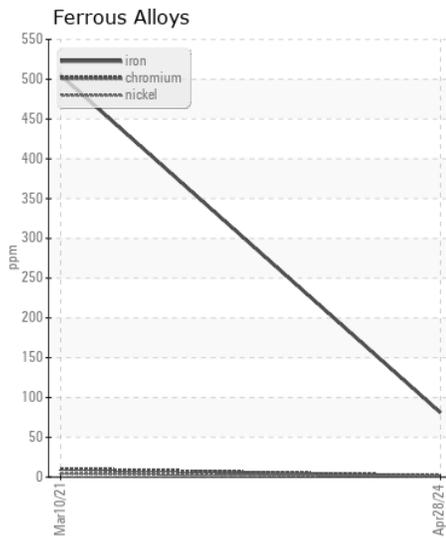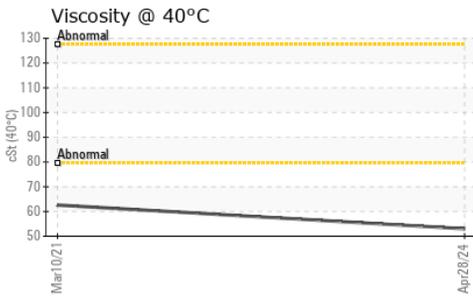

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0003017
Lab Number : 06174302
Unique Number : 11020355
Test Package : CONST

Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

160 - ASCENDUM MACHINERY INC - MILLS RIVER
 215 FANNING FIELDS RD
 MILLS RIVER, NC
 US 28759
 Contact: CORY PENLAND
 cory.penland@ascendummachinery.com
 T: (828)687-0620
 F: (828)687-0622

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)