



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[UNITED RENTALS]
 Machine Id
VOLVO A25G 742179
 Component
Bogie/Center Axle
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0003023	ASC0003014	VCP296686
Sample Date		Client Info		28 Apr 2024	28 Apr 2024	10 Mar 2021
Machine Age	hrs	Client Info		2183	2183	1743
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	Changed
Filter Changed		Client Info		N/A	N/A	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185m	>900	57	60	296
Chromium	ppm	ASTM D5185m	>20	<1	<1	7
Nickel	ppm	ASTM D5185m	>10	<1	<1	4
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	0	0	<1
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>150	5	5	22
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>50	<1	2	3
Potassium	ppm	ASTM D5185m	>20	<1	1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		3	3	4
Boron	ppm	ASTM D5185m		277	275	185
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	5
Manganese	ppm	ASTM D5185m		3	3	18
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m		32	34	41
Phosphorus	ppm	ASTM D5185m		2147	2197	1463
Zinc	ppm	ASTM D5185m		15	16	19
Sulfur	ppm	ASTM D5185m		31411	31906	22449
Visc @ 40°C	cSt	ASTM D445		52.4	52.9	61.3

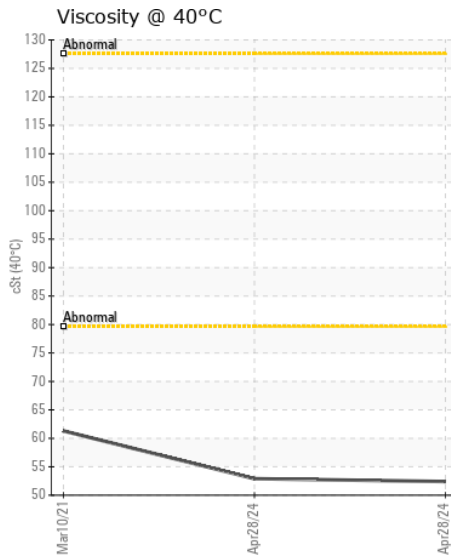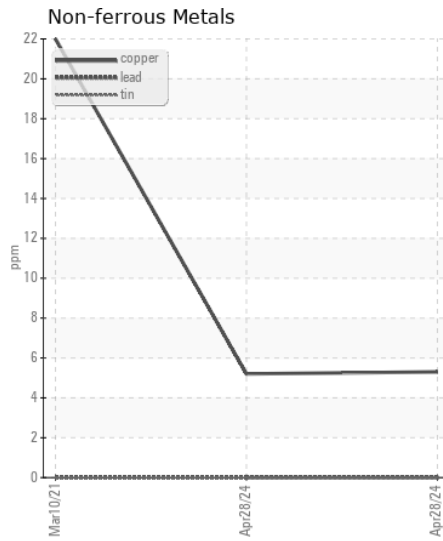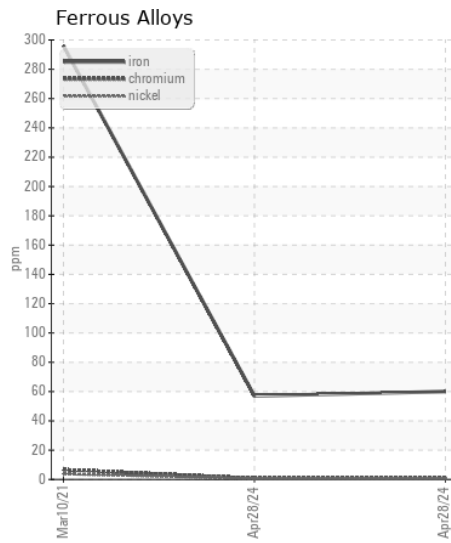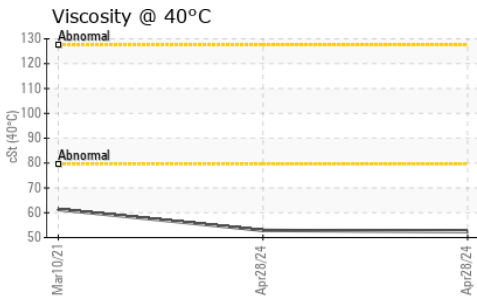

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0003023
Lab Number : 06174303
Unique Number : 11020356
Test Package : CONST

Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

160 - ASCENDUM MACHINERY INC - MILLS RIVER
 215 FANNING FIELDS RD
 MILLS RIVER, NC
 US 28759
 Contact: CORY PENLAND
 cory.penland@ascendummachinery.com
 T: (828)687-0620
 F: (828)687-0622

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)