



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>ATTENTION</b>

Machine Id  
**JOHN DEERE 310SL 1T0310SLAKF356390**

Component  
**Front Differential**

Fluid  
**JOHN DEERE GL-5 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0207797</b>	---	---
Sample Date		Client Info		<b>03 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>1528</b>	---	---
Oil Age	hrs	Client Info		<b>1528</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ATTENTION</b>	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>643</b>	---	---
Iron	ppm	ASTM D5185m	>500	<b>236</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>44</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>MODER</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>15</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Water		WC Method	>.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	---	---

### FLUID CONDITION

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		<b>11</b>	---	---
Boron	ppm	ASTM D5185m		<b>117</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>11</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>13</b>	---	---
Calcium	ppm	ASTM D5185m		<b>3446</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1179</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1433</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3979</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>55.4</b>	---	---

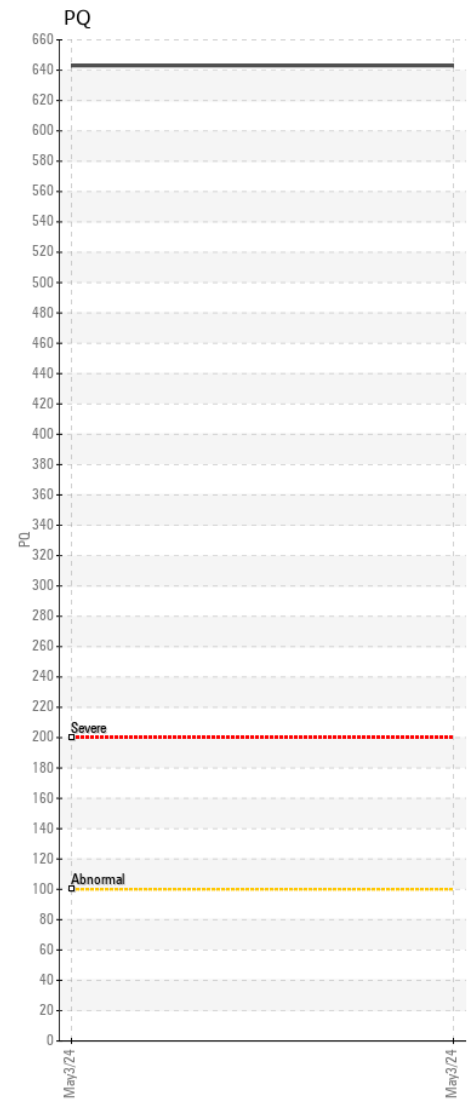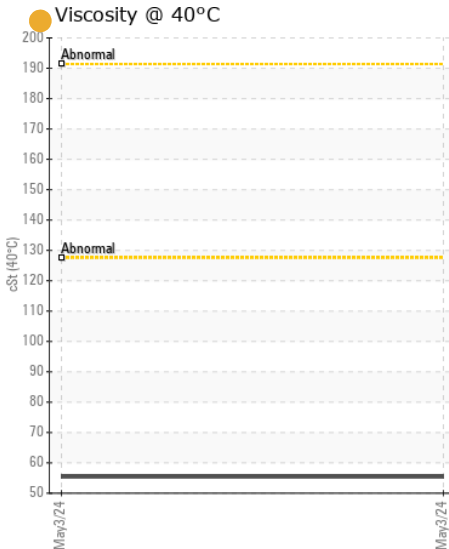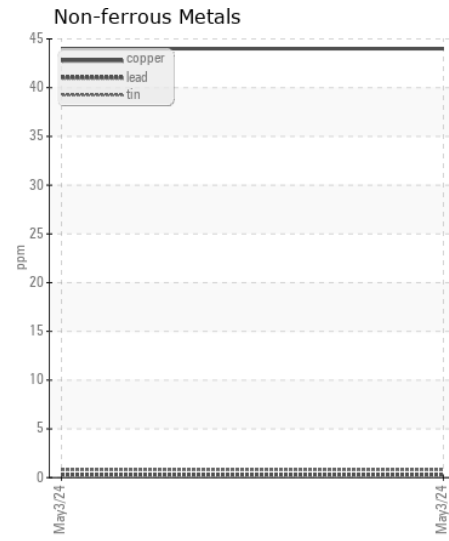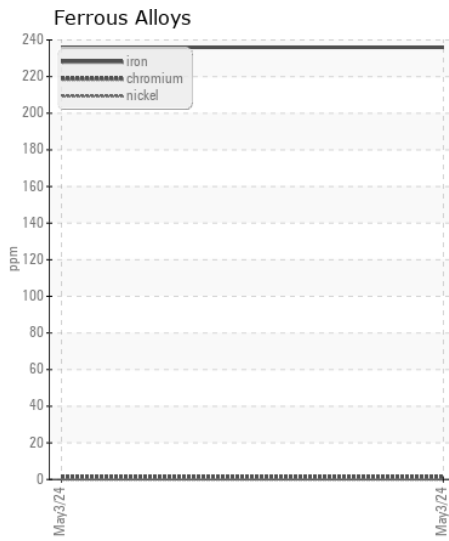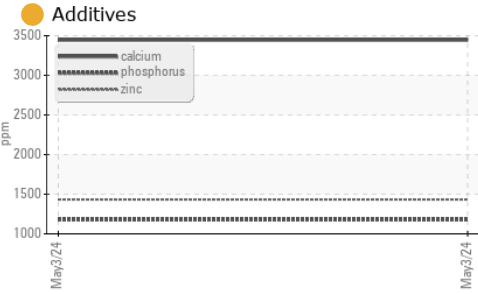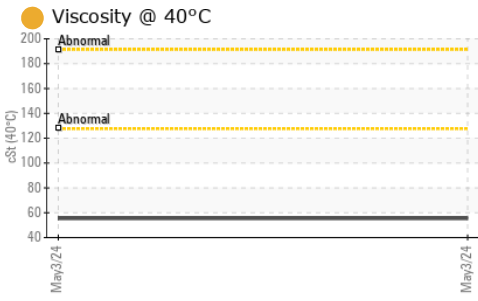

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0207797 **Received** : 09 May 2024  
**Lab Number** : 06174760 **Tested** : 10 May 2024  
**Unique Number** : 11020813 **Diagnosed** : 13 May 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - ASHEVILLE**  
 101 BRUCE DRIVE  
 ASHEVILLE, NC  
 US 28806

Contact: Randy Warren  
 randy.warren@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (528)667-0176  
 F: (828)667-4865