



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 310SL 1T0310SLAKF356390**  
 Component  
**Front Left Final Drive**  
 Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0207795</b>	---	---
Sample Date		Client Info		<b>03 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>1528</b>	---	---
Oil Age	hrs	Client Info		<b>1528</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>404</b>	---	---
Iron	ppm	ASTM D5185m	>750	<b>262</b>	---	---
Chromium	ppm	ASTM D5185m	>9	<b>4</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>40	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>40	<b>1</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>14</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Water		WC Method	>0.075	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>12</b>	---	---
Boron	ppm	ASTM D5185m	6	<b>116</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>5</b>	---	---
Magnesium	ppm	ASTM D5185m	145	<b>14</b>	---	---
Calcium	ppm	ASTM D5185m	3570	<b>3493</b>	---	---
Phosphorus	ppm	ASTM D5185m	1290	<b>1144</b>	---	---
Zinc	ppm	ASTM D5185m	1640	<b>1426</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>4201</b>	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>54.2</b>	---	---

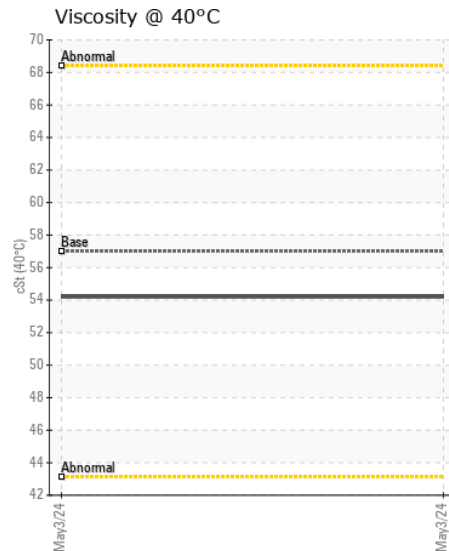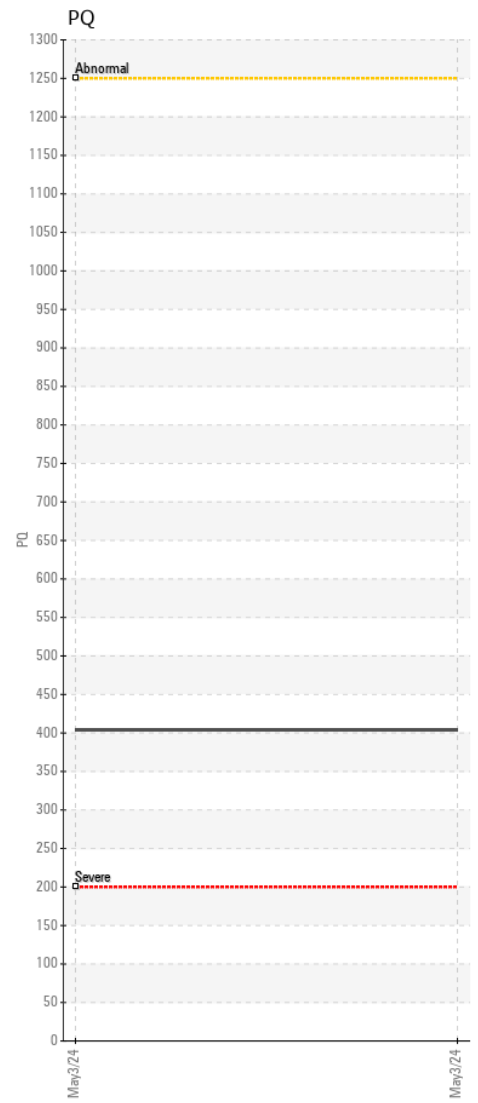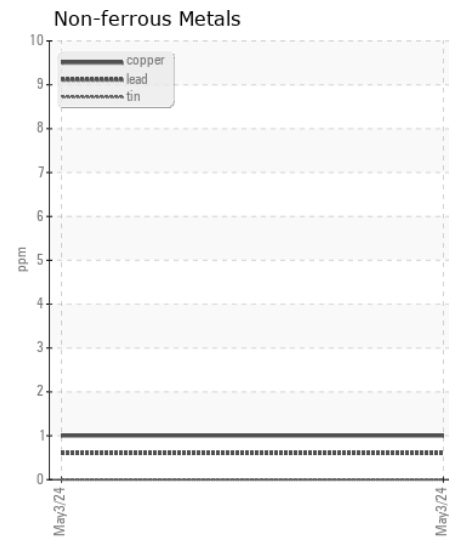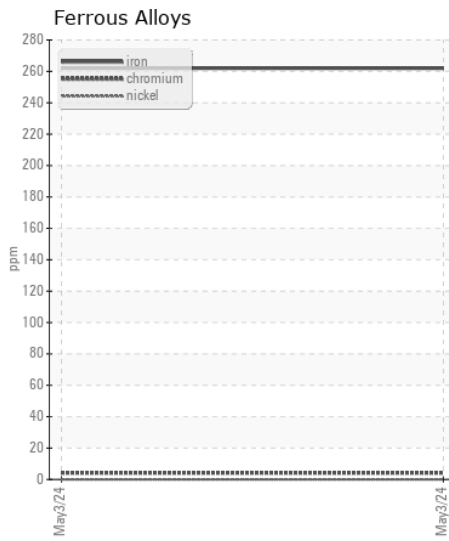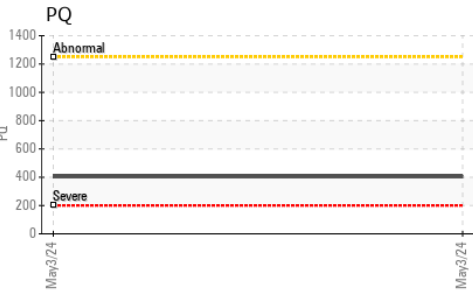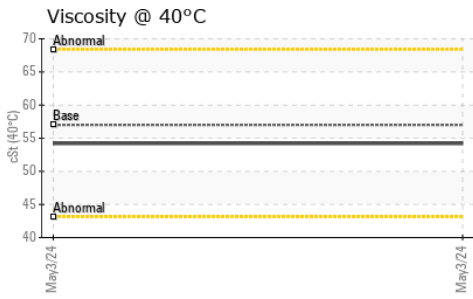

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0207795 **Received** : 09 May 2024  
**Lab Number** : 06174762 **Tested** : 10 May 2024  
**Unique Number** : 11020815 **Diagnosed** : 13 May 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - ASHEVILLE**  
 101 BRUCE DRIVE  
 ASHEVILLE, NC  
 US 28806

Contact: Randy Warren  
 randy.warren@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (528)667-0176  
 F: (828)667-4865