



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**(34736UA)**  
Machine Id  
**426034-4678**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0091855</b>	GFL0112766	GFL0101317
Sample Date		Client Info		<b>04 May 2024</b>	14 Feb 2024	10 Jan 2024
Machine Age	hrs	Client Info		<b>40451</b>	40001	39747
Oil Age	hrs	Client Info		<b>40451</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Changed	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Changed	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>23</b>	23	50
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	1	2
Lead	ppm	ASTM D5185m	>40	<b>2</b>	0	2
Copper	ppm	ASTM D5185m	>330	<b>1</b>	<1	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	4	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	1
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>3.7</b>	2.7	▲ 5.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.1</b>	7.3	15.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.2</b>	21.8	30.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	<1	1
Boron	ppm	ASTM D5185m	0	<b>0</b>	3	10
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>60</b>	51	62
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>912</b>	850	936
Calcium	ppm	ASTM D5185m	1070	<b>1030</b>	915	1070
Phosphorus	ppm	ASTM D5185m	1150	<b>1002</b>	982	1006
Zinc	ppm	ASTM D5185m	1270	<b>1170</b>	1121	1195
Sulfur	ppm	ASTM D5185m	2060	<b>2925</b>	2770	2860
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.4</b>	12.8	23.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.4</b>	8.2	▲ 0.0
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.8</b>	14.1	▲ 17.0

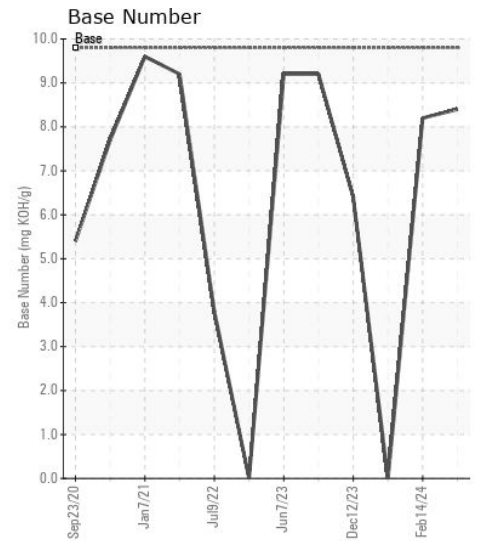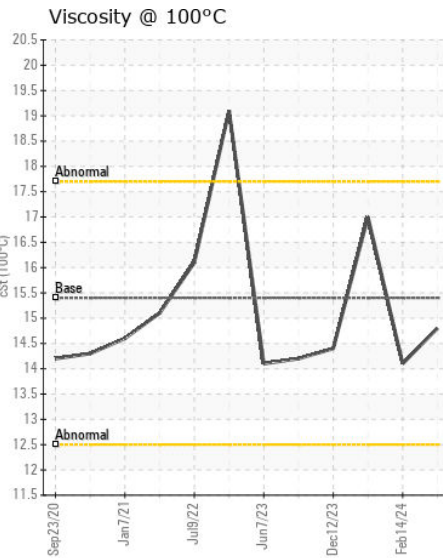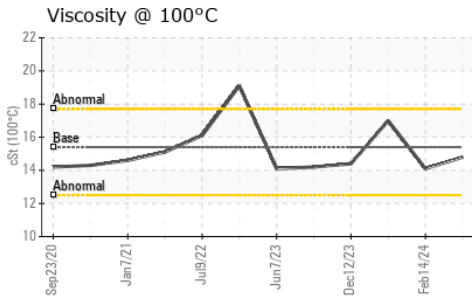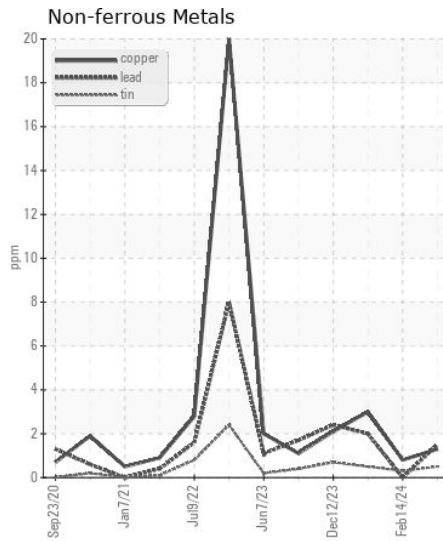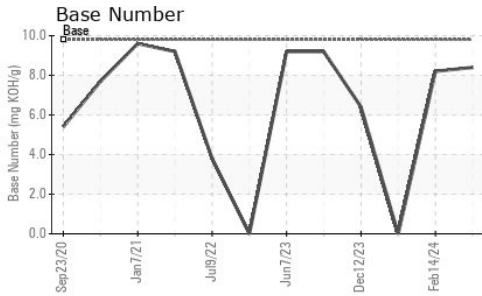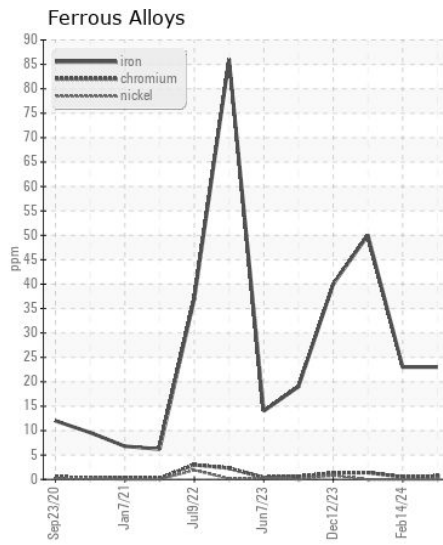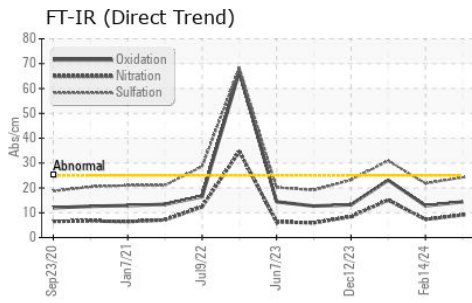

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091855  
**Lab Number** : 06174889  
**Unique Number** : 11020942  
**Test Package** : FLEET

**Received** : 09 May 2024  
**Tested** : 10 May 2024  
**Diagnosed** : 10 May 2024 - Wes Davis

**GFL Environmental - 654 - Richmond Hauling**  
 11800 Lewis Road  
 Chester, VA  
 US 23831

Contact: Jimmy Mayes  
 jmayes@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: