



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
NWW GREENWOOD

Machine Id
DT697

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (38 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0102320	---	---
Sample Date		Client Info		26 Apr 2024	---	---
Machine Age	mls	Client Info		206449	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	15	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	5	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	0	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	4	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.8	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.7	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	2	6	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	50	68	---	---
Manganese	ppm	ASTM D5185m	0	<1	---	---
Magnesium	ppm	ASTM D5185m	950	886	---	---
Calcium	ppm	ASTM D5185m	1050	1199	---	---
Phosphorus	ppm	ASTM D5185m	995	1070	---	---
Zinc	ppm	ASTM D5185m	1180	1269	---	---
Sulfur	ppm	ASTM D5185m	2600	3336	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.2	---	---
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	---	---


FT-IR (Direct Trend)

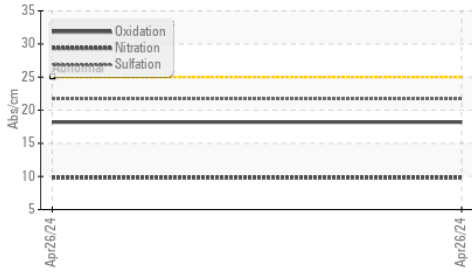


Base Number

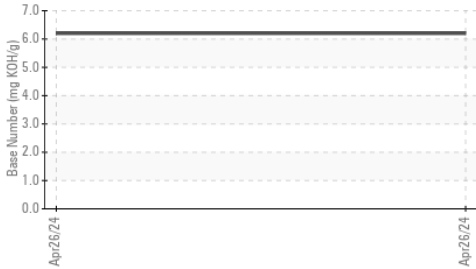


Viscosity @ 100°C

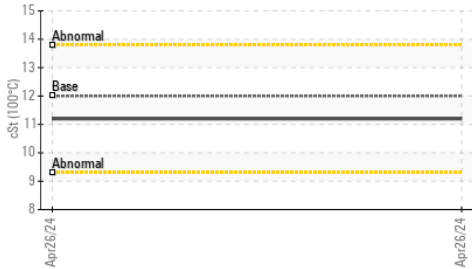


Ferrous Alloys

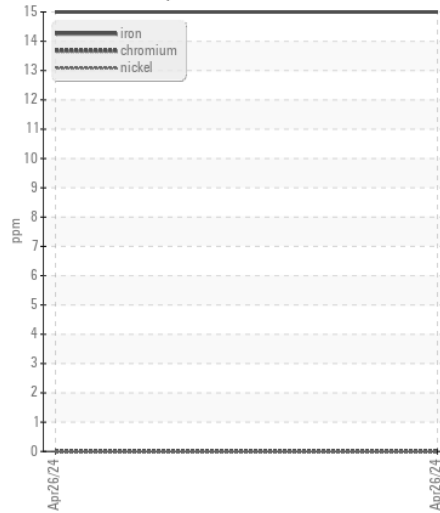


Non-ferrous Metals

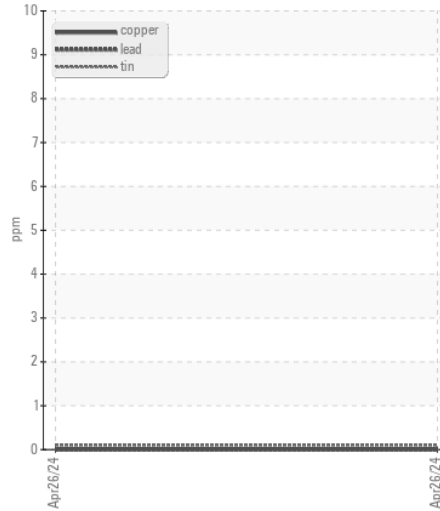

Viscosity @ 100°C

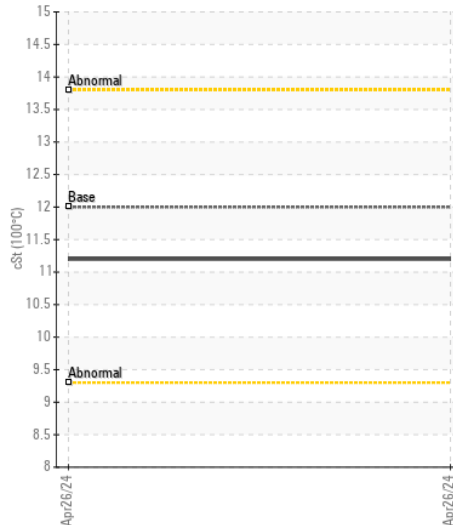

Base Number

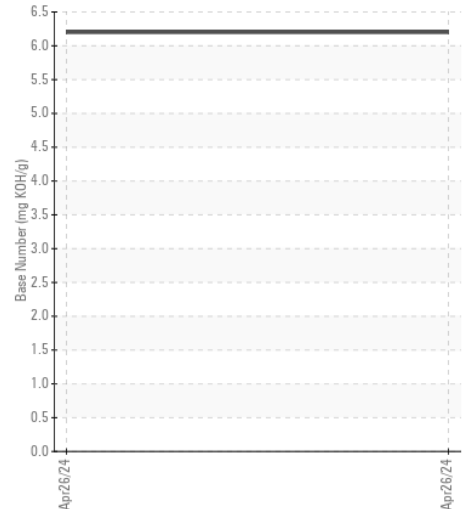

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0102320
Lab Number : 06175303
Unique Number : 11021356
Test Package : FLEET

Received : 10 May 2024
Tested : 13 May 2024
Diagnosed : 13 May 2024 - Wes Davis

NW WHITE & CO - GREENWOOD DIVISION
 411 QUARRY ROAD
 GREENWOOD, SC
 US 29149

Contact: Mitchell Brown
 greenwoodshop@nwwhite.com

T: (864)389-9553

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: