



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
UPAP-Orlando [SPM702848]
Machine Id
624914 VOLVO L90H 624914
Component
Rear Right Final Drive
Fluid
VOLVO WET BRAKE TRANSAXLE OIL (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP450981	---	---
Sample Date		Client Info		06 May 2024	---	---
Machine Age	hrs	Client Info		10411	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1000	64	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>25	1	---	---
Copper	ppm	ASTM D5185m	>30	20	---	---
Tin	ppm	ASTM D5185m	>10	2	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	15	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	100	29	---	---
Barium	ppm	ASTM D5185m	0	2	---	---
Molybdenum	ppm	ASTM D5185m	0	1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	0	16	---	---
Calcium	ppm	ASTM D5185m	3800	4176	---	---
Phosphorus	ppm	ASTM D5185m	1200	1561	---	---
Zinc	ppm	ASTM D5185m	1500	1839	---	---
Sulfur	ppm	ASTM D5185m	6500	6078	---	---
Visc @ 40°C	cSt	ASTM D445	52.0	41.4	---	---

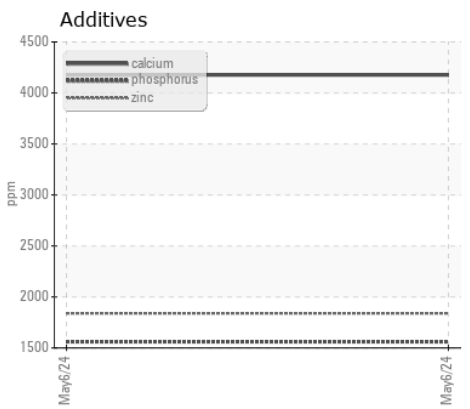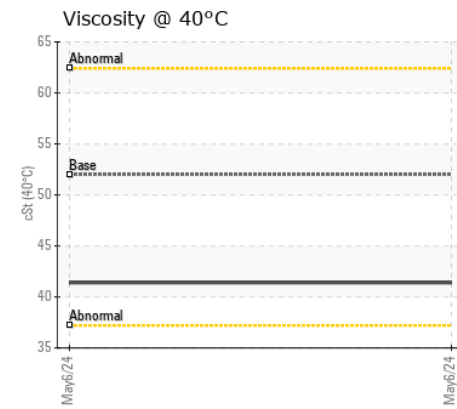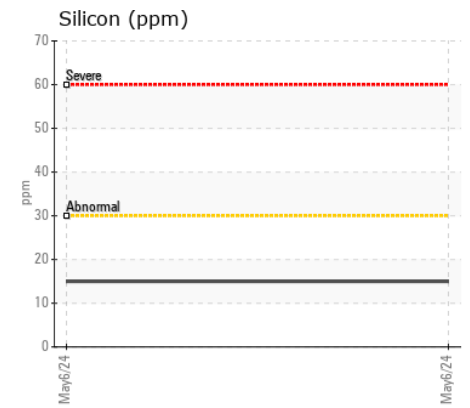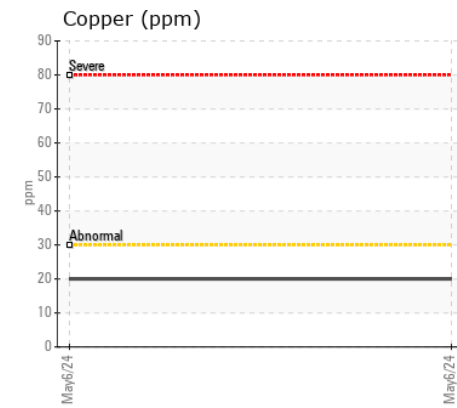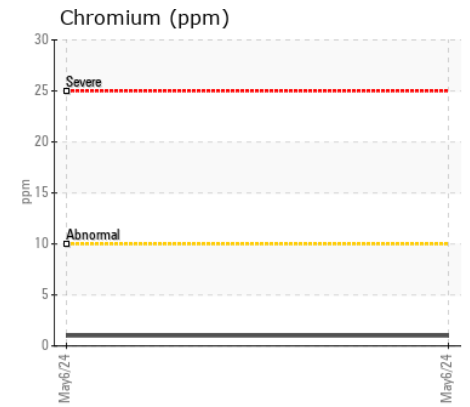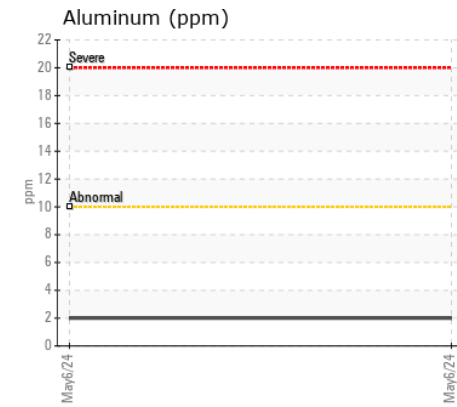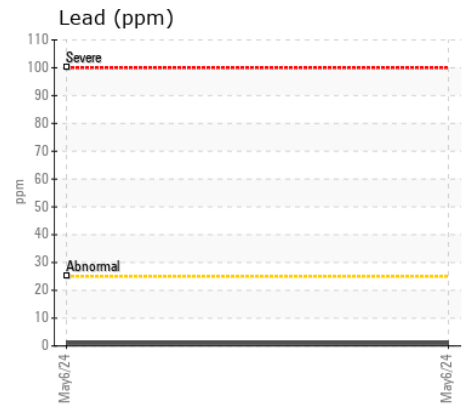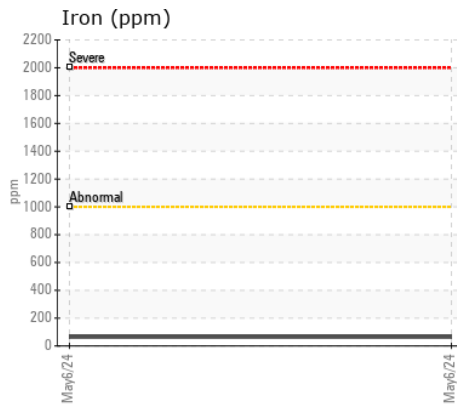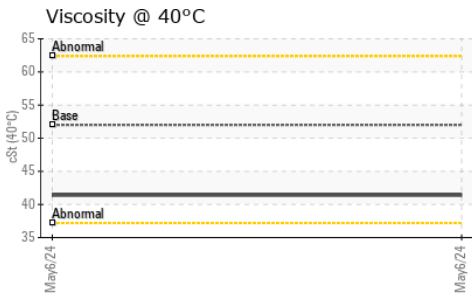

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : VCP450981
 Lab Number : 06175891
 Unique Number : 11021944
 Test Package : MOB 1

Received : 10 May 2024
 Tested : 13 May 2024
 Diagnosed : 13 May 2024 - Wes Davis

U-PULL-AND-PAY LLC - ORLANDO
 1157 JETSTREAM DRIVE
 ORLANDO, FL
 US 32824

Contact: NILDA RIOS
 nilda.rios@upullandpay.com
 T: (407)473-3798
 F: (407)856-4029

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)