



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO EC350E 314739
Component
Right Travel
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0001326	---	---
Sample Date		Client Info		01 May 2024	---	---
Machine Age	hrs	Client Info		1006	---	---
Oil Age	hrs	Client Info		1006	---	---
Filter Age	hrs	Client Info		1006	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	43	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>100	2	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>50	<1	---	---
Tin	ppm	ASTM D5185m	>5	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	2	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Water		WC Method	>0.25	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.25	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	111	191	---	---
Barium	ppm	ASTM D5185m	0.0	3	---	---
Molybdenum	ppm	ASTM D5185m	0.9	<1	---	---
Manganese	ppm	ASTM D5185m	0.0	<1	---	---
Magnesium	ppm	ASTM D5185m	39	1	---	---
Calcium	ppm	ASTM D5185m	93	11	---	---
Phosphorus	ppm	ASTM D5185m	920	994	---	---
Zinc	ppm	ASTM D5185m	104	27	---	---
Sulfur	ppm	ASTM D5185m	20179	20973	---	---
Visc @ 40°C	cSt	ASTM D445	333	289	---	---

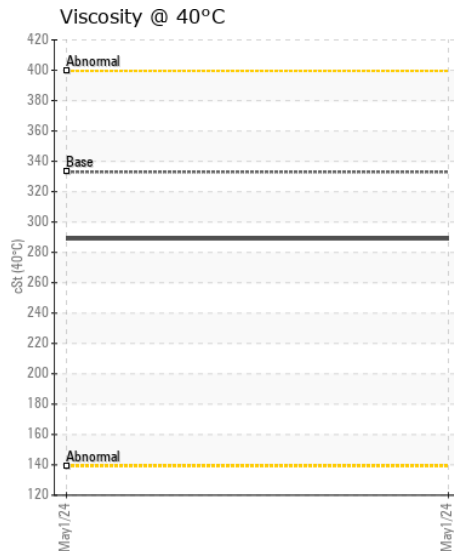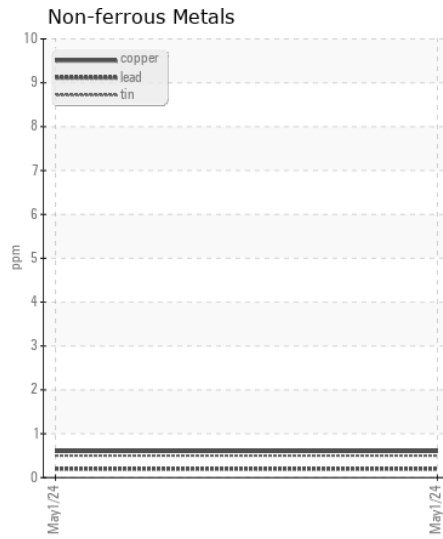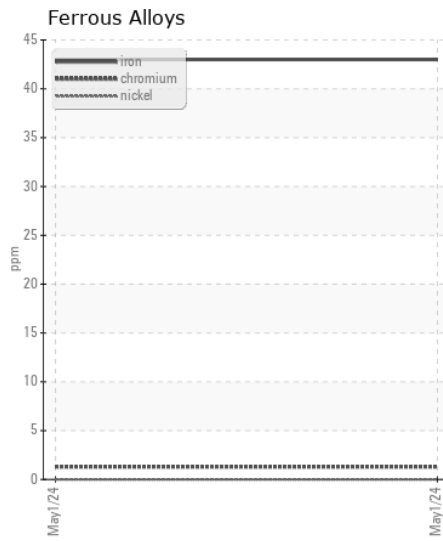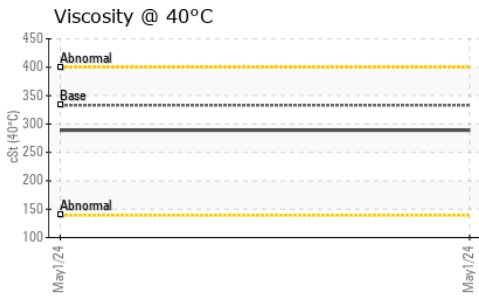

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001326
Lab Number : 06175916
Unique Number : 11021969
Test Package : CONST

Received : 10 May 2024
Tested : 13 May 2024
Diagnosed : 14 May 2024 - Sean Felton

RECYCLE 1
 4700 LAWRENCE ST
 HYATTSVILLE, MD
 US 20781

Contact: MIKE DESJARDINS
 mdesjarkins@wbwaste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: