



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**VOLVO ECR88D 219240**

Component  
**Diesel Engine**

Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0003004	---	---
Sample Date		Client Info		10 May 2024	---	---
Machine Age	hrs	Client Info		213	---	---
Oil Age	hrs	Client Info		213	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

### WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	15	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>25	4	---	---
Lead	ppm	ASTM D5185m	>40	1	---	---
Copper	ppm	ASTM D5185m	>330	28	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	11	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		9	---	---
Barium	ppm	ASTM D5185m		3	---	---
Molybdenum	ppm	ASTM D5185m		10	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		98	---	---
Calcium	ppm	ASTM D5185m		2456	---	---
Phosphorus	ppm	ASTM D5185m		923	---	---
Zinc	ppm	ASTM D5185m		1044	---	---
Sulfur	ppm	ASTM D5185m		4761	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.10	---	---
Visc @ 100°C	cSt	ASTM D445		13.1	---	---

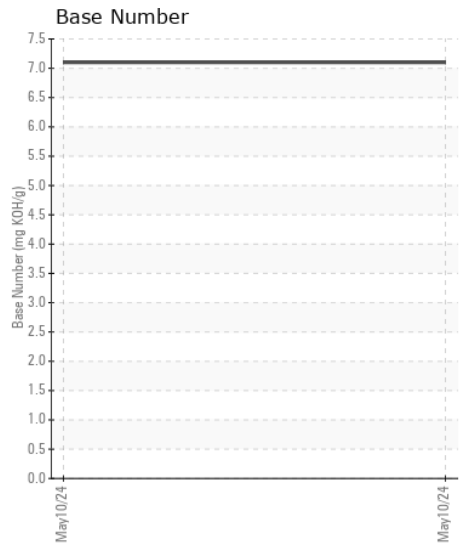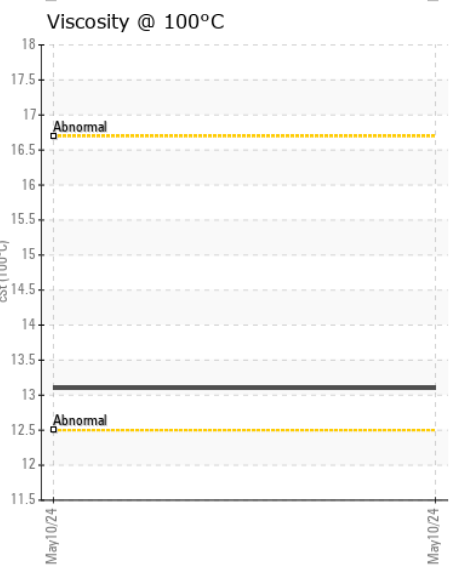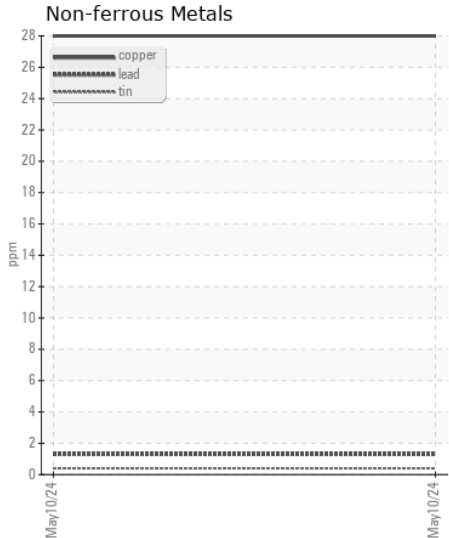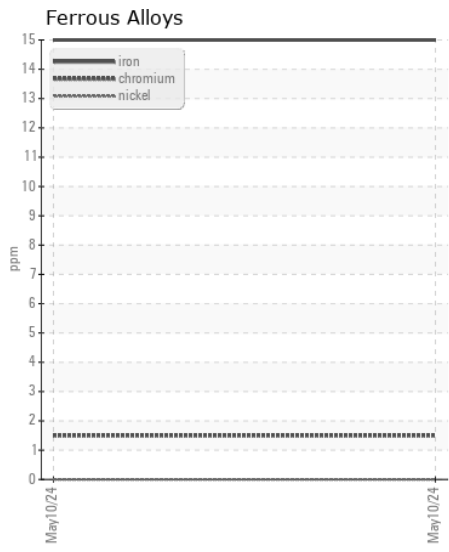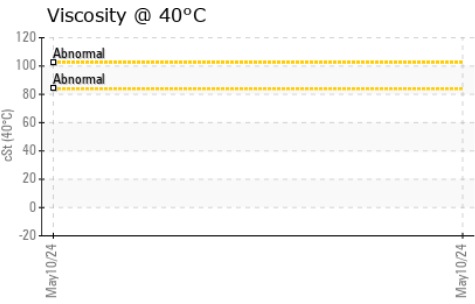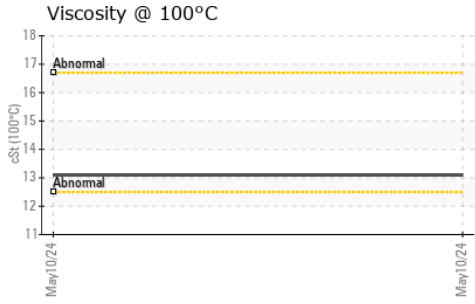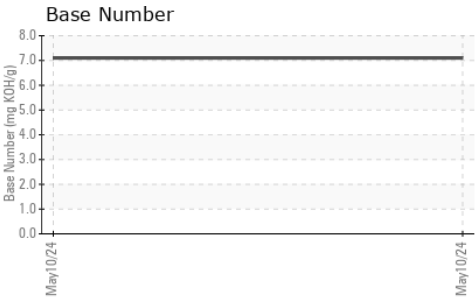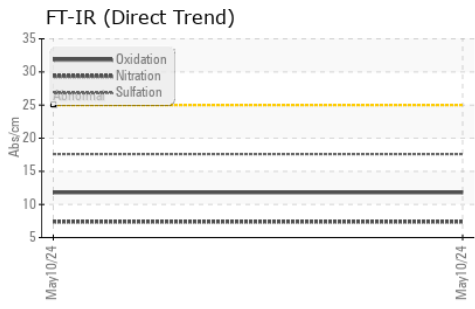

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0003004 **Received** : 13 May 2024  
**Lab Number** : 06176953 **Tested** : 15 May 2024  
**Unique Number** : 11023006 **Diagnosed** : 15 May 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: KV40, TBN )

**160 - ASCENDUM MACHINERY INC - MILLS RIVER**  
 215 FANNING FIELDS RD  
 MILLS RIVER, NC  
 US 28759  
 Contact: CORY PENLAND  
 cory.penland@ascendummachinery.com  
 T: (828)687-0620  
 F: (828)687-0622

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)