



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 624L 1DW624LZCMF709675

Component
Transmission (Manual)

Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0213308	JR0194287	JR0187148
Sample Date		Client Info		12 May 2024	23 Jan 2024	09 Oct 2023
Machine Age	hrs	Client Info		6280	5800	5200
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	15	15	16
Iron	ppm	ASTM D5185m	>200	15	13	20
Chromium	ppm	ASTM D5185m	>5	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>7	0	0	0
Aluminum	ppm	ASTM D5185m	>25	3	1	0
Lead	ppm	ASTM D5185m	>45	<1	0	0
Copper	ppm	ASTM D5185m	>225	3	3	4
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	12	10	12
Potassium	ppm	ASTM D5185m	>20	3	2	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	0	5
Boron	ppm	ASTM D5185m	6	23	21	2
Barium	ppm	ASTM D5185m	0	2	0	<1
Molybdenum	ppm	ASTM D5185m	0	19	19	3
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	145	142	143	96
Calcium	ppm	ASTM D5185m	3570	3260	3105	3148
Phosphorus	ppm	ASTM D5185m	1290	1160	896	1007
Zinc	ppm	ASTM D5185m	1640	1170	1159	1153
Sulfur	ppm	ASTM D5185m		4046	3424	4230
Visc @ 40°C	cSt	ASTM D445	57.0	52.2	53.1	48.3

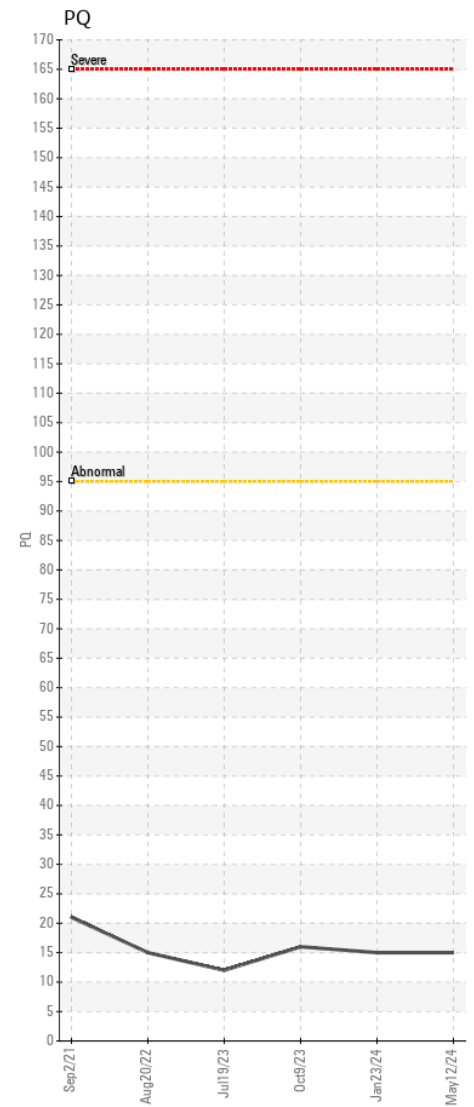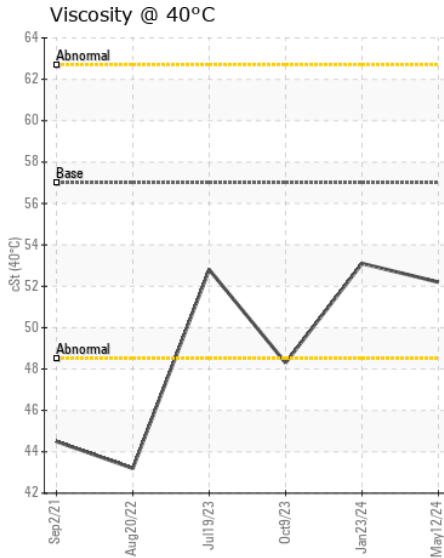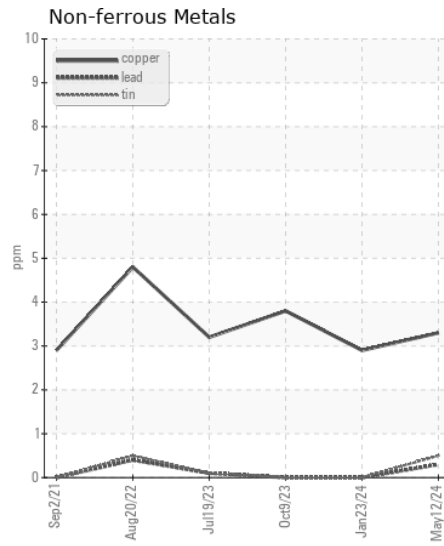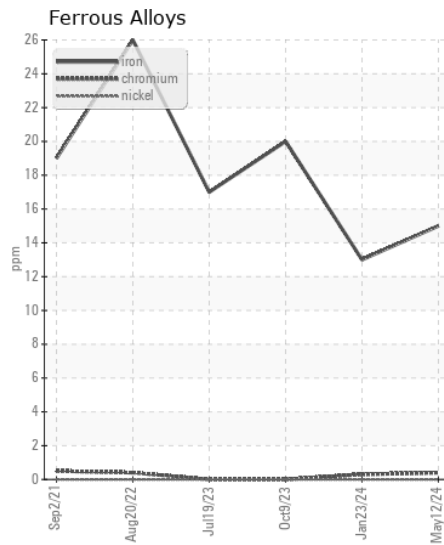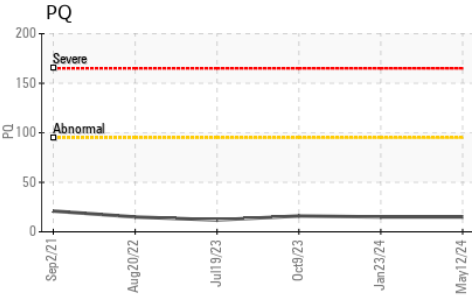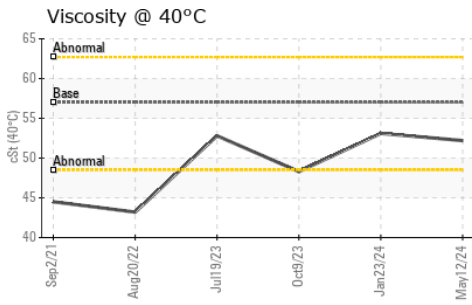

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0213308 **Received** : 13 May 2024
Lab Number : 06177409 **Tested** : 14 May 2024
Unique Number : 11023462 **Diagnosed** : 14 May 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409
 Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM
 T: (336)668-2762
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)