



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[05W46143]**

Machine Id

**JOHN DEERE 410L 1T0410LXCNF420511**

Component

**Front Axle**

Fluid

**JOHN DEERE HY-GARD HYD/TRANS (9 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0208603</b>	JR0173047	---
Sample Date		Client Info		<b>10 May 2024</b>	02 May 2023	---
Machine Age	hrs	Client Info		<b>982</b>	442	---
Oil Age	hrs	Client Info		<b>982</b>	442	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	None	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>637</b>	254	---
Iron	ppm	ASTM D5185m	>750	<b>184</b>	99	---
Chromium	ppm	ASTM D5185m	>11	<b>2</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>21	<b>5</b>	1	---
Lead	ppm	ASTM D5185m	>49	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>101	<b>71</b>	42	---
Tin	ppm	ASTM D5185m	>10	<b>2</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>MODER</b>	MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the fluid.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	<b>26</b>	14	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>MODER</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	<b>16</b>	15	---
Boron	ppm	ASTM D5185m	6	<b>112</b>	113	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>13</b>	10	---
Magnesium	ppm	ASTM D5185m	145	<b>11</b>	10	---
Calcium	ppm	ASTM D5185m	3570	<b>3518</b>	2929	---
Phosphorus	ppm	ASTM D5185m	1290	<b>1153</b>	988	---
Zinc	ppm	ASTM D5185m	1640	<b>1459</b>	1145	---
Sulfur	ppm	ASTM D5185m		<b>3874</b>	3274	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>63.3</b>	65.2	---

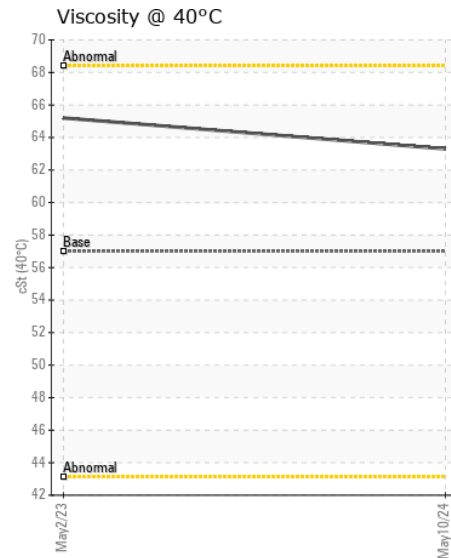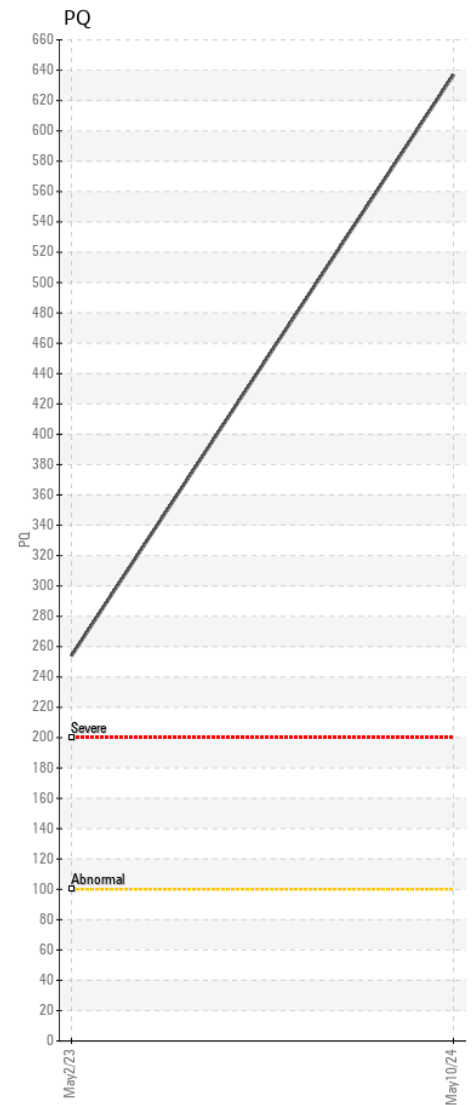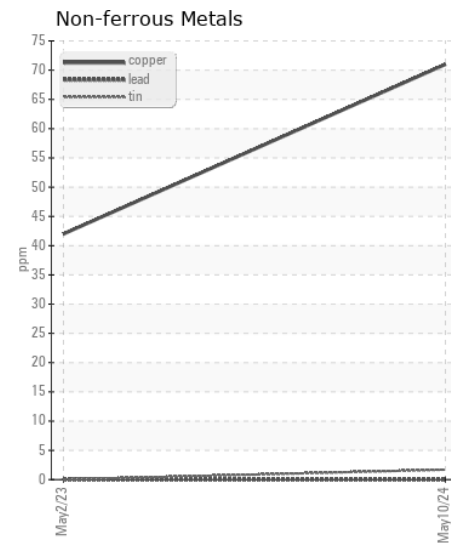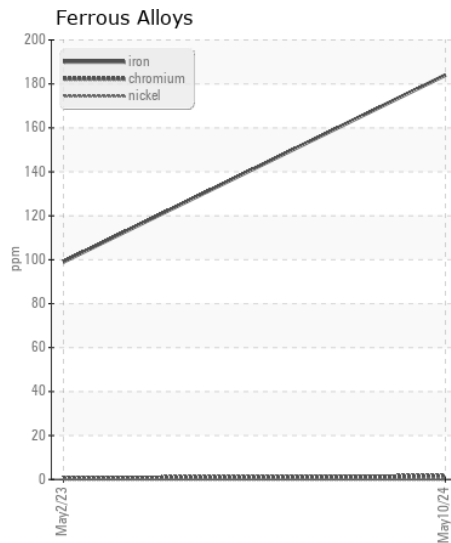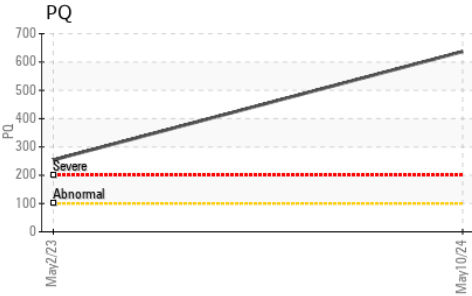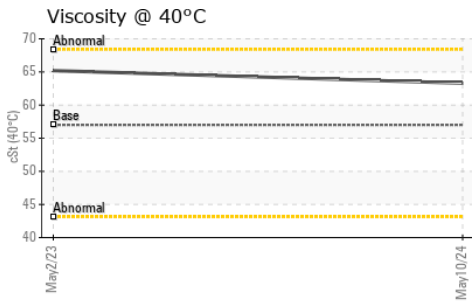

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0208603 **Received** : 13 May 2024  
**Lab Number** : 06177476 **Tested** : 14 May 2024  
**Unique Number** : 11023529 **Diagnosed** : 15 May 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - MANASSAS PARK**  
 9107 OWENS DRIVE  
 MANASSAS PARK, VA  
 US 20111

Contact: DON VEST  
 dvest@jamesriverequipment.com  
 T: (703)631-8500  
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)