



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**CHARLIE M EVERHART**  
Machine Id  
**[CHARLIE M EVERHART] 004 534782-4**  
Component  
**Port Reduction Gear**  
Fluid  
**CHEVRON URSA SUPER PLUS 40 (15 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0062858</b>	MW0062857	MW0064466
Sample Date		Client Info		<b>01 May 2024</b>	01 Apr 2024	01 Mar 2024
Machine Age	hrs	Client Info		<b>35178</b>	34460	33711
Oil Age	hrs	Client Info		<b>119</b>	1405	596
Filter Age	hrs	Client Info		<b>119</b>	1405	596
Oil Changed		Client Info		<b>Not Changd</b>	N/A	Changed
Filter Changed		Client Info		<b>Not Changd</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>2</b>	4	<1
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	1
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	1	<1
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>4</b>	7	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	<1	2
Boron	ppm	ASTM D5185m		<b>369</b>	582	282
Barium	ppm	ASTM D5185m		<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m		<b>36</b>	56	35
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>32</b>	60	44
Calcium	ppm	ASTM D5185m		<b>2381</b>	3641	2280
Phosphorus	ppm	ASTM D5185m	1000	<b>706</b>	1068	673
Zinc	ppm	ASTM D5185m	1090	<b>782</b>	1203	755
Sulfur	ppm	ASTM D5185m		<b>3176</b>	4767	3092
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>1.33</b>	1.752	1.10
Visc @ 40°C	cSt	ASTM D445	143	<b>131</b>	131	131

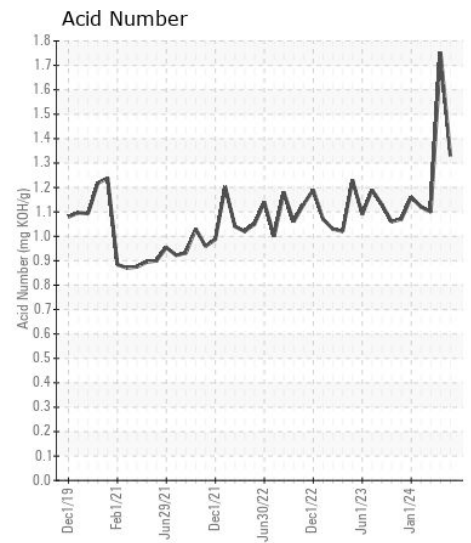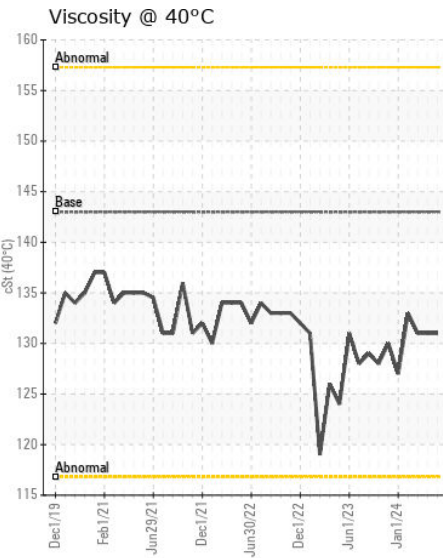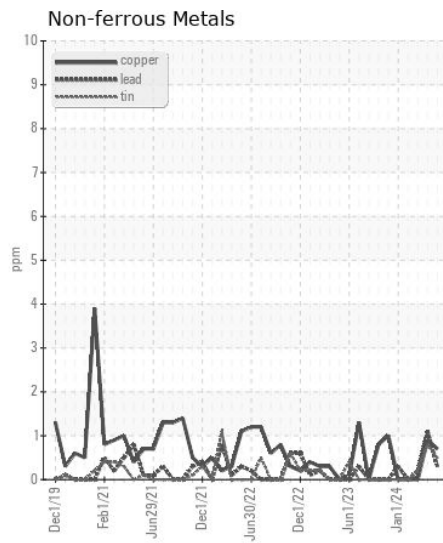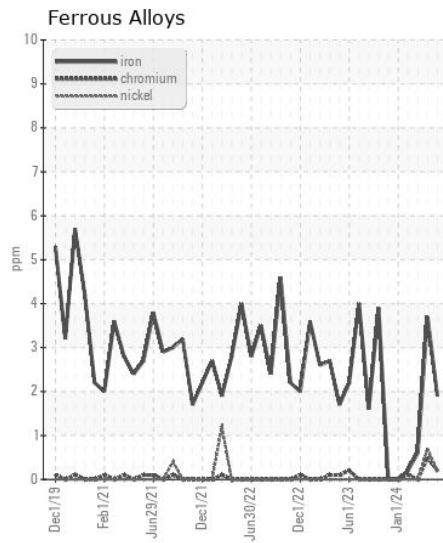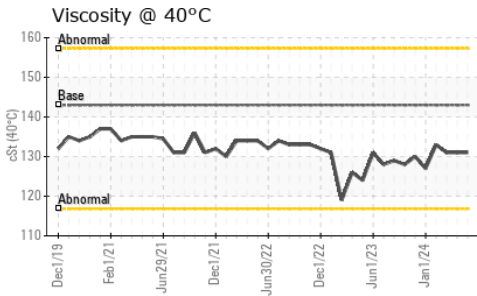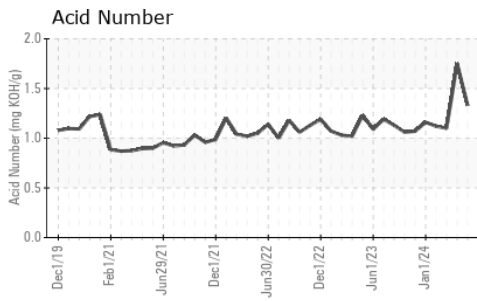

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0062858

**Lab Number** : 06177832

**Unique Number** : 11029158

**Test Package** : MAR 2

**Received** : 13 May 2024

**Tested** : 14 May 2024

**Diagnosed** : 14 May 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: JAMES ADAIR

james.adair@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)