



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / RVM-BUTTERFIELD [68553]
Machine Id
WL081
Component
Transmission (Manual)
Fluid
PETRO CANADA PRODURO TO-4 SAE 30 (--- GAL)

RECOMMENDATION

(Customer Sample Comment: PM-1 sampled fluid)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0108659	PCA0087073	PCA0085778
Sample Date		Client Info		07 May 2024	08 Nov 2023	01 Jun 2023
Machine Age	hrs	Client Info		42798	42315	41808
Oil Age	hrs	Client Info		42798	42318	41808
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	N/A
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR










Iron	ppm	ASTM D5185m	>200	0	<1	3
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>7	1	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	2
Lead	ppm	ASTM D5185m	>45	0	0	<1
Copper	ppm	ASTM D5185m	>225	3	3	3
Tin	ppm	ASTM D5185m	>10	<1	0	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Silicon	ppm	ASTM D5185m	>125	6	4	4
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

Sodium	ppm	ASTM D5185m		<1	<1	1
Boron	ppm	ASTM D5185m	2	<1	2	3
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	2
Manganese	ppm	ASTM D5185m	9	<1	0	<1
Magnesium	ppm	ASTM D5185m	1	26	14	18
Calcium	ppm	ASTM D5185m	3131	3514	3122	2822
Phosphorus	ppm	ASTM D5185m	1194	963	949	902
Zinc	ppm	ASTM D5185m	1281	1127	1129	1098
Sulfur	ppm	ASTM D5185m	3811	4020	3808	4890
Visc @ 40°C	cSt	ASTM D445	88.5	92.7	97.2	93.9

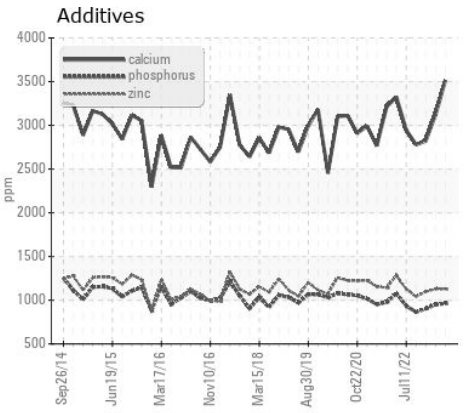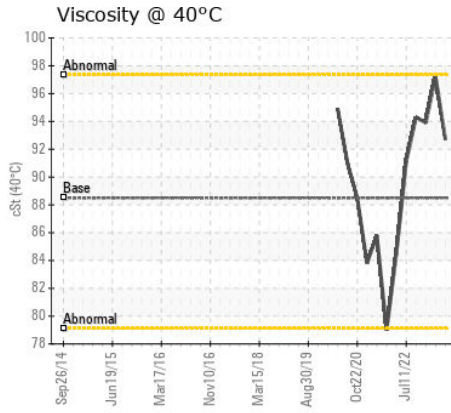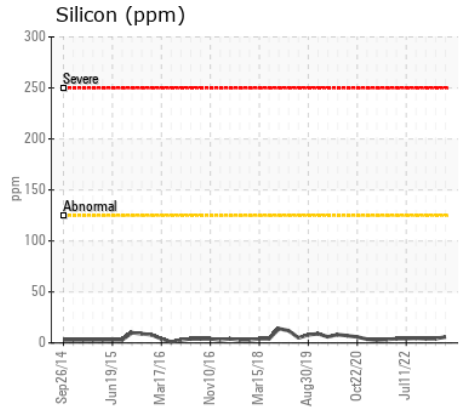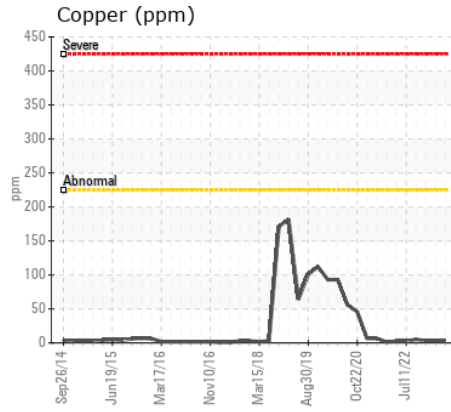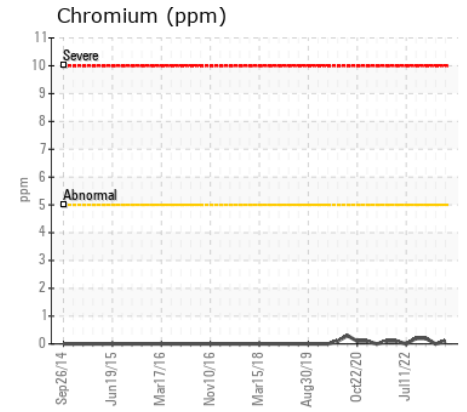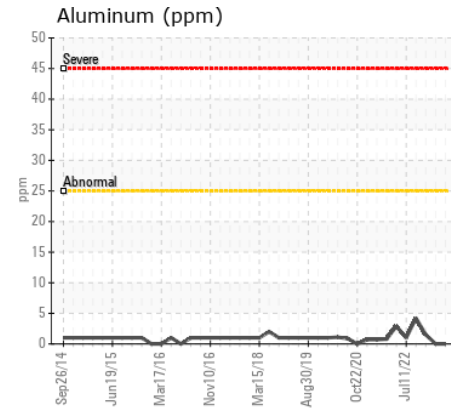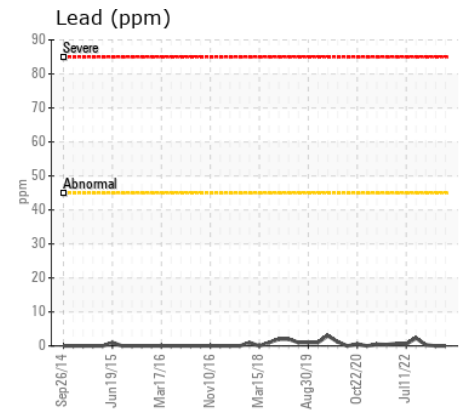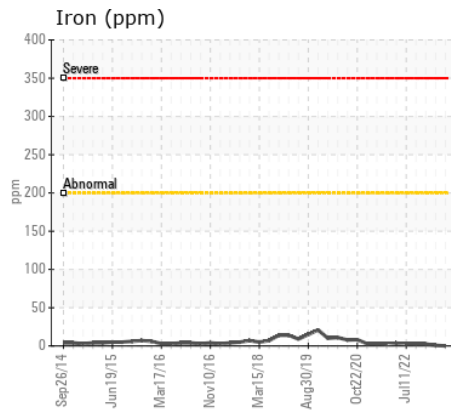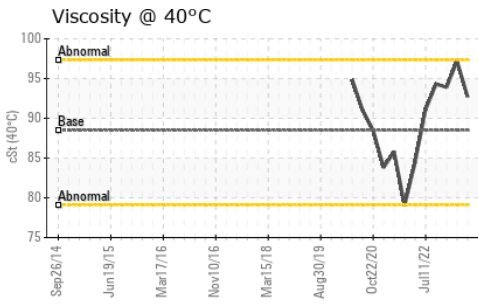

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : PCA0108659
 Lab Number : 06178004
 Unique Number : 11029330
 Test Package : MOB 1

Kemp Quarries - RVM-Butterfield
 8651 Farm Rd 2115
 Purdy, MO
 US 65734
 Contact: LEE DUCHANOIS
 lduchanois@kempquarries.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: