



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KIOTI DK4720 177409 (S/N PA4WA0518)
 Component
Diesel Engine
 Fluid
KIOTI (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KT0001264	---	---
Sample Date		Client Info		09 May 2024	---	---
Machine Age	hrs	Client Info		116	---	---
Oil Age	hrs	Client Info		116	---	---
Filter Age	hrs	Client Info		116	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	24	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	5	---	---
Lead	ppm	ASTM D5185m	>40	17	---	---
Copper	ppm	ASTM D5185m	>330	39	---	---
Tin	ppm	ASTM D5185m	>15	2	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	21	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel	%	ASTM D3524	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		11	---	---
Boron	ppm	ASTM D5185m		86	---	---
Barium	ppm	ASTM D5185m		6	---	---
Molybdenum	ppm	ASTM D5185m		100	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		655	---	---
Calcium	ppm	ASTM D5185m		2308	---	---
Phosphorus	ppm	ASTM D5185m		1507	---	---
Zinc	ppm	ASTM D5185m		1770	---	---
Sulfur	ppm	ASTM D5185m		5939	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.6	---	---
Visc @ 100°C	cSt	ASTM D445		12.3	---	---

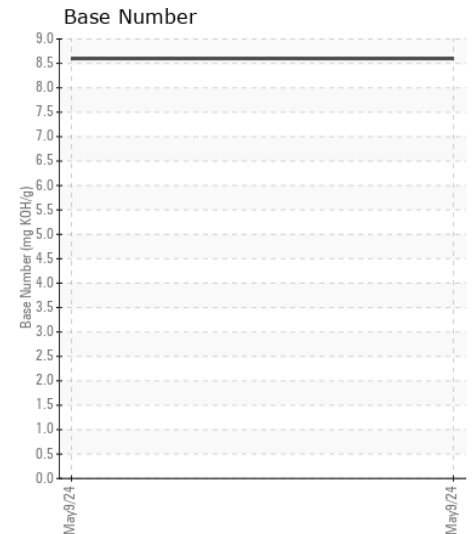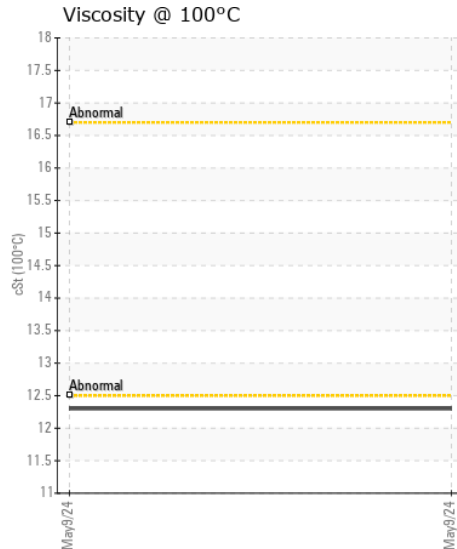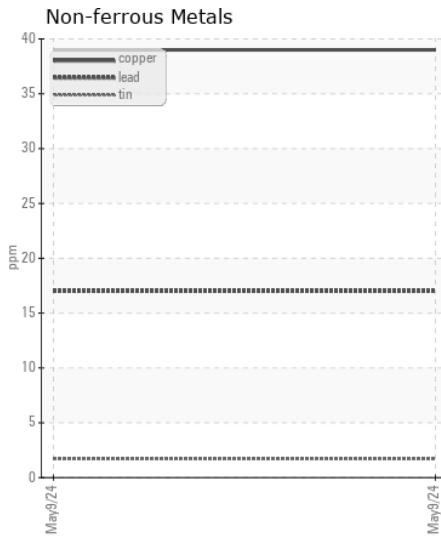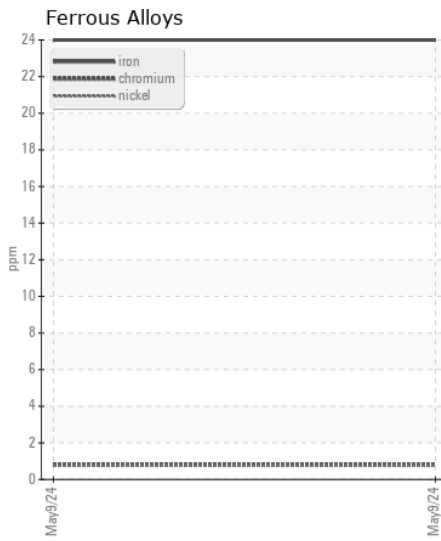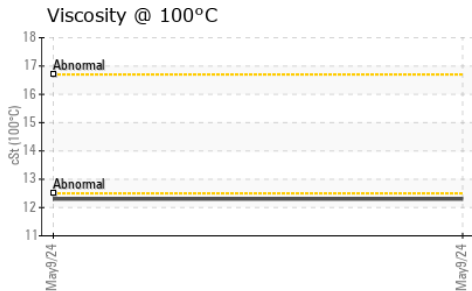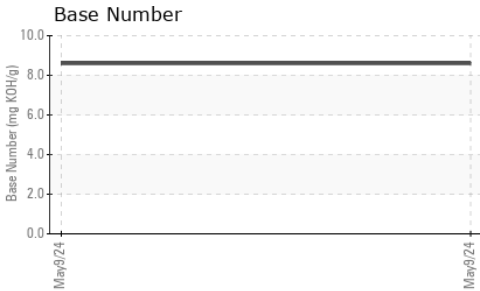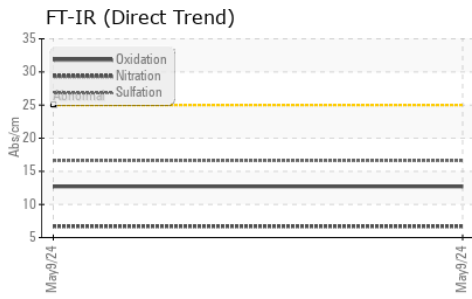

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KT0001264 **Received** : 13 May 2024
Lab Number : 06178205 **Tested** : 14 May 2024
Unique Number : 11029531 **Diagnosed** : 15 May 2024 - Sean Felton
Test Package : CONST (Additional Tests: FuelDilution, TBN)

S & H FARM SUPPLY
 7 ROUTE A
 LOCKWOOD, MO
 US 65682
 Contact: KEVIN RILEY
 kevin.riley@shfarmersupply.com
 T: (417)232-4700
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)