



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**NEIL N DIEHL**

Machine Id

**[NEIL N DIEHL] 007 639030-7**

Component

**Port Genset**

Fluid

**CHEVRON DELO 400 XLE 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0068640</b>	MW06116482	MW0065831
Sample Date		Client Info		<b>06 Apr 2024</b>	04 Mar 2024	02 Feb 2024
Machine Age	hrs	Client Info		<b>4943</b>	4549	4129
Oil Age	hrs	Client Info		<b>370</b>	4549	396
Filter Age	hrs	Client Info		<b>370</b>	0	396
Oil Changed		Client Info		<b>Changed</b>	N/A	Changed
Filter Changed		Client Info		<b>Changed</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>7</b>	<1	6
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>12	<b>3</b>	3	3
Lead	ppm	ASTM D5185m	>17	<b>0</b>	0	3
Copper	ppm	ASTM D5185m	>70	<b>48</b>	57	23
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>5</b>	6	7
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.2</b>	7.8	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.0</b>	22.7	22.5
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Boron	ppm	ASTM D5185m		<b>345</b>	382	303
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>121</b>	132	117
Manganese	ppm	ASTM D5185m		<b>1</b>	2	2
Magnesium	ppm	ASTM D5185m		<b>598</b>	667	696
Calcium	ppm	ASTM D5185m		<b>1519</b>	1713	1683
Phosphorus	ppm	ASTM D5185m	760	<b>712</b>	701	707
Zinc	ppm	ASTM D5185m	830	<b>819</b>	836	829
Sulfur	ppm	ASTM D5185m	2770	<b>2790</b>	2835	2740
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.0</b>	17.9	17.1
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	<b>8.8</b>	8.9	8.7
Visc @ 100°C	cSt	ASTM D445	14.9	<b>12.0</b>	11.8	12.2


**FT-IR (Direct Trend)**

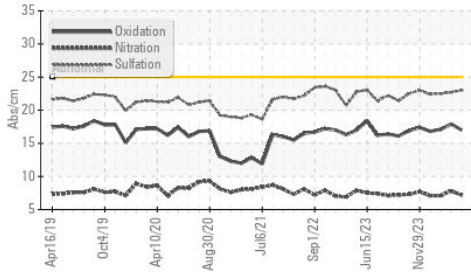


**Ferrous Alloys**

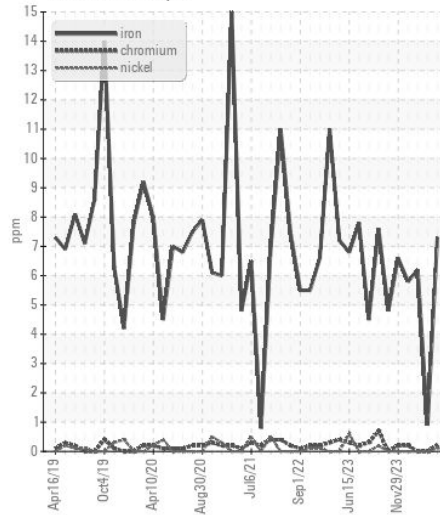


**Base Number**

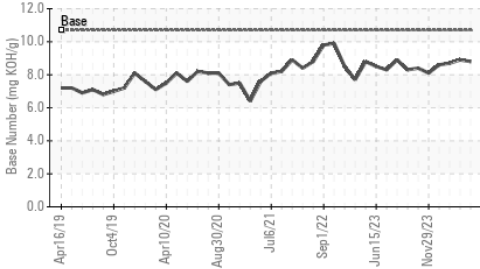


**Viscosity @ 100°C**

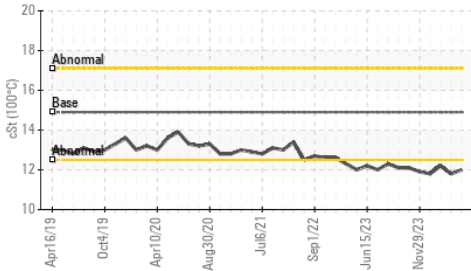


**Non-ferrous Metals**

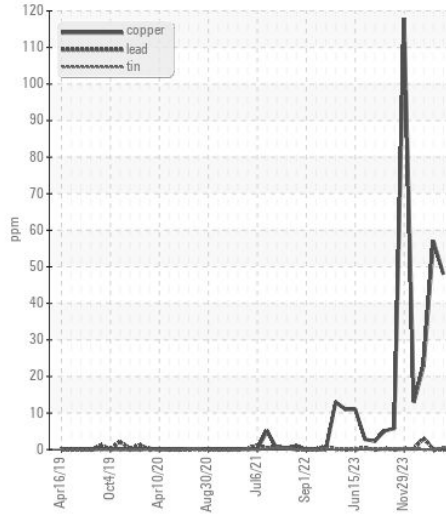

**Viscosity @ 100°C**

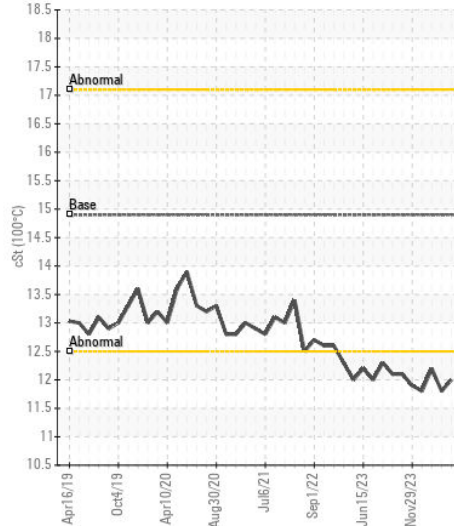

**Base Number**

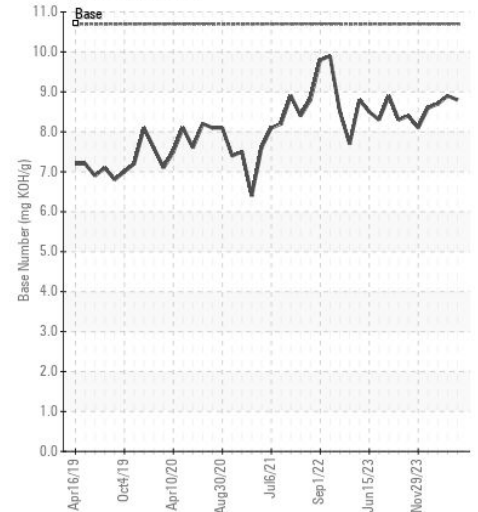

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0068640  
**Lab Number** : 06178576  
**Unique Number** : 11029902  
**Test Package** : MAR 2  
**Received** : 14 May 2024  
**Tested** : 15 May 2024  
**Diagnosed** : 15 May 2024 - Wes Davis

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003

Contact: ALLEN WILLHELM  
 allen.willhelm@ingrambarga.com  
 T: (270)415-4467  
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)