



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
ATLAS COPCO DM45E 8285
Component
Diesel Engine
Fluid
SHELL Rotella T5 15W-40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0213036	---	---
Sample Date		Client Info		07 May 2024	---	---
Machine Age	hrs	Client Info		3624	---	---
Oil Age	hrs	Client Info		405	---	---
Filter Age	hrs	Client Info		405	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	30	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	4	---	---
Lead	ppm	ASTM D5185m	>40	4	---	---
Copper	ppm	ASTM D5185m	>330	2	---	---
Tin	ppm	ASTM D5185m	>15	2	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	9	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		84	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		19	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		196	---	---
Calcium	ppm	ASTM D5185m		2063	---	---
Phosphorus	ppm	ASTM D5185m		1018	---	---
Zinc	ppm	ASTM D5185m		1195	---	---
Sulfur	ppm	ASTM D5185m		3613	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	7.4	---	---
Visc @ 100°C	cSt	ASTM D445	14.9	14.6	---	---

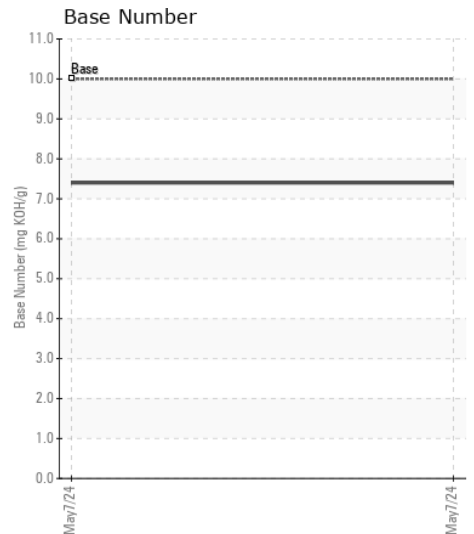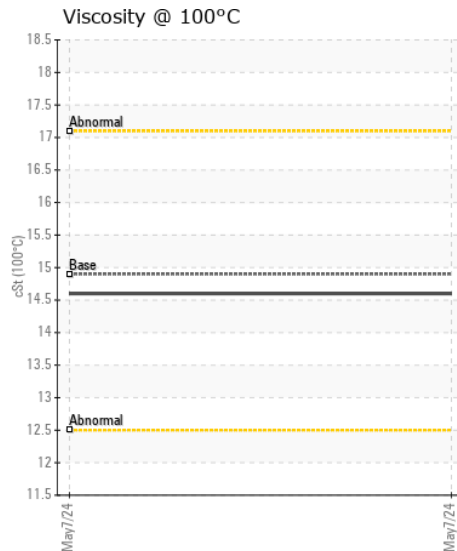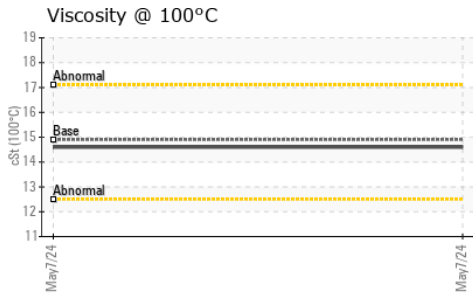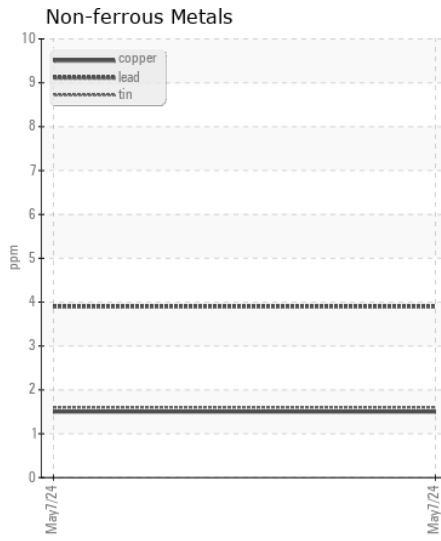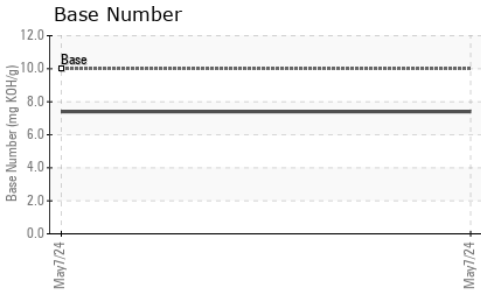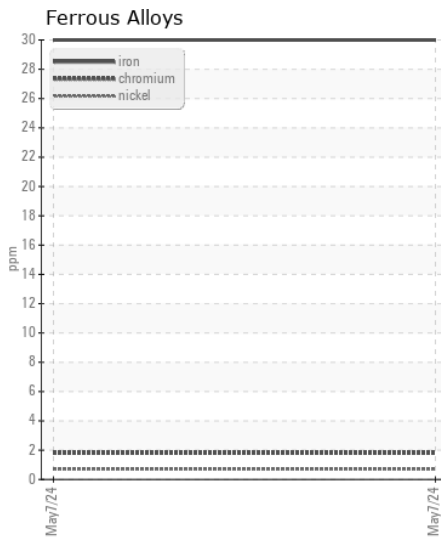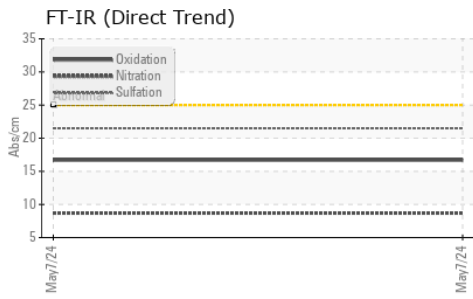

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0213036 **Received** : 21 May 2024
Lab Number : 06185959 **Tested** : 22 May 2024
Unique Number : 11042711 **Diagnosed** : 22 May 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

VIRGINIA DRILLING
 1793 DRY FORD RD
 VANSANT, VA
 US 24656

Contact: SCOTTIE ROOP
SCOTTIE.ROOP@VADRILLCO.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: