



ASCENDUM

OIL ANALYSIS REPORT



Area

Ascendum Machinery/500 Hour CSA

Machine Id

VOLVO L150H 2328 (S/N L150HV7200)

Component

Transmission (Auto)

Fluid

DEXRON III (--- GAL)

WEAR
CONTAMINATION
FLUID CONDITION

NORMAL

NORMAL

NORMAL

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011421	ASC0008952	VCP414044
Sample Date		Client Info		17 May 2024	31 Jan 2024	06 Oct 2023
Machine Age	hrs	Client Info		4104	3550	2070
Oil Age	hrs	Client Info		4103	1550	0
Filter Age	hrs	Client Info		4103	1550	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>300	128	158	81
Chromium	ppm	ASTM D5185m	>3	<1	<1	<1
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>5	<1	2	<1
Lead	ppm	ASTM D5185m	>3	0	0	0
Copper	ppm	ASTM D5185m	>25	14	15	10
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	12	12	11
Potassium	ppm	ASTM D5185m	>20	<1	3	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	0	5
Boron	ppm	ASTM D5185m		66	69	74
Barium	ppm	ASTM D5185m		5	11	2
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		4	5	4
Magnesium	ppm	ASTM D5185m		0	<1	1
Calcium	ppm	ASTM D5185m		84	73	74
Phosphorus	ppm	ASTM D5185m		182	176	190
Zinc	ppm	ASTM D5185m		17	5	10
Sulfur	ppm	ASTM D5185m		1943	1776	1838
Visc @ 40°C	cSt	ASTM D445	35.0	27.0	27.1	27.3

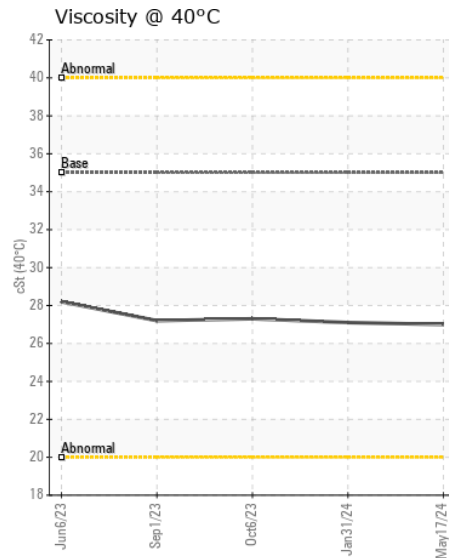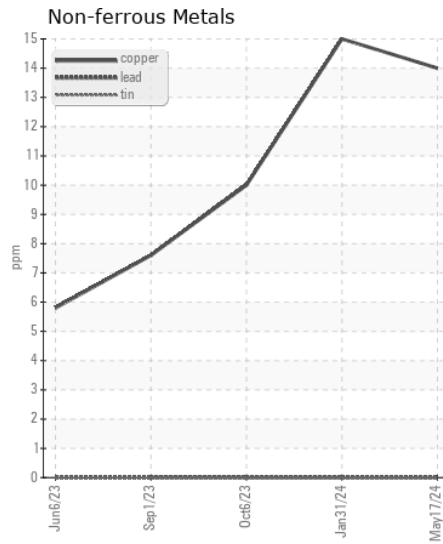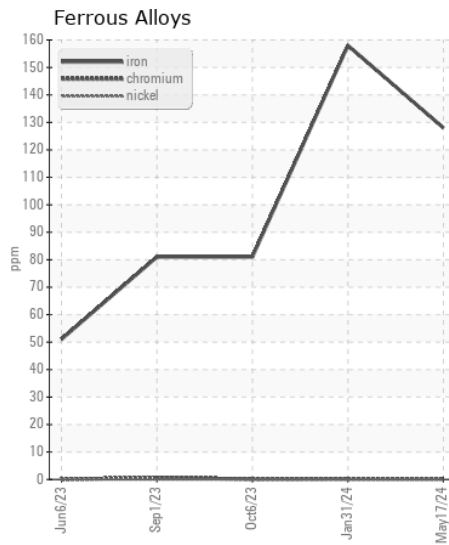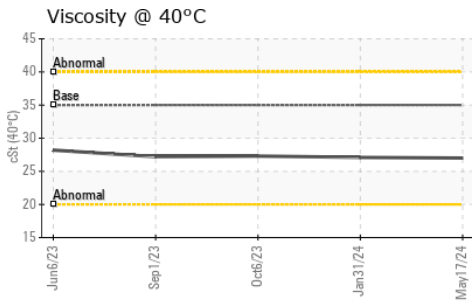

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ASC0011421

Lab Number : 06186596

Unique Number : 11043348

Test Package : CONST

Received : 21 May 2024

Tested : 22 May 2024

Diagnosed : 22 May 2024 - Wes Davis

G S MATERIALS INC

PO BOX 1335

BURLINGTON, NC

US 27216

Contact: KAREN NEWPORT

Gsmaterials@windstream.net

T: (919)499-9322

F: (919)499-2097

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)