



LUBE PLUS+

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
MIXERS
Machine Id
[MIXERS] M209
Component
Diesel Engine
Fluid
KENDALL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LP0001553	LP0000671	LP0000103
Sample Date		Client Info		15 May 2024	16 Nov 2023	31 Jul 2023
Machine Age	hrs	Client Info		12885	12397	11831
Oil Age	hrs	Client Info		600	600	600
Filter Age	hrs	Client Info		600	600	600
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	11	13	11
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		1	1	2
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	2	2
Lead	ppm	ASTM D5185m	>40	6	14	15
Copper	ppm	ASTM D5185m	>330	<1	2	2
Tin	ppm	ASTM D5185m	>15	1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	16	▲ 25	▲ 47
Potassium	ppm	ASTM D5185m	>20	<1	0	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.5	0.5
Nitration	Abs/cm	*ASTM D7624	>20	11.1	12.0	11.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.0	25.3	23.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	10	16
Boron	ppm	ASTM D5185m	6.3	52	34	30
Barium	ppm	ASTM D5185m	0.6	0	0	0
Molybdenum	ppm	ASTM D5185m	0.4	93	91	85
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	277	126	184	307
Calcium	ppm	ASTM D5185m	1514	2278	2179	2066
Phosphorus	ppm	ASTM D5185m	634	1077	1053	1042
Zinc	ppm	ASTM D5185m	743	1316	1369	1335
Sulfur	ppm	ASTM D5185m	2592	4142	3621	4045
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.1	21.4	19.8
Base Number (BN)	mg KOH/g	ASTM D2896		4.8	7.54	7.08
Visc @ 100°C	cSt	ASTM D445		13.7	13.7	13.6

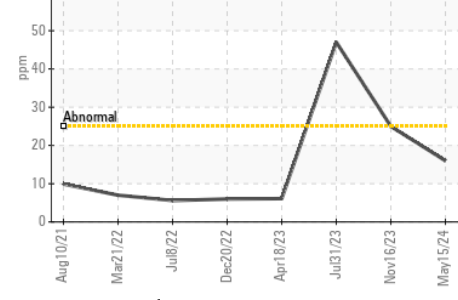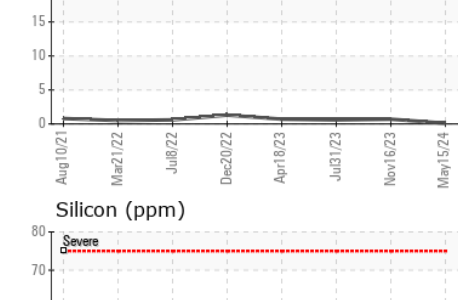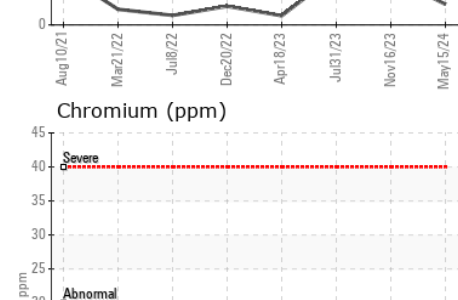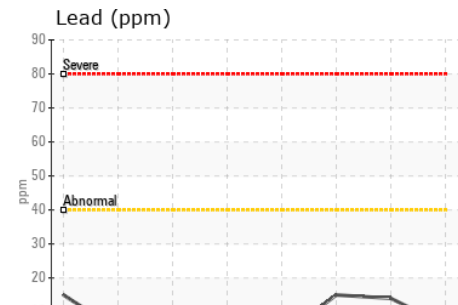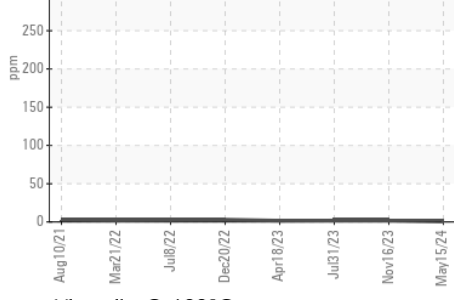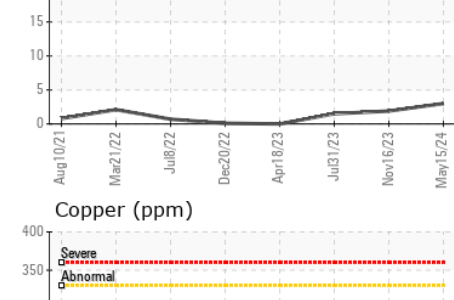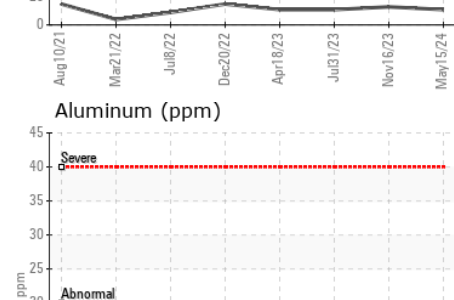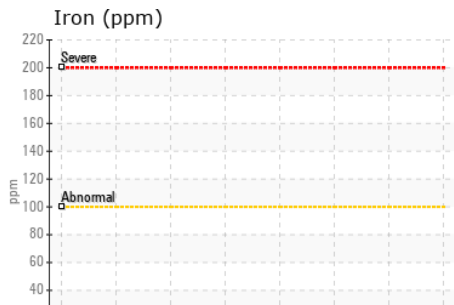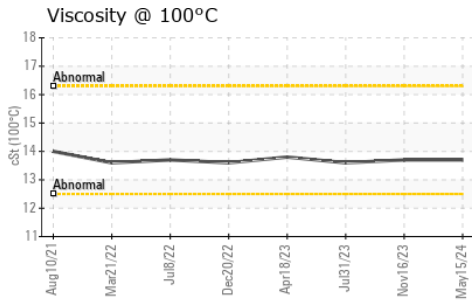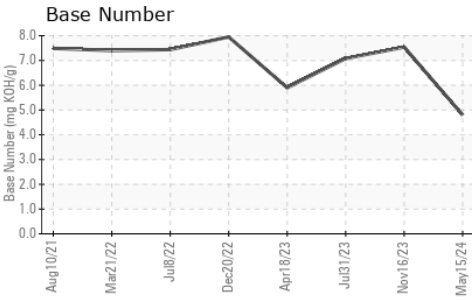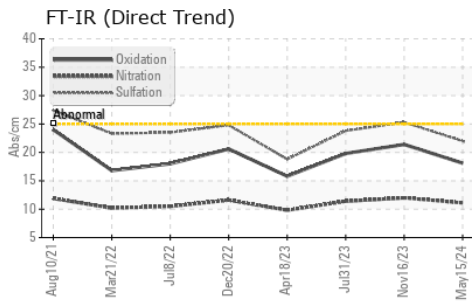

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LP0001553
Lab Number : 06187021
Unique Number : 11043773
Test Package : MOB 2
Received : 21 May 2024
Tested : 23 May 2024
Diagnosed : 23 May 2024 - Wes Davis

CONSTRUCTION SERVICES
 2420 BOSTON RD
 WILBRAHAM, MA
 US 01095
 Contact: Michael Dupuis
 mdupuis@cs-ma.us
 T: (413)733-6331
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)