



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
SWEET SPOT
Machine Id
2461056 - INBOARD
Component
Port Gearbox
Fluid
FLAMINGO 30WT (3 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA051626	---	---
Sample Date		Client Info		16 May 2024	---	---
Machine Age	hrs	Client Info		798	---	---
Oil Age	hrs	Client Info		798	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		153	---	---
Iron	ppm	ASTM D5185m	>200	177	---	---
Chromium	ppm	ASTM D5185m	>10	3	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	21	---	---
Lead	ppm	ASTM D5185m	>50	10	---	---
Copper	ppm	ASTM D5185m	>200	40	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	7	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		1	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		5	---	---
Calcium	ppm	ASTM D5185m		2670	---	---
Phosphorus	ppm	ASTM D5185m		776	---	---
Zinc	ppm	ASTM D5185m		862	---	---
Sulfur	ppm	ASTM D5185m		4410	---	---
Visc @ 40°C	cSt	ASTM D445		88.8	---	---

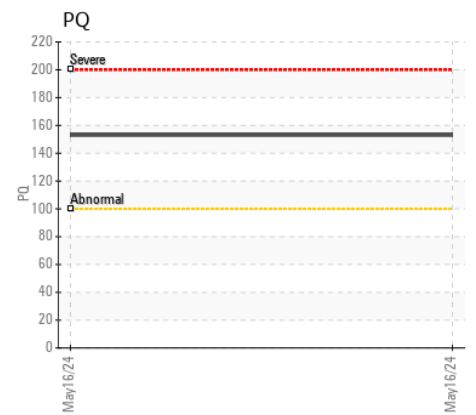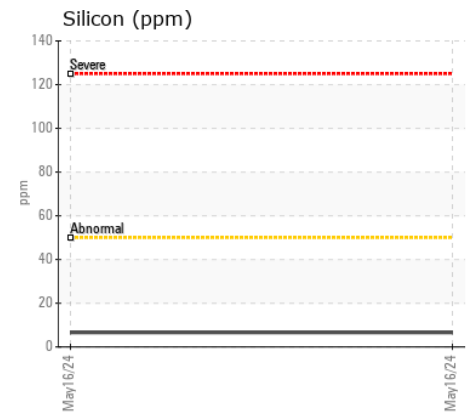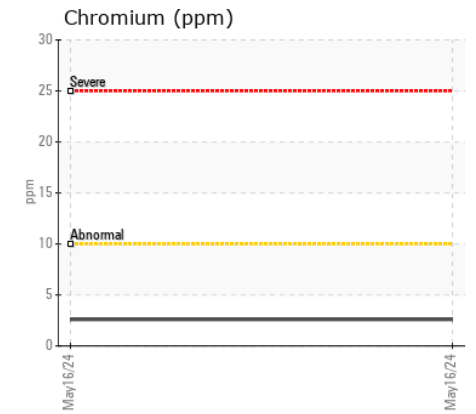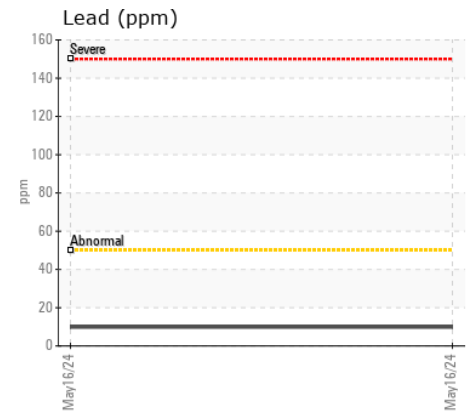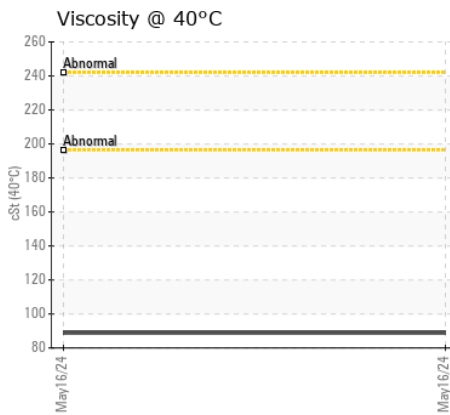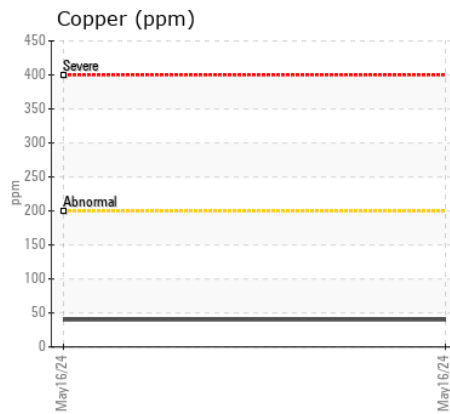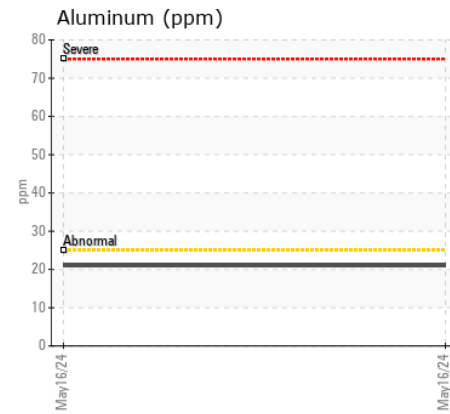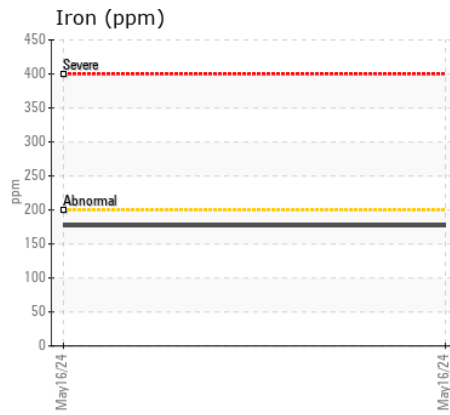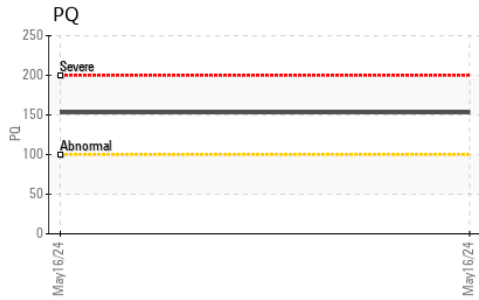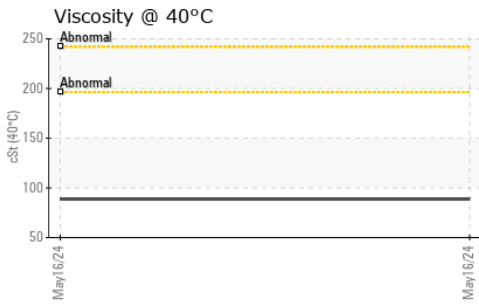

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : VPA051626 Received : 22 May 2024
 Lab Number : 06187998 Tested : 24 May 2024
 Unique Number : 11044750 Diagnosed : 24 May 2024 - Sean Felton
 Test Package : MOB 1 (Additional Tests: PQ)

MMRS - MOBILE MARINE KEY WEST
 5680 1ST AVE, UNIT 4
 KEY WEST, FL
 US 33040
 Contact: Matt Graf

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: