



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1709
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0932767	WC0870683	WC0792879
Sample Date		Client Info		07 May 2024	21 Dec 2023	28 Mar 2023
Machine Age	mls	Client Info		0	99484	84163
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	16	22	66
Chromium	ppm	ASTM D5185m	>20	1	<1	2
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	9	10	16
Lead	ppm	ASTM D5185m	>40	<1	0	0
Copper	ppm	ASTM D5185m	>330	1	1	28
Tin	ppm	ASTM D5185m	>15	1	0	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	7	25
Potassium	ppm	ASTM D5185m	>20	4	4	36
Fuel		WC Method	>5	<1.0	<1.0	1.4
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.7	0.2
Nitration	Abs/cm	*ASTM D7624	>20	10.4	11.1	9.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	22.7	20.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	2	2	7
Boron	ppm	ASTM D5185m	250	35	19	49
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	92	79	50
Manganese	ppm	ASTM D5185m		<1	<1	6
Magnesium	ppm	ASTM D5185m	450	92	163	764
Calcium	ppm	ASTM D5185m	3000	2206	1975	1396
Phosphorus	ppm	ASTM D5185m	1150	1122	987	752
Zinc	ppm	ASTM D5185m	1350	1282	1174	951
Sulfur	ppm	ASTM D5185m	4250	4026	3325	2814
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.5	19.0	18.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.9	6.0	7.4
Visc @ 100°C	cSt	ASTM D445	14.4	12.6	13.0	11.2

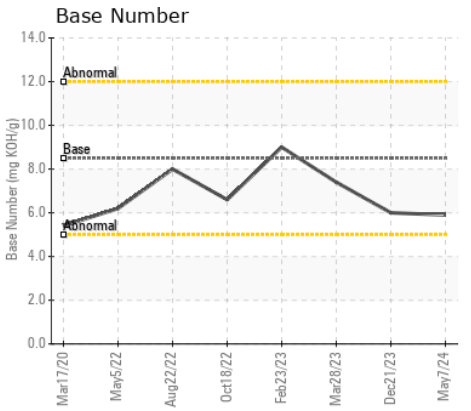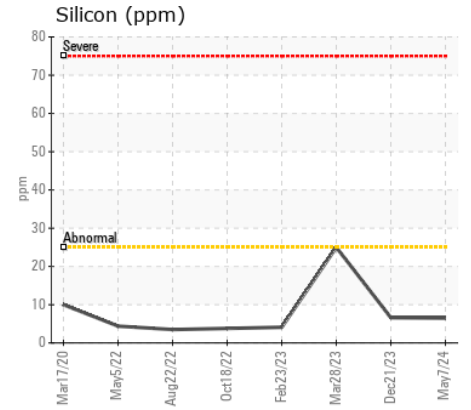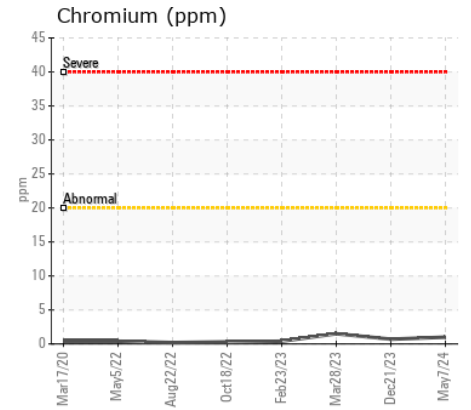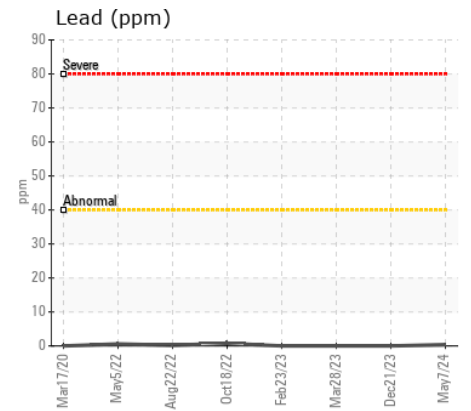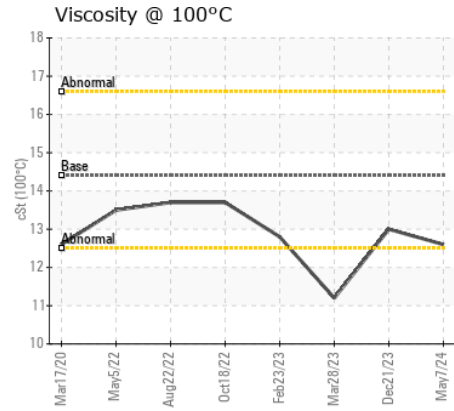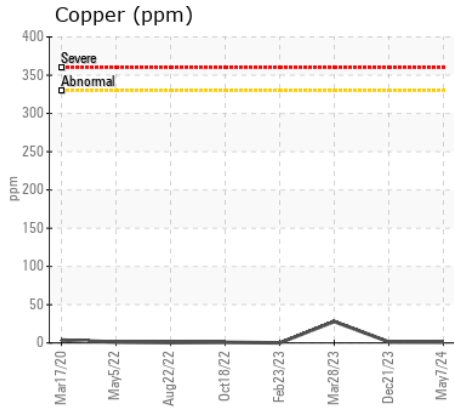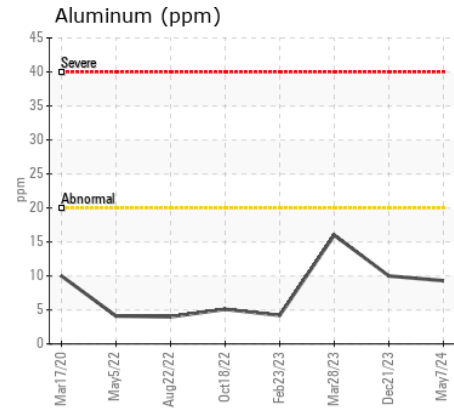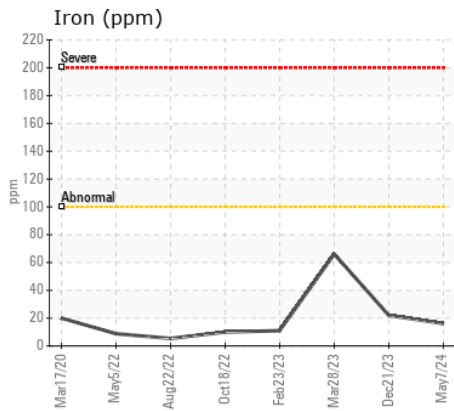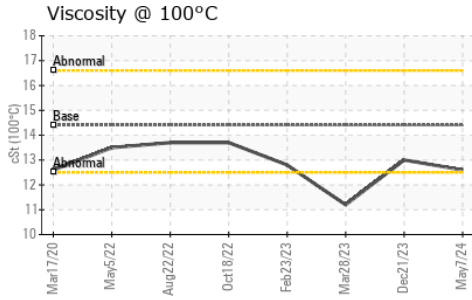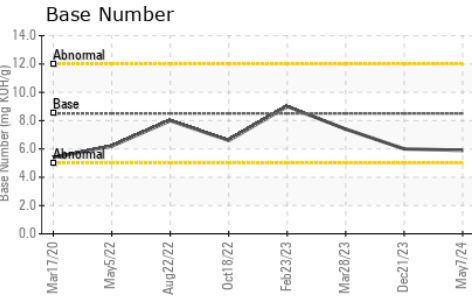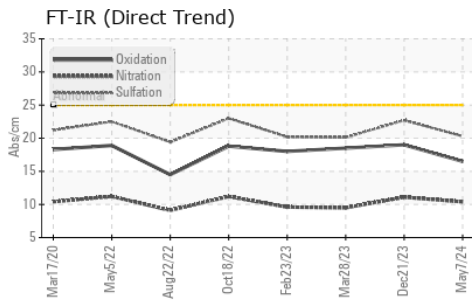

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0932767 **Received** : 23 May 2024
Lab Number : 06189053 **Tested** : 24 May 2024
Unique Number : 11045805 **Diagnosed** : 24 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

WAKE COUNTY PUBLIC SCHOOL SYSTEM
 1551 ROCK QUARRY ROAD
 RALEIGH, NC
 US 27610
 Contact: DEVIN WEBER
 dweber@wcpss.net
 T: (919)856-8076
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)