



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**PTG8515**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0936296</b>	WC0903477	WC0805997
Sample Date		Client Info		<b>19 May 2024</b>	25 Feb 2024	04 May 2023
Machine Age	mls	Client Info		<b>408600</b>	401117	0
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	N/A
Filter Changed		Client Info		<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>19</b>	25	22
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>1</b>	<1	1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	5	3
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>2</b>	2	1
Tin	ppm	ASTM D5185m	>15	<b>1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>6</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	6	1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	8.7	8.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.5</b>	23.1	22.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>1</b>	2	<1
Boron	ppm	ASTM D5185m	250	<b>327</b>	213	7
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	100	<b>90</b>	86	67
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>451</b>	558	886
Calcium	ppm	ASTM D5185m	3000	<b>1527</b>	1473	1163
Phosphorus	ppm	ASTM D5185m	1150	<b>951</b>	1039	1058
Zinc	ppm	ASTM D5185m	1350	<b>1268</b>	1294	1276
Sulfur	ppm	ASTM D5185m	4250	<b>3392</b>	3807	3545
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.6</b>	20.4	20.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.0</b>	6.4	8.6
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.8</b>	12.7	12.6


FT-IR (Direct Trend)

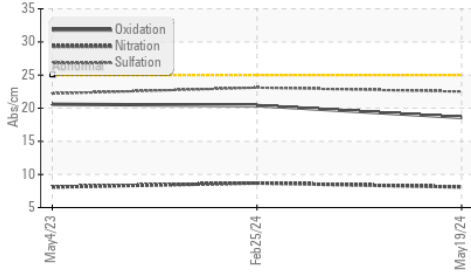


Ferrous Alloys

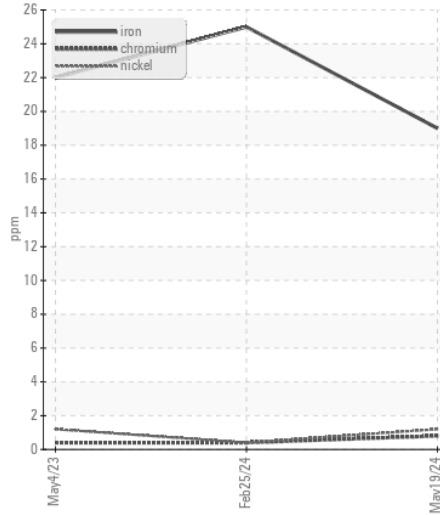


Base Number

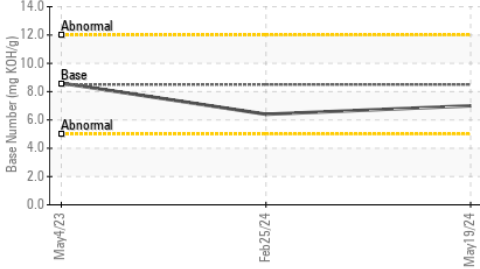


Non-ferrous Metals

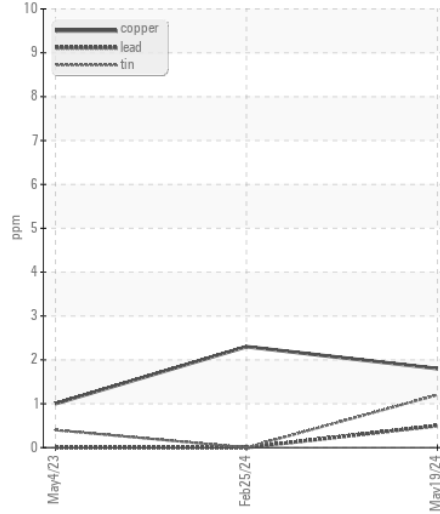


Viscosity @ 100°C

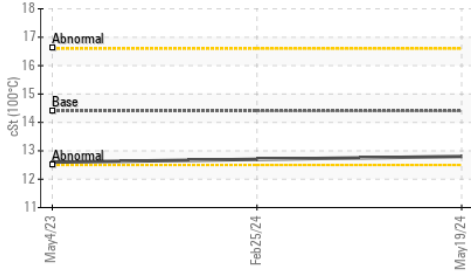

Viscosity @ 100°C

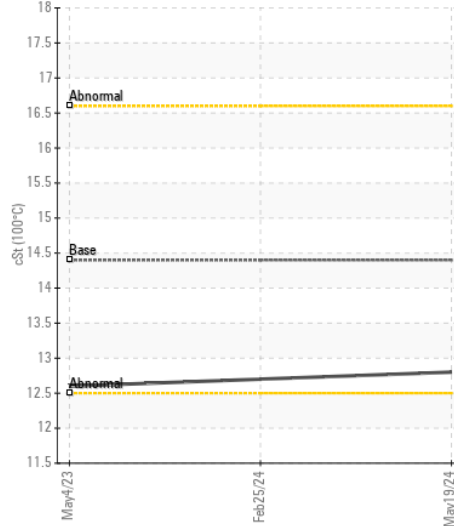

Base Number

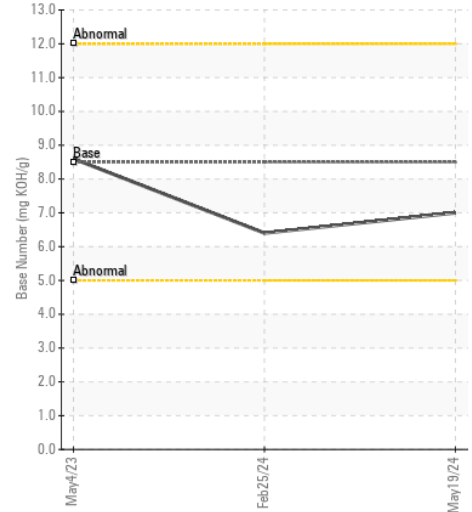

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0936296  
 Lab Number : 06190029  
 Unique Number : 11046781  
 Test Package : FLEET

Received : 23 May 2024  
 Tested : 25 May 2024  
 Diagnosed : 25 May 2024 - Wes Davis

SALEM NATIONALEASE CORPORATION  
 198 PARK PLAZA DRIVE  
 WINSTON SALEM, NC  
 US 27105

Contact: Audrey Hopkins  
 Audrey.Hopkins@salemcorp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (336)767-9642

F: x: