



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
LEYBONOL LVD 540
 Component
New (Unused) Oil
 Fluid
{not provided} (--- QTS)

RECOMMENDATION

This is a baseline read-out on the submitted sample.

WEAR

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06190860	---	---
Sample Date		Client Info		10 May 2024	---	---
Machine Age	mls	Client Info		0	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185m		4	---	---
Chromium	ppm	ASTM D5185m		0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		<1	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		<1	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION


Insufficient sample was received to conduct all the routine laboratory tests.

Silicon	ppm	ASTM D5185m		3	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method		NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---


FLUID CONDITION

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		<1	---	---
Phosphorus	ppm	ASTM D5185m		438	---	---
Zinc	ppm	ASTM D5185m		22	---	---
Sulfur	ppm	ASTM D5185m		258	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.085	---	---


Ferrous Alloys

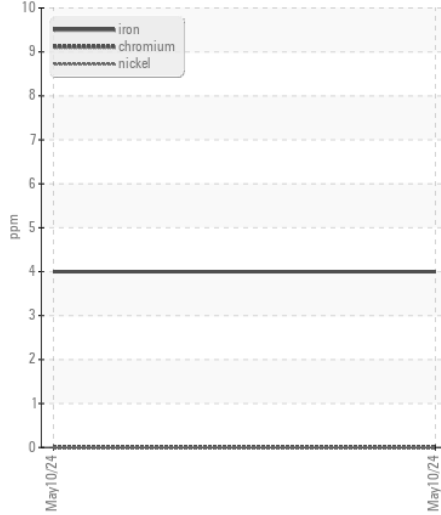


Non-ferrous Metals

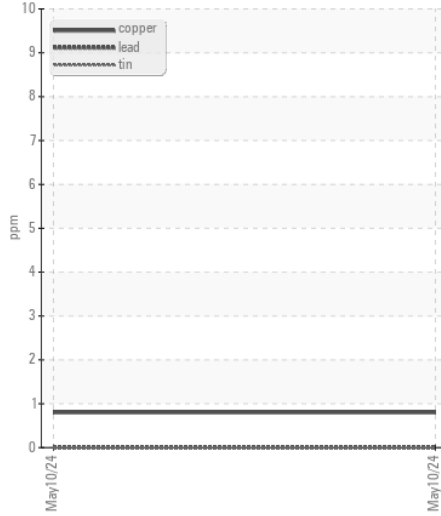


Viscosity @ 40°C

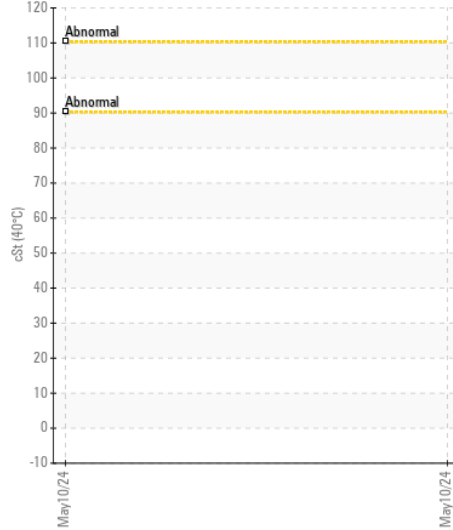


Acid Number

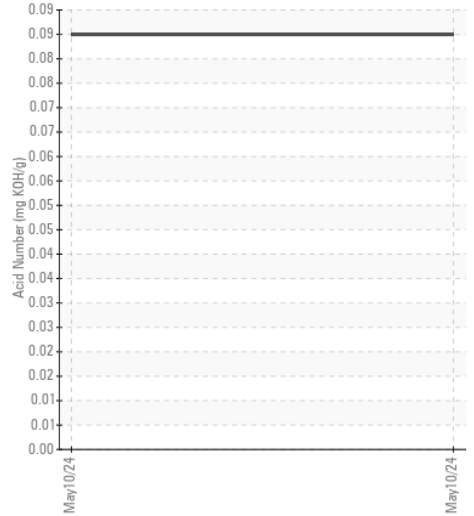


Acid Number

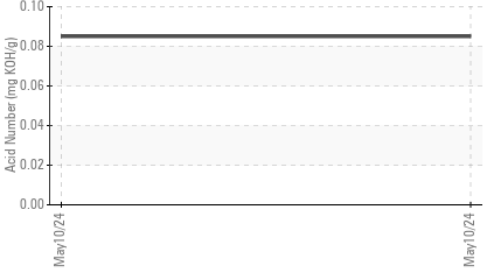

Viscosity @ 100°C

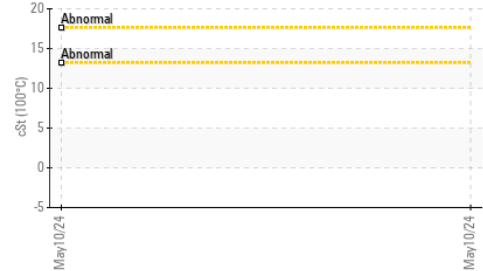

Viscosity @ 40°C

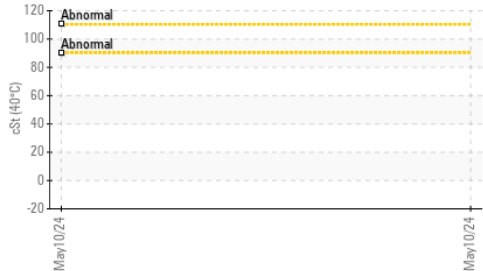

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06190860
Lab Number : 06190860
Unique Number : 11047612
Test Package : MOB 2 (Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, VI)

Received : 24 May 2024
Tested : 03 Jun 2024
Diagnosed : 03 Jun 2024 - Jonathan Hester

NORMAN MASSON
 13931 CHADROW AVE
 HAWTHORNE, CA
 US 90750

Contact: NORMAN MASSON
 nrmasson@yahoo.com

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (310)745-7085

F: x: