



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**CHESAPEAKE YACHT CENTER**

Machine Id  
**VOLVO PENTA 3200006810**

Component  
**Port IPS**

Fluid  
**{not provided} (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA058371	---	---
Sample Date		Client Info		23 May 2024	---	---
Machine Age	hrs	Client Info		37	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		15	---	---
Iron	ppm	ASTM D5185m	>200	16	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		2	---	---
Lead	ppm	ASTM D5185m		<1	---	---
Copper	ppm	ASTM D5185m		6	---	---
Tin	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		5	---	---
Potassium	ppm	ASTM D5185m	>20	8	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		619	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		1023	---	---
Calcium	ppm	ASTM D5185m		42	---	---
Phosphorus	ppm	ASTM D5185m		1631	---	---
Zinc	ppm	ASTM D5185m		17	---	---
Sulfur	ppm	ASTM D5185m		27735	---	---
Visc @ 40°C	cSt	ASTM D445		100.2	---	---

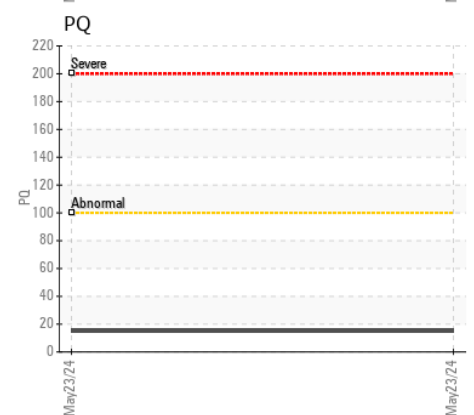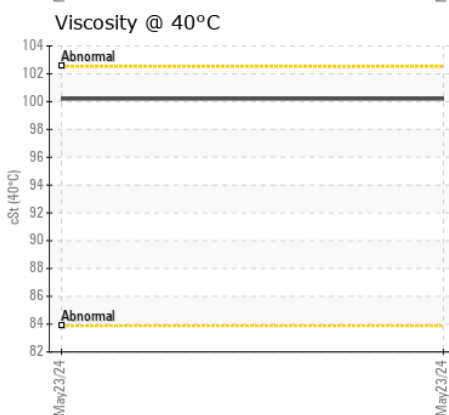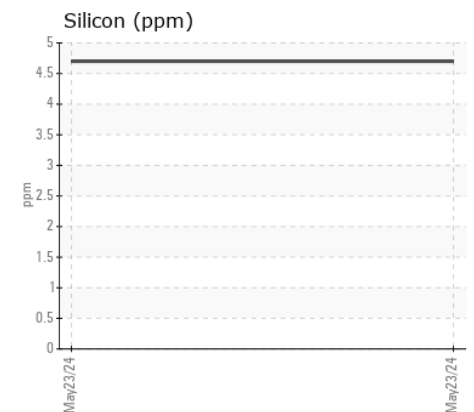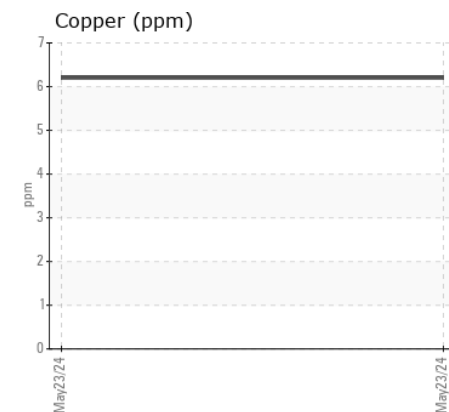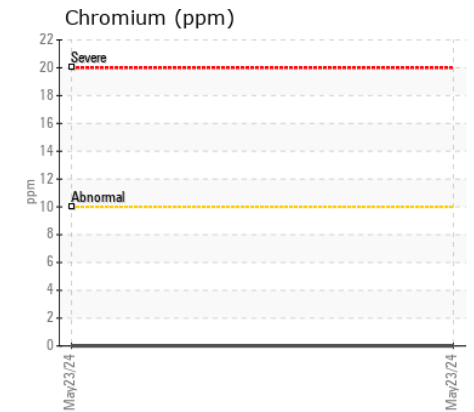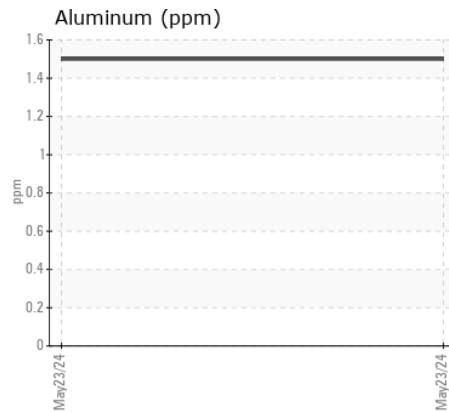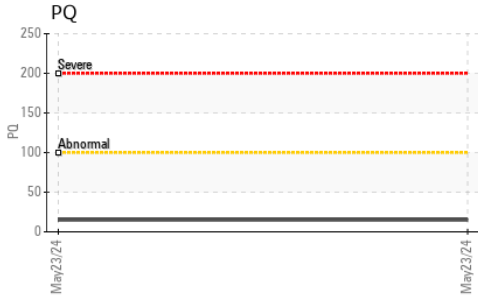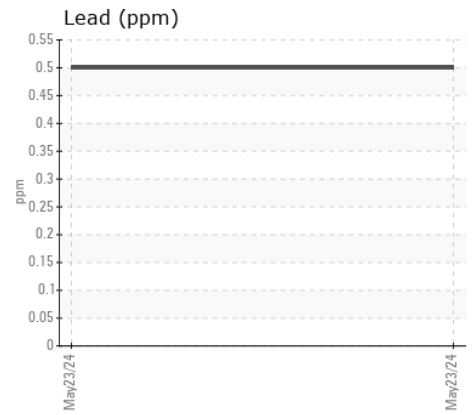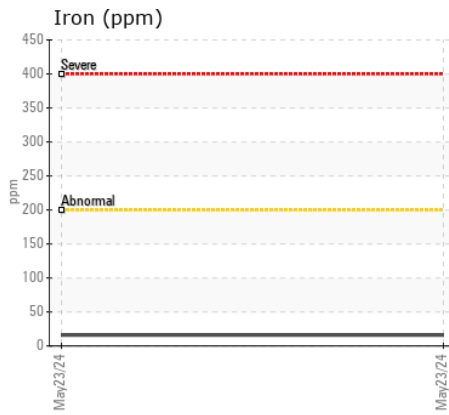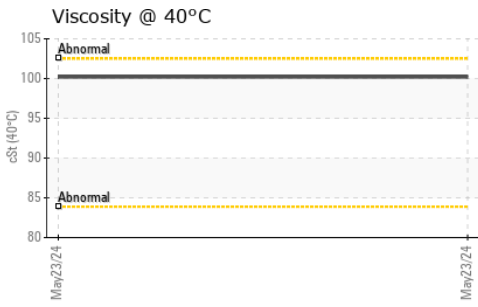

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VPA058371 **Received** : 24 May 2024  
**Lab Number** : 06190918 **Tested** : 24 May 2024  
**Unique Number** : 11047670 **Diagnosed** : 24 May 2024 - Doug Bogart  
**Test Package** : MOB 1 ( Additional Tests: PQ )

**Outstanding Marine**  
 PO Box 274  
 GALENA, MD  
 US 21635  
 Contact: Ronda Bolinger  
 rlwb@verizon.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: