



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 2 - Beaver [RO#150904]
Machine Id
KOMATSU D65 91599
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0051762	LEC0047516	---
Sample Date		Client Info		22 May 2024	01 Feb 2024	---
Machine Age	hrs	Client Info		4618	4073	---
Oil Age	hrs	Client Info		545	500	---
Filter Age	hrs	Client Info		545	500	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	12	9	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	<1	<1	---
Aluminum	ppm	ASTM D5185m	>20	2	2	---
Lead	ppm	ASTM D5185m	>40	<1	0	---
Copper	ppm	ASTM D5185m	>330	1	0	---
Tin	ppm	ASTM D5185m	>15	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	4	3	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.8	0.7	---
Nitration	Abs/cm	*ASTM D7624	>20	9.0	8.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.0	20.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	1	<1	---
Boron	ppm	ASTM D5185m	250	69	76	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	66	63	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	450	421	409	---
Calcium	ppm	ASTM D5185m	3000	1898	1709	---
Phosphorus	ppm	ASTM D5185m	1150	1097	1054	---
Zinc	ppm	ASTM D5185m	1350	1270	1281	---
Sulfur	ppm	ASTM D5185m	4250	3884	3284	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.6	17.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.1	7.9	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.7	13.3	---

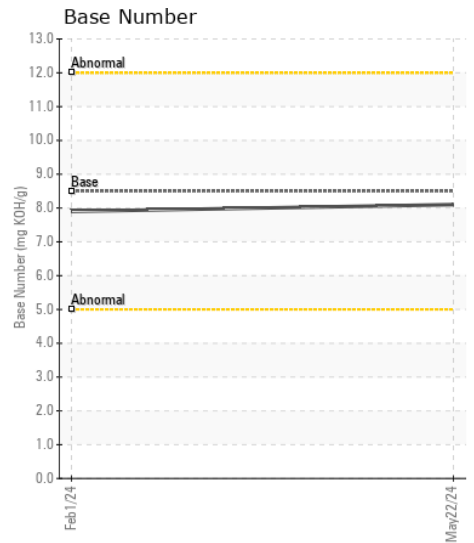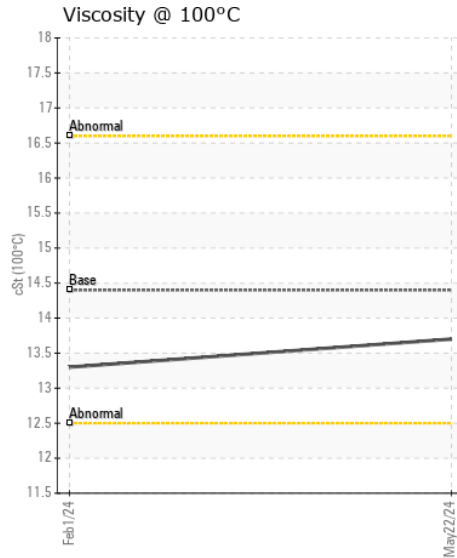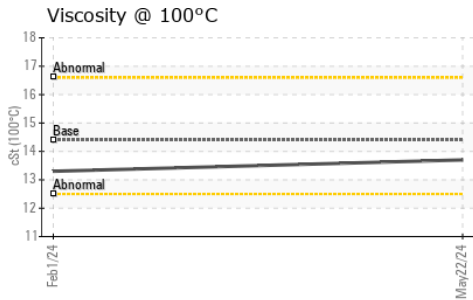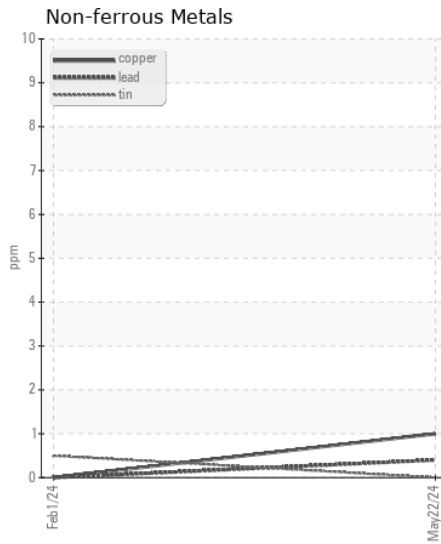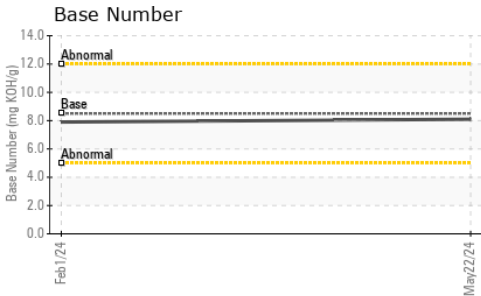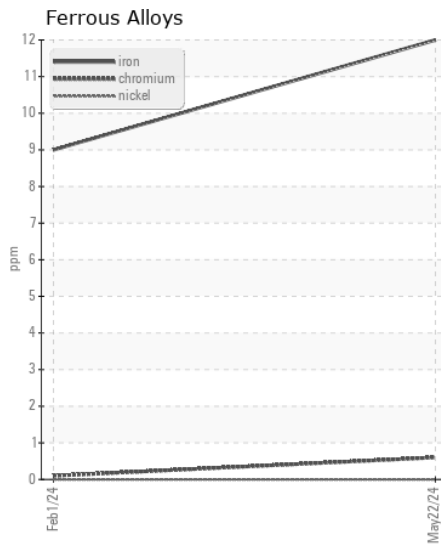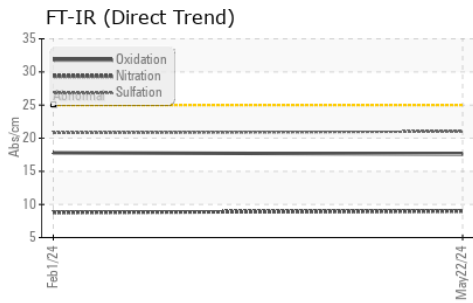

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0051762 **Received** : 24 May 2024
Lab Number : 06191415 **Tested** : 29 May 2024
Unique Number : 11048167 **Diagnosed** : 29 May 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)