



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[16W16317]

Machine Id
HITACHI 1FFDC571ELF340844

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (6 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 16W16317)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0206900	JR0196341	JR0173323
Sample Date		Client Info		24 May 2024	15 Jan 2024	31 May 2023
Machine Age	hrs	Client Info		3997	3555	2653
Oil Age	hrs	Client Info		442	1000	500
Filter Age	hrs	Client Info		442	1000	500
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	10	10	19
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	1	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	1	0	0
Aluminum	ppm	ASTM D5185m	>20	13	12	▲ 25
Lead	ppm	ASTM D5185m	>40	<1	<1	<1
Copper	ppm	ASTM D5185m	>330	2	3	17
Tin	ppm	ASTM D5185m	>15	1	<1	2
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	8	7	10
Potassium	ppm	ASTM D5185m	>20	6	0	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.3	0.5
Nitration	Abs/cm	*ASTM D7624	>20	8.0	9.1	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.4	22.3	24.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	2
Boron	ppm	ASTM D5185m		254	155	138
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		264	220	272
Manganese	ppm	ASTM D5185m		1	<1	2
Magnesium	ppm	ASTM D5185m		838	744	898
Calcium	ppm	ASTM D5185m		1433	1670	1631
Phosphorus	ppm	ASTM D5185m		883	877	830
Zinc	ppm	ASTM D5185m		1063	1134	1070
Sulfur	ppm	ASTM D5185m		3008	3104	3446
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.0	17.1	19.4
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.2	8.0	8.9
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	14.2	14.1


FT-IR (Direct Trend)

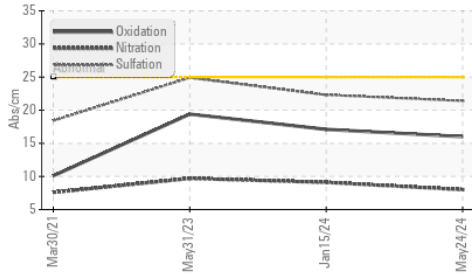


Ferrous Alloys

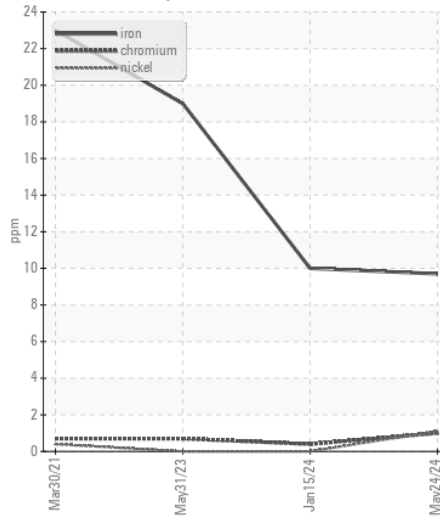


Base Number

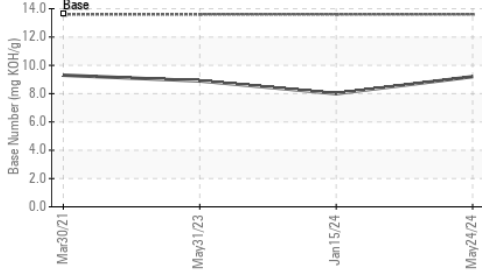


Viscosity @ 100°C

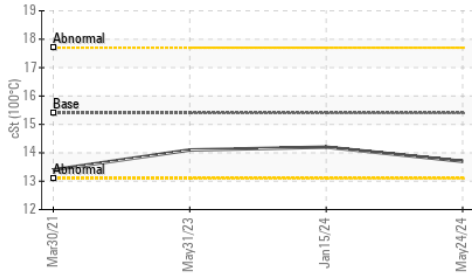


Non-ferrous Metals

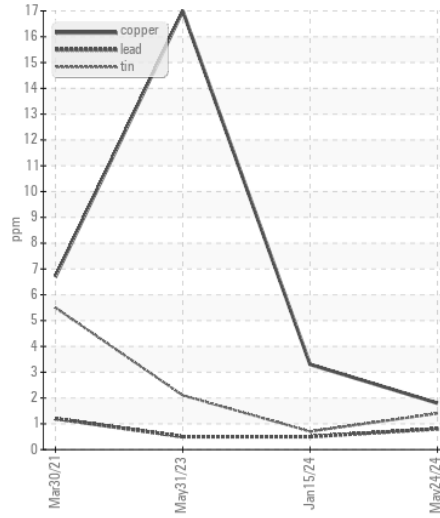

Viscosity @ 100°C

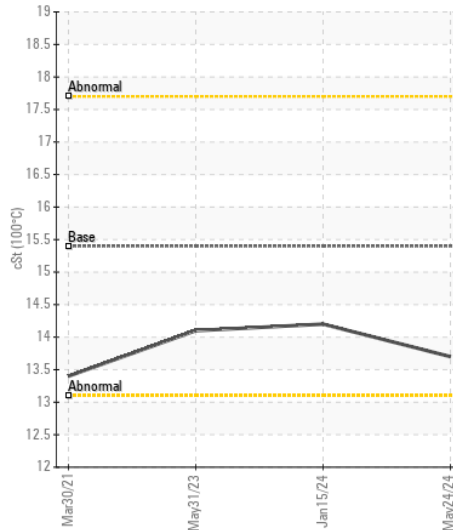

Base Number

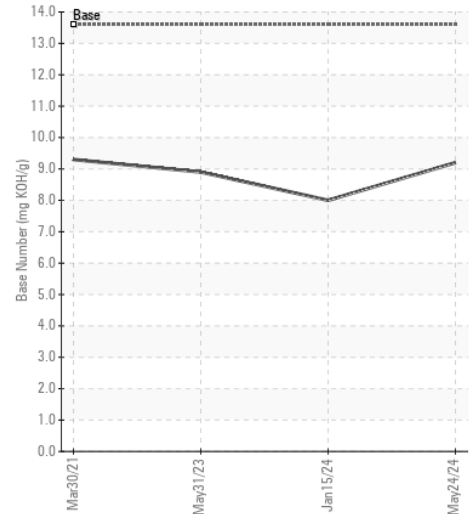

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0206900 **Received** : 28 May 2024
Lab Number : 06191968 **Tested** : 29 May 2024
Unique Number : 11048720 **Diagnosed** : 30 May 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819

Contact: WILMINGTON SHOP

todd.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we

T: (910)675-9211

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)