



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
LIEBHERR LH110 1227-155752
Component
Rear Right Wheel Hub
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0267541	LH0280590	LH0280590
Sample Date		Client Info		20 May 2024	18 Apr 2024	19 Mar 2024
Machine Age	hrs	Client Info		2578	1980	1544
Oil Age	hrs	Client Info		547	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		N/A	N/A	None
Sample Status				ATTENTION	ATTENTION	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>650	38	51	39
Chromium	ppm	ASTM D5185m	>4	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m	>4	<1	<1	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	1	<1	<1
Lead	ppm	ASTM D5185m	>4	<1	0	0
Copper	ppm	ASTM D5185m	>60	9	14	10
Tin	ppm	ASTM D5185m	>4	0	0	2
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	MODER

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	5	4
Potassium	ppm	ASTM D5185m	>20	1	0	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	MODER	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is lower than normal. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	2	<1	<1
Boron	ppm	ASTM D5185m	400	10	0	2
Barium	ppm	ASTM D5185m	200	0	0	0
Molybdenum	ppm	ASTM D5185m	12	5	1	2
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m	12	44	4	4
Calcium	ppm	ASTM D5185m	150	233	183	177
Phosphorus	ppm	ASTM D5185m	1650	407	481	469
Zinc	ppm	ASTM D5185m	125	171	105	93
Sulfur	ppm	ASTM D5185m	22500	13096	16597	16469
Visc @ 40°C	cSt	ASTM D445	143	80.9	96.4	99.6

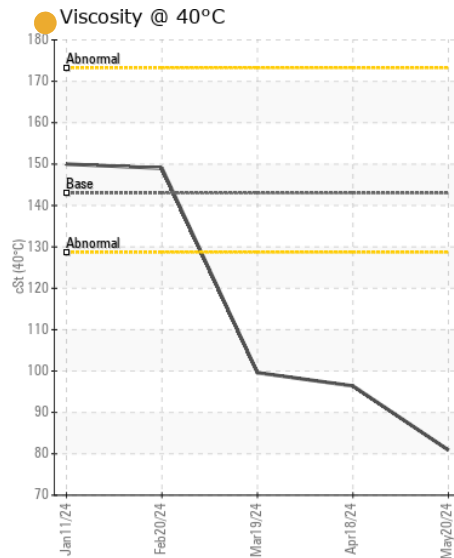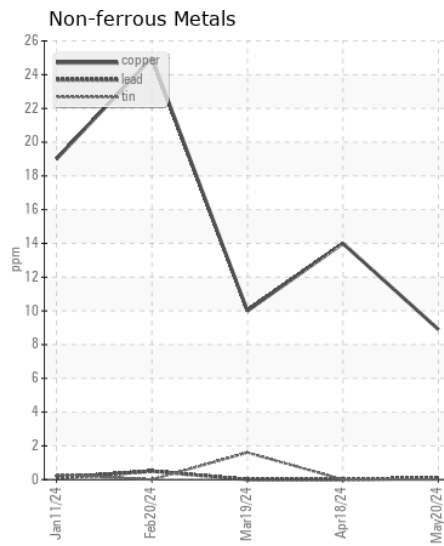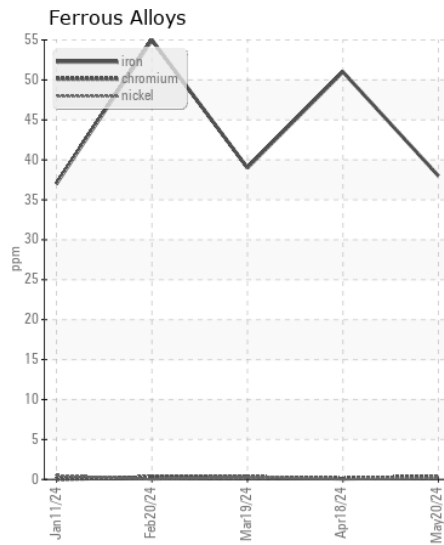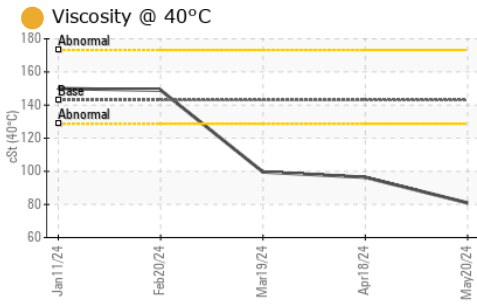

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0267541
Lab Number : 06192602
Unique Number : 11049354
Test Package : CONST
Received : 28 May 2024
Tested : 29 May 2024
Diagnosed : 30 May 2024 - Don Baldrige

KINDER MORGAN
 4301 IVERSON
 TRINITY, AL
 US 35601
 Contact: CHIP OAKES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (256)350-0006
 F: (256)355-5250