



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[TUCKER PAVING]

Machine Id

VOLVO L110H 631215

Component

Transmission (Auto)

Fluid

VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP454955	VCP440414	VCP426175
Sample Date		Client Info		23 May 2024	21 Feb 2024	03 Nov 2023
Machine Age	hrs	Client Info		13545	13022	12508
Oil Age	hrs	Client Info		0	0	4000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Changed
Filter Changed		Client Info		Not Chngd	Not Chngd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	19	11	23
Chromium	ppm	ASTM D5185m	>5	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>5	<1	0	0
Aluminum	ppm	ASTM D5185m	>50	3	2	10
Lead	ppm	ASTM D5185m	>50	0	1	0
Copper	ppm	ASTM D5185m	>225	2	2	2
Tin	ppm	ASTM D5185m	>10	0	1	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	4	4	5
Potassium	ppm	ASTM D5185m	>20	1	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	0	2
Boron	ppm	ASTM D5185m	187	94	113	71
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.0	<1	<1	0
Manganese	ppm	ASTM D5185m	0.0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	6.8	2	2	2
Calcium	ppm	ASTM D5185m	215	74	69	73
Phosphorus	ppm	ASTM D5185m	445	187	197	209
Zinc	ppm	ASTM D5185m	56	12	10	40
Sulfur	ppm	ASTM D5185m	1336	1893	2079	1806
Visc @ 40°C	cSt	ASTM D445	35.3	28.5	28.7	29.1

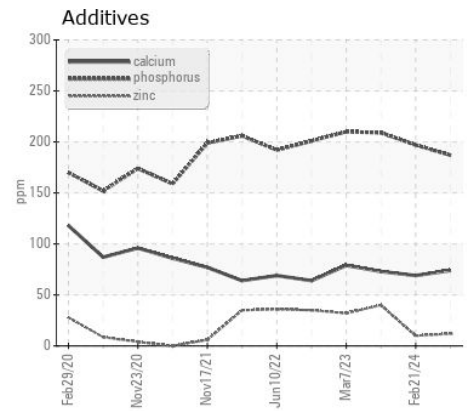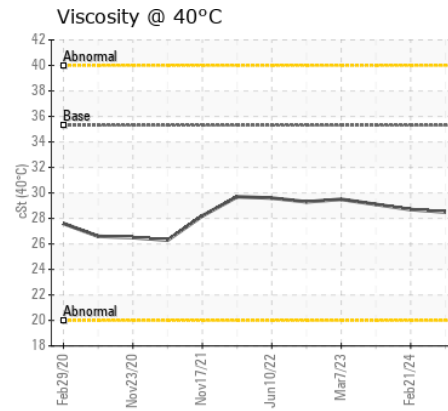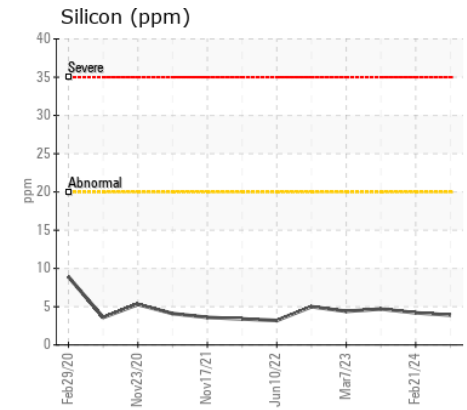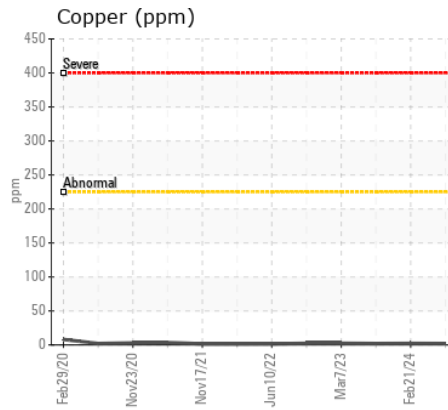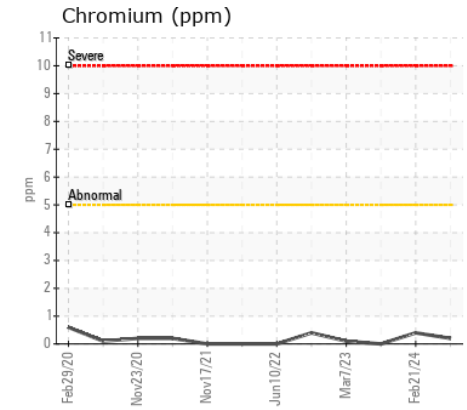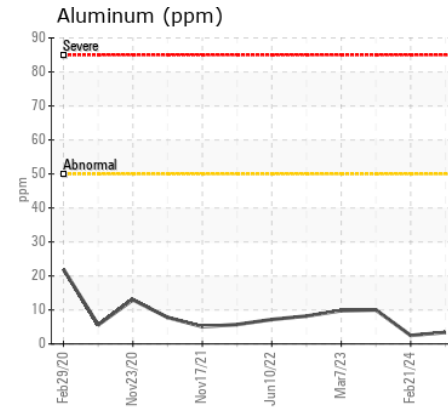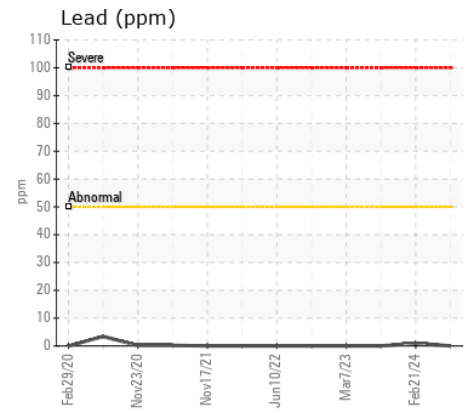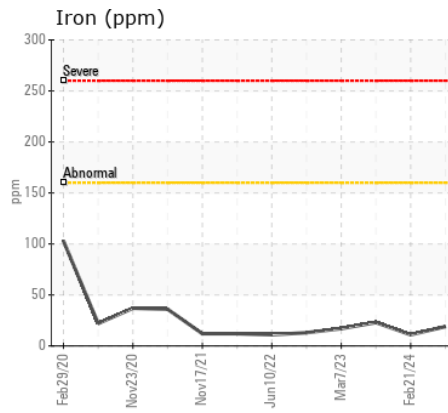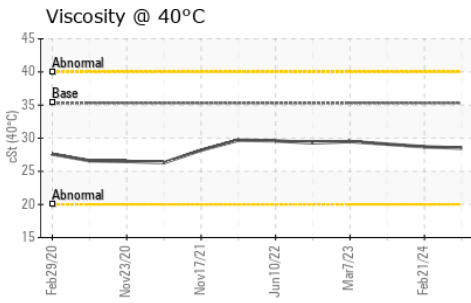

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP454955
Lab Number : 06192643
Unique Number : 11049395
Test Package : MOB 1

Received : 28 May 2024
Tested : 29 May 2024
Diagnosed : 30 May 2024 - Don Baldrige

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619

Contact: KENNY HANEY
 khaney@flaglerce.com

T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)