

Area
KEMP QUARRIES / KEMP STONE - FAIRLAND [69383]

Machine Id
OHT123
Component
Rear Right Final Drive

Fluid
PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: PM-2 sampled fluid)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0109044	PCA0070627	PCA0084737
Sample Date		Client Info		22 May 2024	02 Jan 2024	02 Oct 2023
Machine Age	hrs	Client Info		38485	37987	37517
Oil Age	hrs	Client Info		38485	37987	37517
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	38	27	66
Chromium	ppm	ASTM D5185m	>10	<1	0	3
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	1
Silver	ppm	ASTM D5185m		1	0	0
Aluminum	ppm	ASTM D5185m	>25	1	2	5
Lead	ppm	ASTM D5185m	>25	<1	0	1
Copper	ppm	ASTM D5185m	>50	3	2	30
Tin	ppm	ASTM D5185m	>10	<1	0	1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	17	17	66
Potassium	ppm	ASTM D5185m	>20	2	2	3
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	0	<1
Boron	ppm	ASTM D5185m	2	0	0	2
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	2	<1	2
Manganese	ppm	ASTM D5185m	0	<1	0	<1
Magnesium	ppm	ASTM D5185m	9	14	14	18
Calcium	ppm	ASTM D5185m	3114	2893	3399	3173
Phosphorus	ppm	ASTM D5185m	1099	901	950	903
Zinc	ppm	ASTM D5185m	1245	1077	1189	1145
Sulfur	ppm	ASTM D5185m	7086	4340	4500	4529
Visc @ 40°C	cSt	ASTM D445	213.9	175	189	183

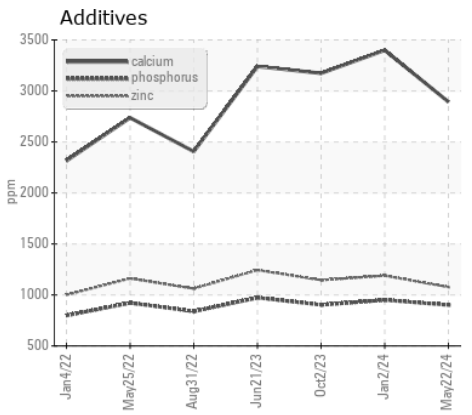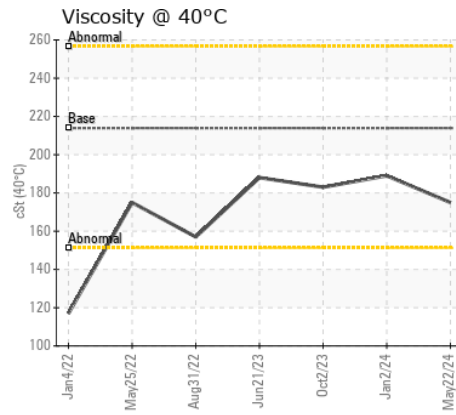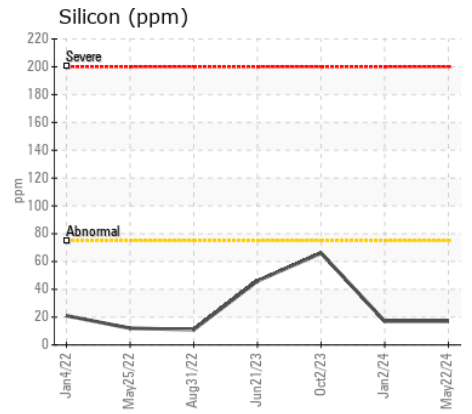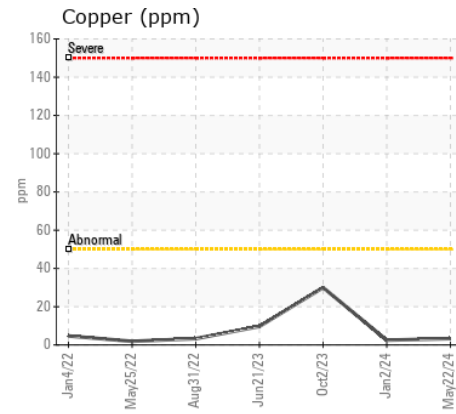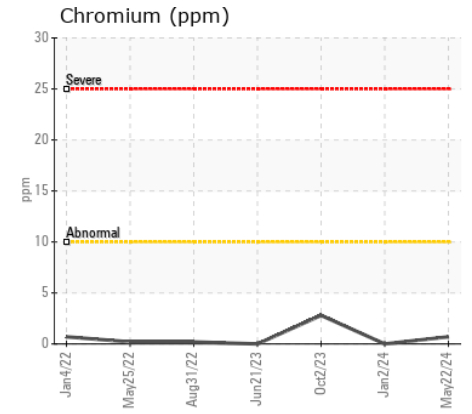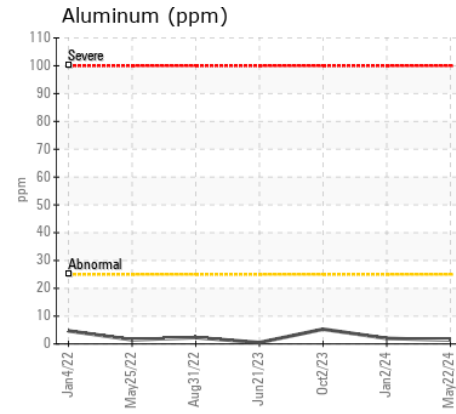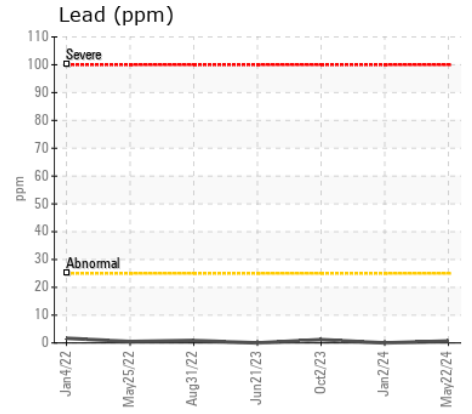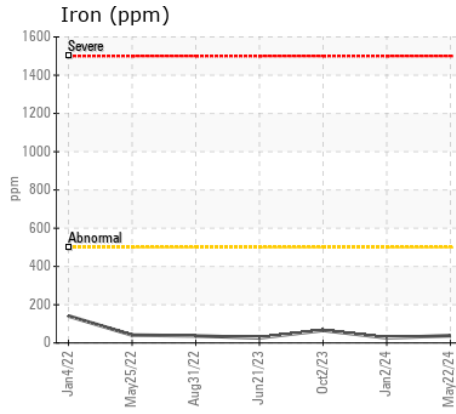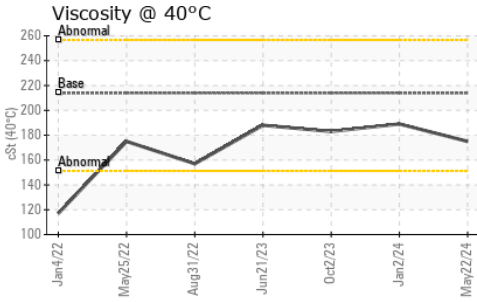

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109044
Lab Number : 06193092
Unique Number : 11049844
Test Package : MOB 1

Received : 28 May 2024
Tested : 30 May 2024
Diagnosed : 30 May 2024 - Sean Felton

Kemp Quarries - Kemp Stone - Fairland
 18350 S 590 Rd
 Fairland, OK
 US 74343

Contact: fairland@kempstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: