



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

WILLARD HAMMOND

Machine Id

[WILLARD HAMMOND] 007 587215-7

Component

Port Genset

Fluid

CHEVRON DELO 400 MULTIGRADE 15W40 (4 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0070928	MW0064394	MW0068069
Sample Date		Client Info		01 May 2024	31 Mar 2024	14 Mar 2024
Machine Age	hrs	Client Info		39898	39418	39202
Oil Age	hrs	Client Info		300	216	0
Filter Age	hrs	Client Info		300	216	0
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Filter Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	4	1	4
Chromium	ppm	ASTM D5185m	>4	0	0	0
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>5	<1	0	0
Aluminum	ppm	ASTM D5185m	>12	3	4	3
Lead	ppm	ASTM D5185m	>17	<1	0	0
Copper	ppm	ASTM D5185m	>70	0	0	<1
Tin	ppm	ASTM D5185m	>15	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	5	5	5
Potassium	ppm	ASTM D5185m	>20	<1	<1	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.4	6.2	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.8	22.9	23.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	1	2
Boron	ppm	ASTM D5185m	151	361	364	313
Barium	ppm	ASTM D5185m	0.4	0	<1	0
Molybdenum	ppm	ASTM D5185m	250	128	127	128
Manganese	ppm	ASTM D5185m		2	1	2
Magnesium	ppm	ASTM D5185m	0	681	665	673
Calcium	ppm	ASTM D5185m	2046	1925	1707	1847
Phosphorus	ppm	ASTM D5185m	1043	883	738	734
Zinc	ppm	ASTM D5185m	943	1085	863	856
Sulfur	ppm	ASTM D5185m	5012	3598	3143	3158
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.4	16.6	17.3
Base Number (BN)	mg KOH/g	ASTM D2896	12.5	8.5	8.8	8.7
Visc @ 100°C	cSt	ASTM D445	14.4	13.1	13.1	13.1


FT-IR (Direct Trend)

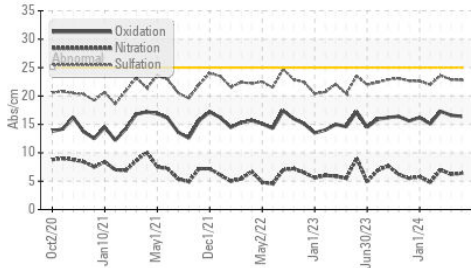


Base Number

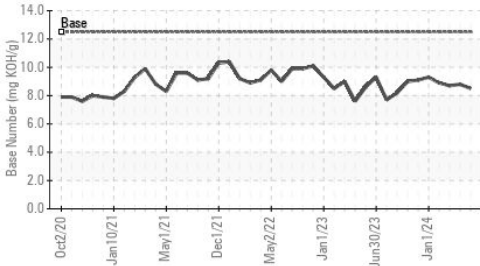


Viscosity @ 100°C

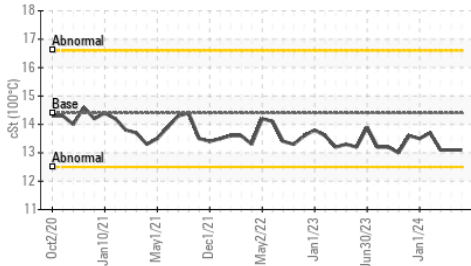


Ferrous Alloys

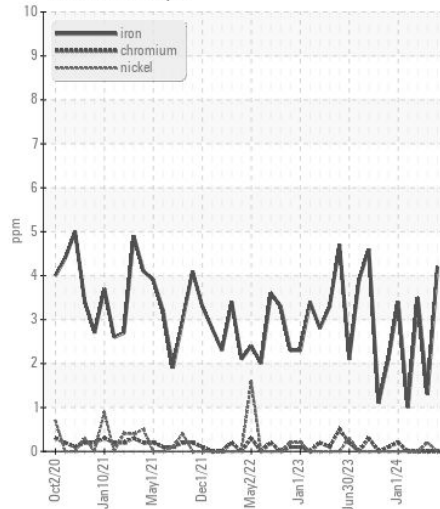


Non-ferrous Metals

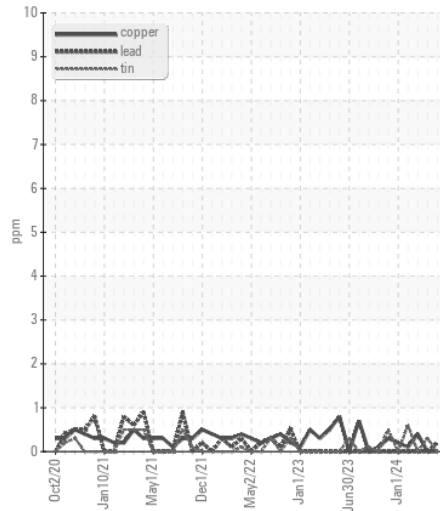

Viscosity @ 100°C

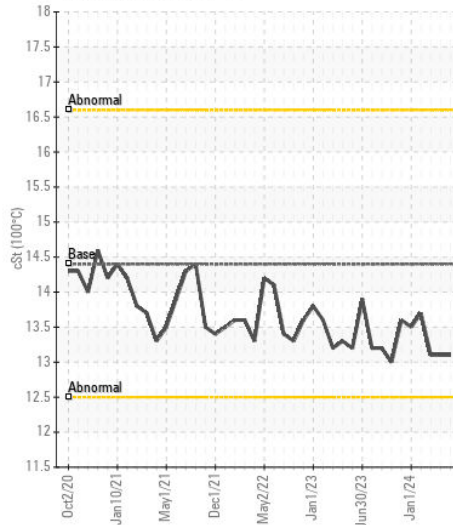

Base Number

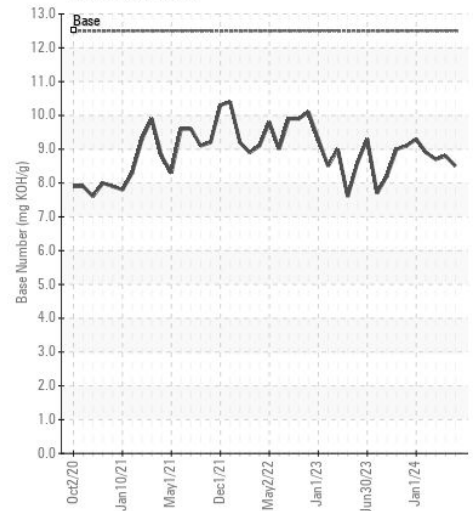

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0070928

Lab Number : 06193328

Unique Number : 11050080

Test Package : MAR 2

Received : 28 May 2024

Tested : 30 May 2024

Diagnosed : 30 May 2024 - Wes Davis

INGRAM BARGE

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: CHARLES COPELAND

charles.copeland@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)