



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
INTERNATIONAL 5919709
Component
Diesel Engine
Fluid
VALVOLINE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0036648	IL05952582	IL05875323
Sample Date		Client Info		10 May 2024	17 Aug 2023	17 May 2023
Machine Age	mls	Client Info		323704	278587	261532
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	N/A
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	15	20	10
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	1	0	0
Aluminum	ppm	ASTM D5185m	>20	4	<1	5
Lead	ppm	ASTM D5185m	>40	<1	<1	0
Copper	ppm	ASTM D5185m	>330	2	<1	<1
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	6	6	5
Potassium	ppm	ASTM D5185m	>20	2	4	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.5	0.3
Nitration	Abs/cm	*ASTM D7624	>20	11.2	11.3	10.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.6	24.3	21.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	3	2
Boron	ppm	ASTM D5185m	39	26	57	64
Barium	ppm	ASTM D5185m	1	0	0	0
Molybdenum	ppm	ASTM D5185m	49	56	73	59
Manganese	ppm	ASTM D5185m	1	1	<1	<1
Magnesium	ppm	ASTM D5185m	616	749	673	770
Calcium	ppm	ASTM D5185m	1554	1246	1469	1261
Phosphorus	ppm	ASTM D5185m	899	749	875	830
Zinc	ppm	ASTM D5185m	1069	924	1134	1030
Sulfur	ppm	ASTM D5185m	2624	2767	3291	3186
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.7	21.2	18.5
Base Number (BN)	mg KOH/g	ASTM D2896	6.9	6.8	6.1	8.1
Visc @ 100°C	cSt	ASTM D445	13.6	12.9	13.3	13.2


FT-IR (Direct Trend)

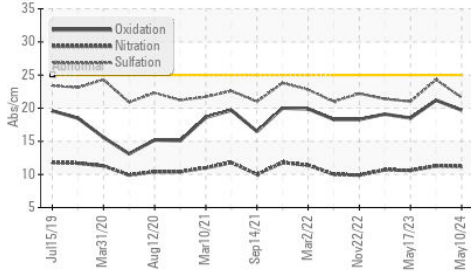


Base Number

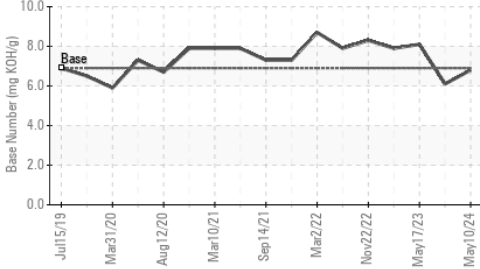


Viscosity @ 100°C

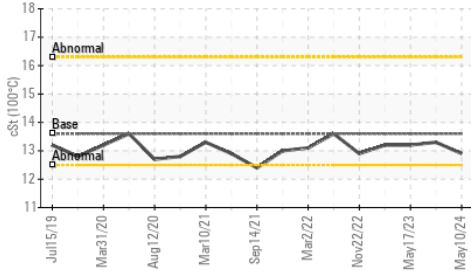


Ferrous Alloys

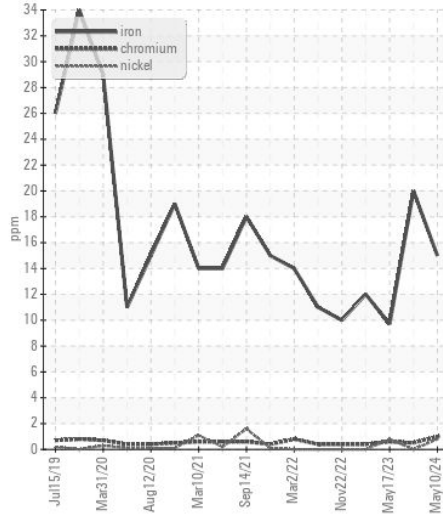


Non-ferrous Metals

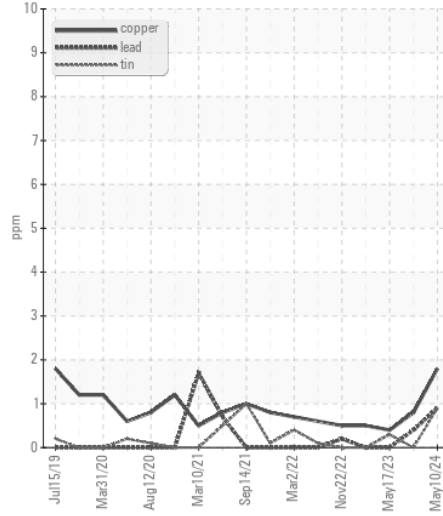

Viscosity @ 100°C

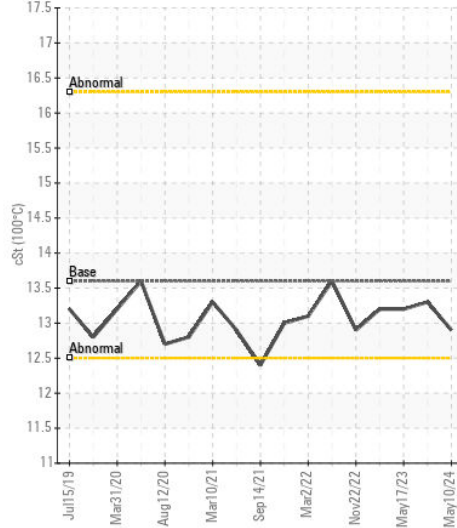

Base Number

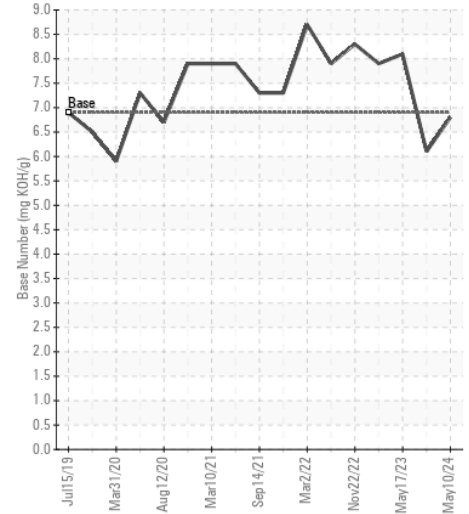

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : IL0036648

Lab Number : 06193601

Unique Number : 11050353

Test Package : FLEET

Received : 29 May 2024

Tested : 30 May 2024

Diagnosed : 30 May 2024 - Wes Davis

TAMPA IDEALEASE

5951 ORIENT ROAD

TAMPA, FL

US 33610-9565

Contact: Russ Cook

russcook@idealease.com

T: (813)626-9285

F: (844)270-1356

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)