



VOLVO

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[42198]

Machine Id

VOLVO L110H 631798

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP447503	VCP244427	VCP255910
Sample Date		Client Info		24 May 2024	23 Jan 2020	23 Oct 2019
Machine Age	hrs	Client Info		4126	0	1108
Oil Age	hrs	Client Info		0	1719	0
Filter Age	hrs	Client Info		0	1719	0
Oil Changed		Client Info		Changed	N/A	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

The aluminum level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	27	11	9
Chromium	ppm	ASTM D5185m	>10	1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	<1	<1	<1
Aluminum	ppm	ASTM D5185m	>10	▲ 26	6	8
Lead	ppm	ASTM D5185m	>20	2	3	1
Copper	ppm	ASTM D5185m	>15	2	5	5
Tin	ppm	ASTM D5185m	>10	2	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	7	6	7
Potassium	ppm	ASTM D5185m	>20	4	5	2
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.2	7.6	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.4	19.4	20.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	5	3
Boron	ppm	ASTM D5185m	2.5	51	66	60
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	41	20	22
Manganese	ppm	ASTM D5185m	0.0	1	2	1
Magnesium	ppm	ASTM D5185m	256	518	738	672
Calcium	ppm	ASTM D5185m	2057	1680	1754	1637
Phosphorus	ppm	ASTM D5185m	935	955	693	724
Zinc	ppm	ASTM D5185m	1223	1110	875	909
Sulfur	ppm	ASTM D5185m	4079	3256	2564	2522
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.3	15	16.3
Base Number (BN)	mg KOH/g	ASTM D2896	10	9.8	---	---
Visc @ 100°C	cSt	ASTM D445	15.0	13.6	13.6	13.7


▲ Aluminum (ppm)

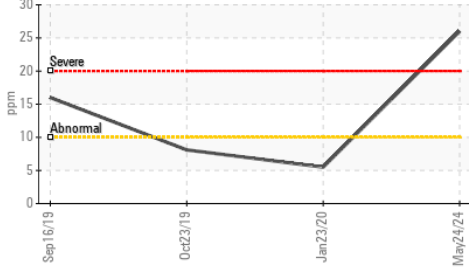


Iron (ppm)

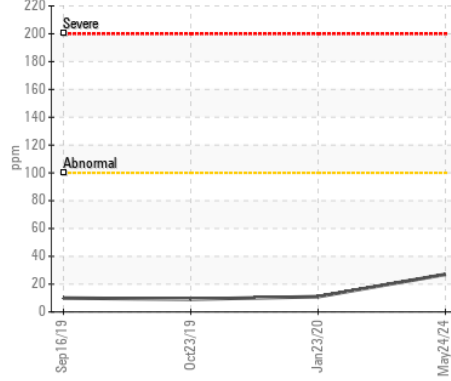


Lead (ppm)

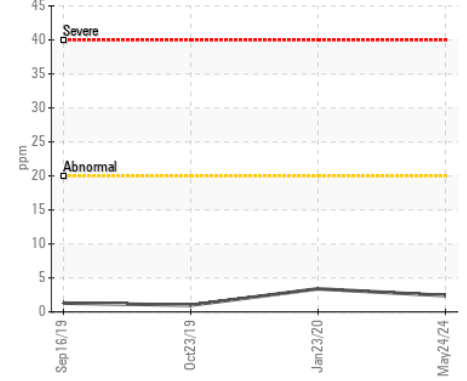


FT-IR (Direct Trend)

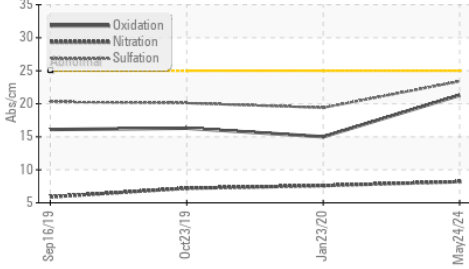


▲ Aluminum (ppm)

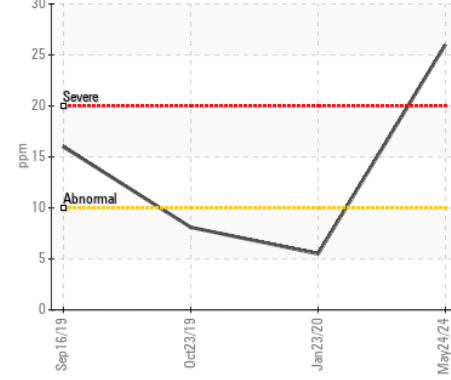


Chromium (ppm)

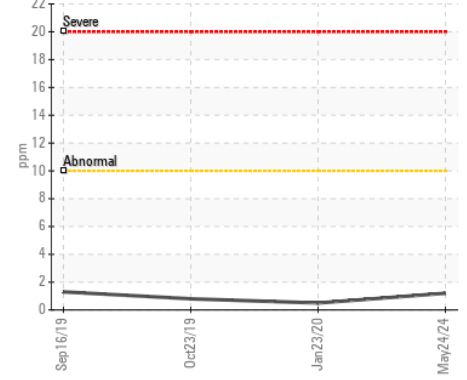


Base Number

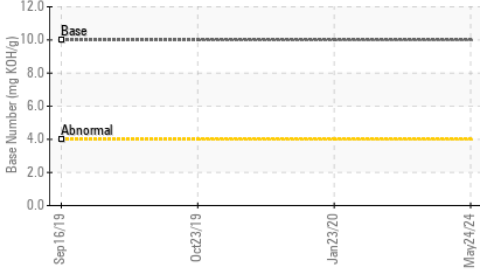


Copper (ppm)

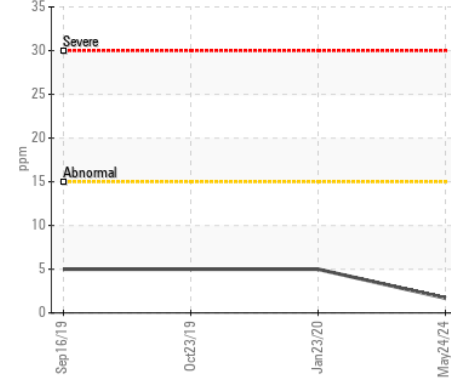


Silicon (ppm)

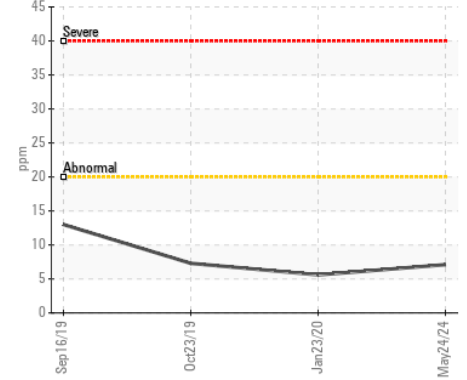


Viscosity @ 100°C

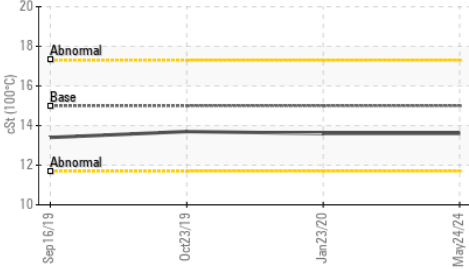

Viscosity @ 100°C

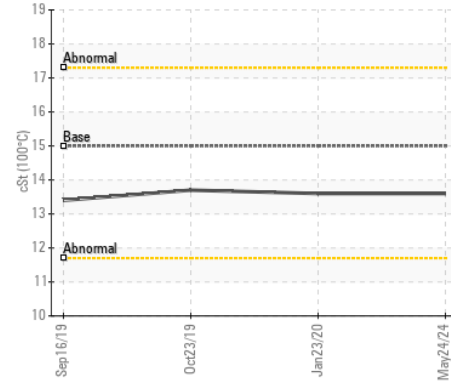

Base Number

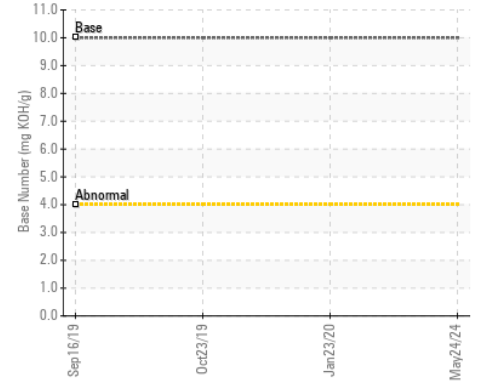

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP447503

Lab Number : 06193724

Unique Number : 11050476

Test Package : MOB 1 (Additional Tests: TBN)

Received : 29 May 2024

Tested : 30 May 2024

Diagnosed : 30 May 2024 - Sean Felton

215 - ASCENDUM MACHINERY INC - CAYCE

2303 AIRPORT BLVD

CAYCE, SC

US 29033

Contact: TAMI BROWDER

tami.browder@ascendummachinery.com

T: (803)923-2138

F: (803)791-9920

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)