



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

Ascendum Machinery/250 Hour CSA

Machine Id

KUBOTA U55-5 2151 (S/N 10245)

Component

Diesel Engine

Fluid

VOLVO VDS-4.5 Premium Motor Oil 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0010026	ASC0006176	VCP0004834
Sample Date		Client Info		21 May 2024	23 Jan 2024	06 Oct 2022
Machine Age	hrs	Client Info		4109	3696	1907
Oil Age	hrs	Client Info		413	1789	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	27	52	10
Chromium	ppm	ASTM D5185m	>20	<1	1	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	7	7	2
Lead	ppm	ASTM D5185m	>40	<1	0	0
Copper	ppm	ASTM D5185m	>330	8	52	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	11	12	4
Potassium	ppm	ASTM D5185m	>20	3	1	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.8	1.5	0.5
Nitration	Abs/cm	*ASTM D7624	>20	8.0	11.2	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.6	23.4	20.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	4	<1
Boron	ppm	ASTM D5185m		6	2	9
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		60	60	63
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		921	902	888
Calcium	ppm	ASTM D5185m		1111	1016	1157
Phosphorus	ppm	ASTM D5185m		1023	924	1000
Zinc	ppm	ASTM D5185m		1231	1205	1180
Sulfur	ppm	ASTM D5185m		3326	2440	3618
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.7	19.8	15.8
Base Number (BN)	mg KOH/g	ASTM D2896		8.6	6.6	9.7
Visc @ 100°C	cSt	ASTM D445		14.5	14.4	14.0


FT-IR (Direct Trend)

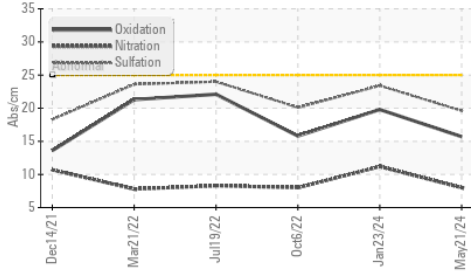


Base Number

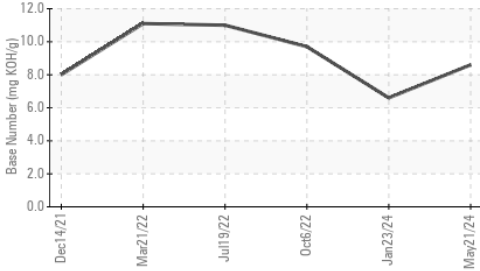


Viscosity @ 100°C

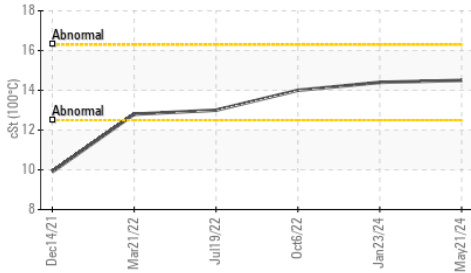


Ferrous Alloys

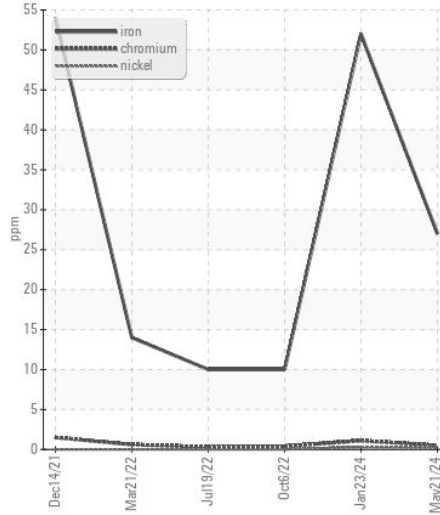


Non-ferrous Metals

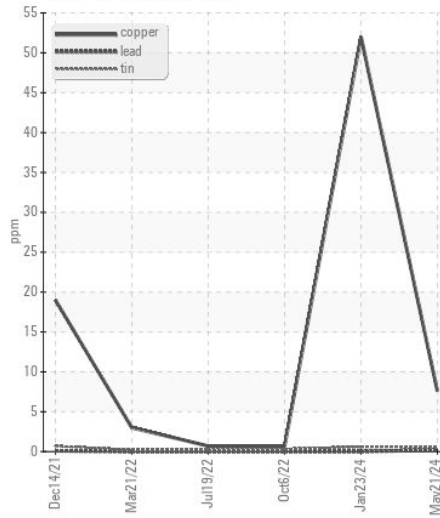

Viscosity @ 100°C

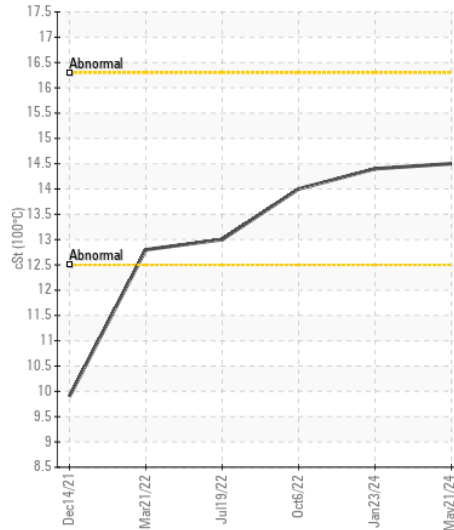

Base Number

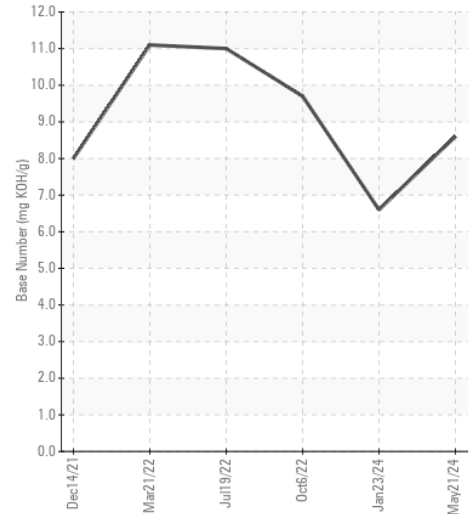

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0010026 **Received** : 29 May 2024
Lab Number : 06193732 **Tested** : 30 May 2024
Unique Number : 11050484 **Diagnosed** : 30 May 2024 - Sean Felton
Test Package : CONST (Additional Tests: TBN)

TRIANGLE GRADING AND PAVING INC
 1521 Huffman Mill Rd
 BURLINGTON, NC
 US 27216
 Contact: KAREN HILLIARD
 khilliard@trianglegradingpaving.com
 T: (336)584-1745
 F: (336)584-0145

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)