



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id  
**VOLVO L150H 6982**  
Component  
**Diesel Engine**  
Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011437	ASC0008768	ASC0006301
Sample Date		Client Info		16 May 2024	12 Mar 2024	03 Jan 2024
Machine Age	hrs	Client Info		4601	4134	3120
Oil Age	hrs	Client Info		4134	4134	3120
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	ATTENTION	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	2	3	0
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	<1	0
Lead	ppm	ASTM D5185m	>40	<1	0	<1
Copper	ppm	ASTM D5185m	>20	<1	3	0
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	3	2	1
Potassium	ppm	ASTM D5185m	>20	2	0	<1
Fuel		WC Method	>6.0	<1.0	0.6	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.4	7.1	6.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.1	17.8	17.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	<1	<1
Boron	ppm	ASTM D5185m	2.5	2	3	6
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	58	56	55
Manganese	ppm	ASTM D5185m	0.0	<1	0	0
Magnesium	ppm	ASTM D5185m	256	935	914	926
Calcium	ppm	ASTM D5185m	2057	1052	1121	1074
Phosphorus	ppm	ASTM D5185m	935	1051	1011	968
Zinc	ppm	ASTM D5185m	1223	1230	1172	1268
Sulfur	ppm	ASTM D5185m	4079	3463	3444	2989
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.9	14.3	13.8
Base Number (BN)	mg KOH/g	ASTM D2896	10	9.0	8.2	8.4
Visc @ 100°C	cSt	ASTM D445	15.0	13.3	12.4	13.9

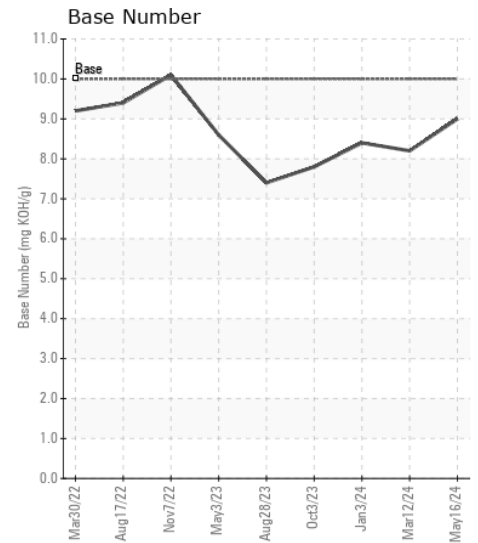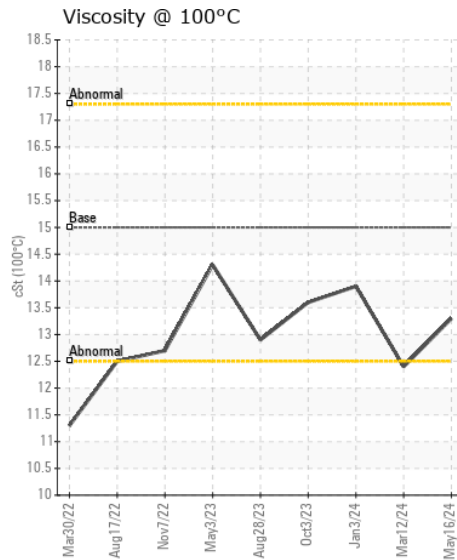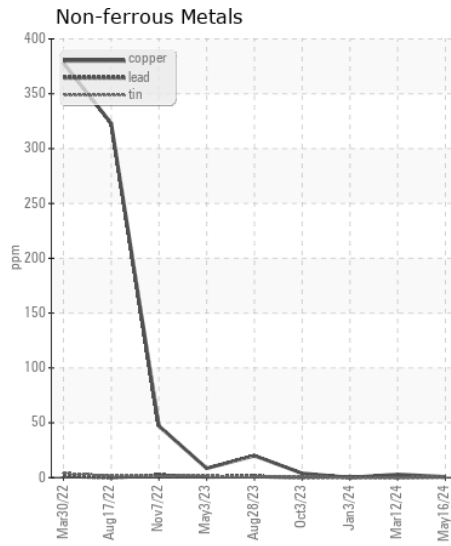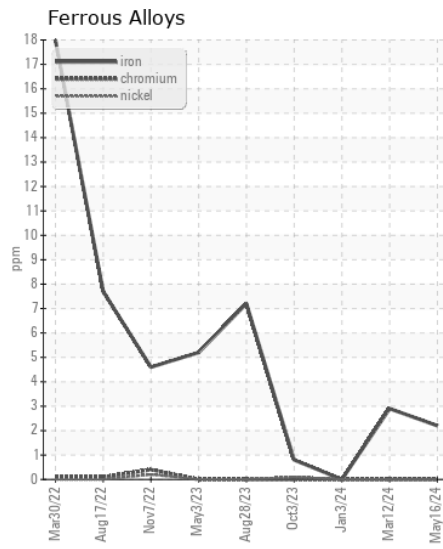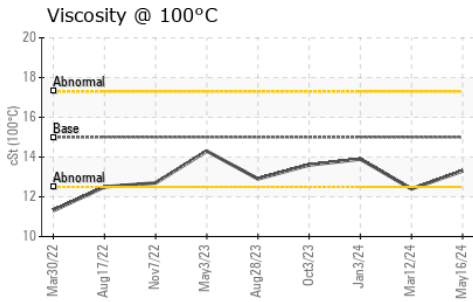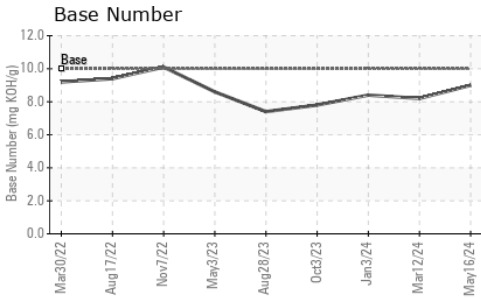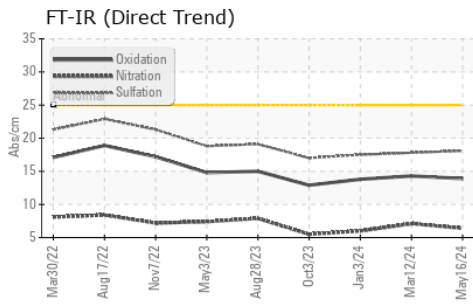

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : ASC0011437

**Lab Number** : 06193756

**Unique Number** : 11050508

**Test Package** : CONST ( Additional Tests: TBN )

**Received** : 29 May 2024

**Tested** : 30 May 2024

**Diagnosed** : 30 May 2024 - Sean Felton

**117 - ASCENDUM MACHINERY INC - GREENVILLE**

2002 N GREENE ST

GREENVILLE, NC

US 27834

Contact: BRANDON JENKINS

BRANDON.JENKINS@ASCENDUMMACHINERY.COM

T:

F: (704)494-8197

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)