



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 300G 1FF300GXVJF730720**  
 Component  
**Hydraulic System**  
 Fluid  
**HITACHI HYDRAULIC SUPER EX 46HN (41 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0215974</b>	JR0198277	JR0177312
Sample Date		Client Info		<b>24 May 2024</b>	26 Jan 2024	15 Aug 2023
Machine Age	hrs	Client Info		<b>0</b>	4719	4380
Oil Age	hrs	Client Info		<b>0</b>	4719	4380
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	N/A
Filter Changed		Client Info		<b>N/A</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	<b>11</b>	17	12
Iron	ppm	ASTM D5185m	>32	<b>15</b>	<1	6
Chromium	ppm	ASTM D5185m	>9	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>0</b>	2	0
Lead	ppm	ASTM D5185m	>28	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>11	<b>&lt;1</b>	2	<1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	<1
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>80000	<b>44674</b>	47297	11310
Particles >6µm		ASTM D7647	>20000	<b>1710</b>	10705	467
Particles >14µm		ASTM D7647	>640	<b>3</b>	249	16
Particles >21µm		ASTM D7647	>160	<b>1</b>	45	5
Particles >38µm		ASTM D7647	>40	<b>0</b>	1	0
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	<b>23/18/9</b>	23/21/15	21/16/11
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<b>&lt;1</b>	0	0
Boron	ppm	ASTM D5185m		<b>0</b>	4	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m		<b>0</b>	6	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	18	<1
Calcium	ppm	ASTM D5185m		<b>15</b>	42	7
Phosphorus	ppm	ASTM D5185m	827	<b>499</b>	598	442
Zinc	ppm	ASTM D5185m	0	<b>50</b>	19	48
Sulfur	ppm	ASTM D5185m	13	<b>503</b>	20	435
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	<b>0.26</b>	0.097	0.24
Visc @ 40°C	cSt	ASTM D445	47	<b>41.2</b>	49.7	41.8

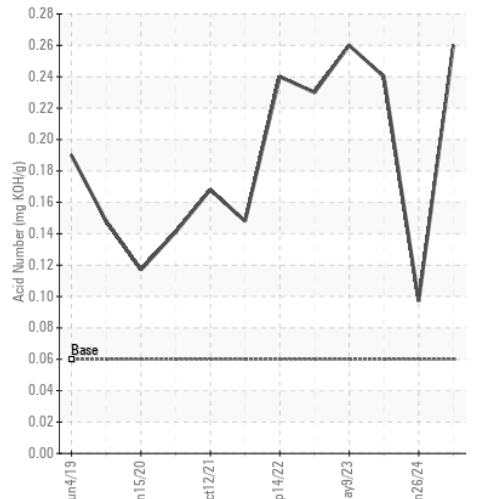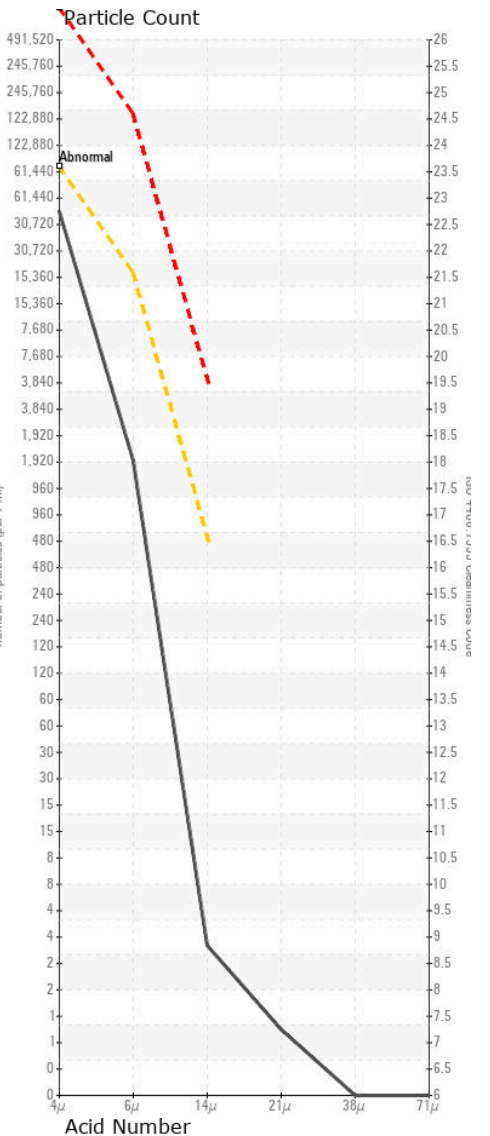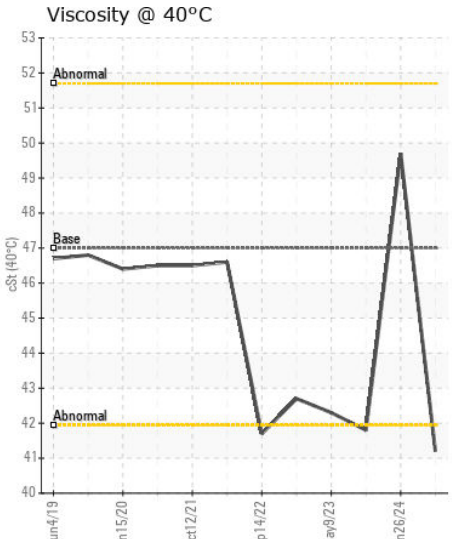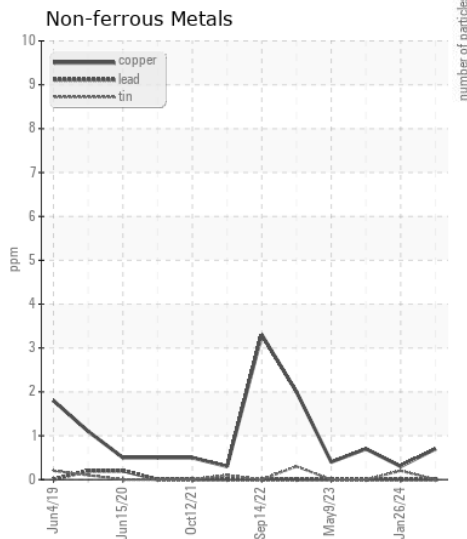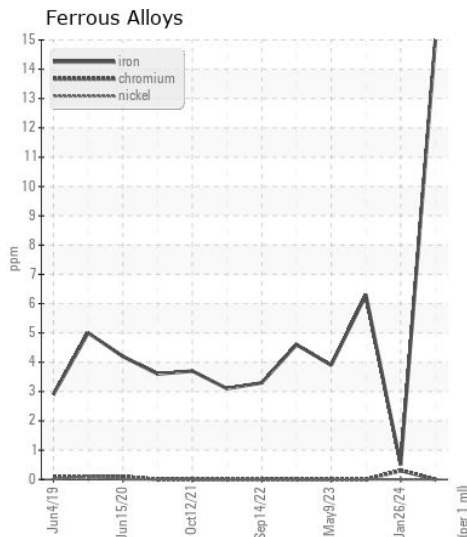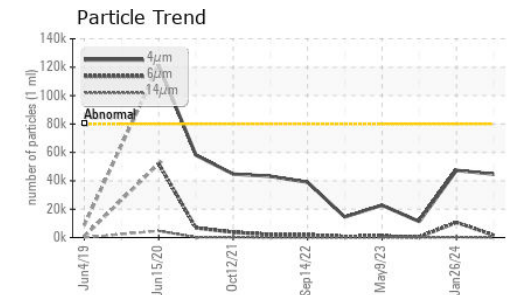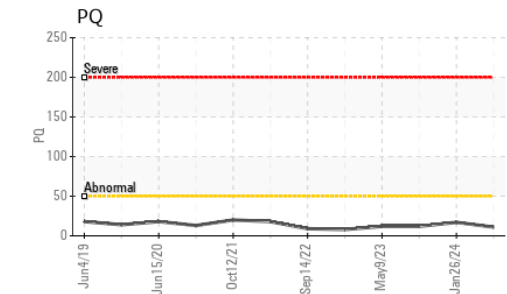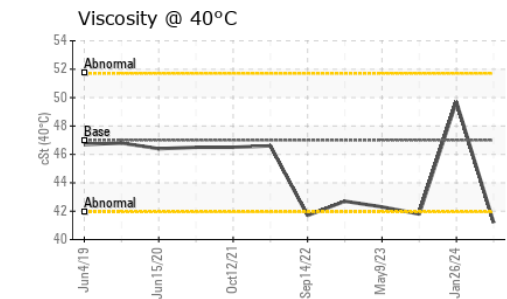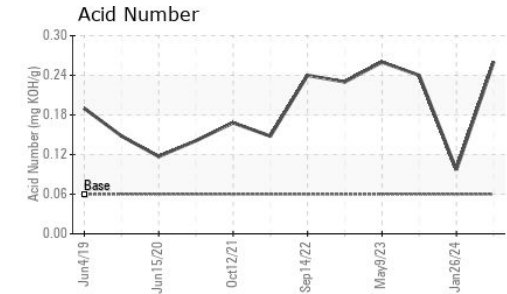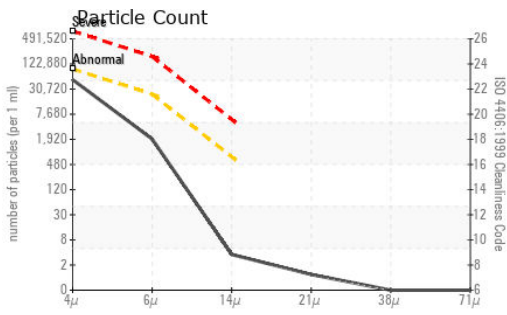

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0215974 **Received** : 29 May 2024  
**Lab Number** : 06193883 **Tested** : 30 May 2024  
**Unique Number** : 11056006 **Diagnosed** : 31 May 2024 - Angela Borella  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269  
 Contact: CHARLOTTE SHOP  
 myoung@jamesriverequipment.com  
 T: (704)597-0211  
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)