



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
VOLVO EC300EL 313148
 Component
Rear Left Final Drive
 Fluid
VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP437551	---	---
Sample Date		Client Info		14 May 2024	---	---
Machine Age	hrs	Client Info		7144	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	445	---	---
Chromium	ppm	ASTM D5185m	>10	9	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	0	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>50	0	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	8	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	379	67	---	---
Barium	ppm	ASTM D5185m	0.0	<1	---	---
Molybdenum	ppm	ASTM D5185m	0.8	0	---	---
Manganese	ppm	ASTM D5185m	0.0	5	---	---
Magnesium	ppm	ASTM D5185m	31	0	---	---
Calcium	ppm	ASTM D5185m	38	14	---	---
Phosphorus	ppm	ASTM D5185m	1077	1532	---	---
Zinc	ppm	ASTM D5185m	46	4	---	---
Sulfur	ppm	ASTM D5185m	23526	26974	---	---
Visc @ 40°C	cSt	ASTM D445	139	194	---	---

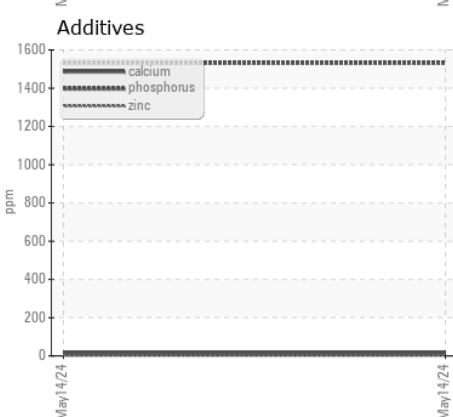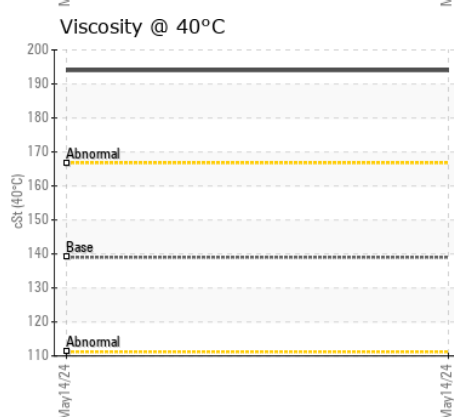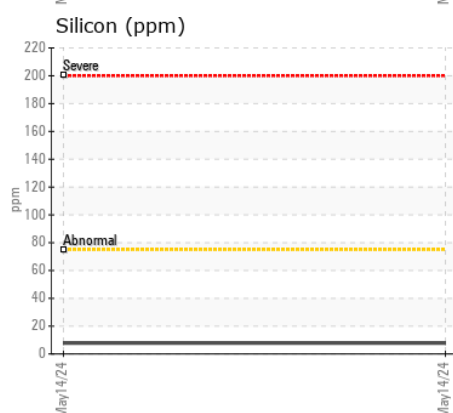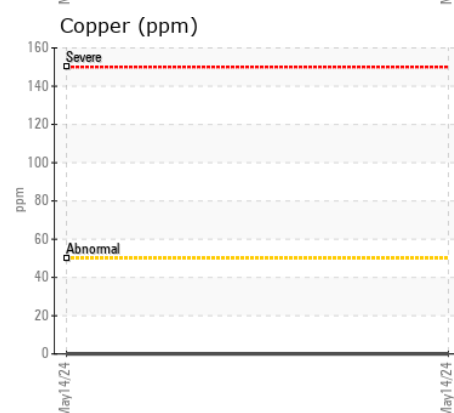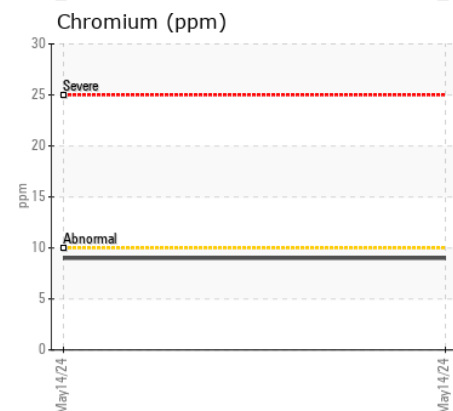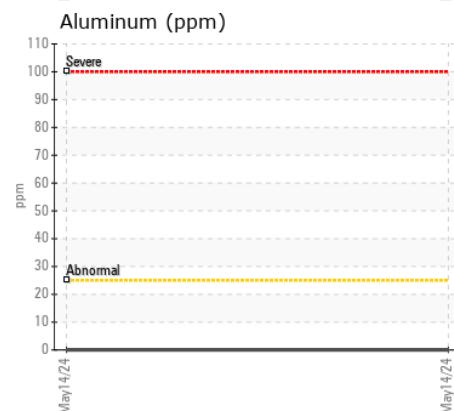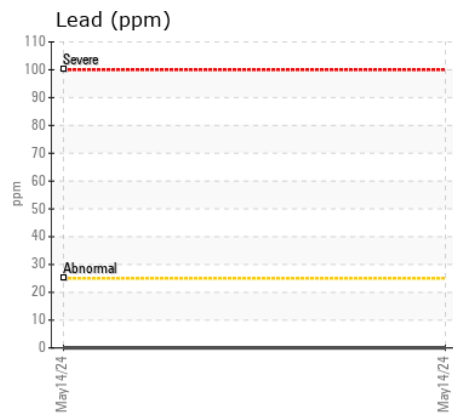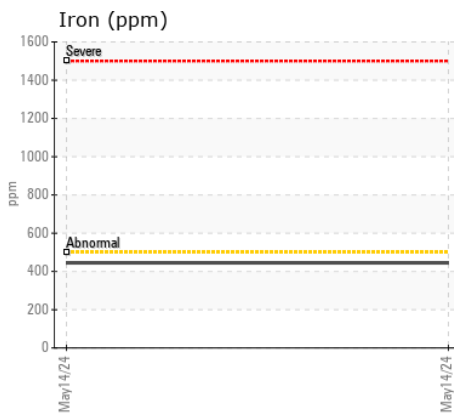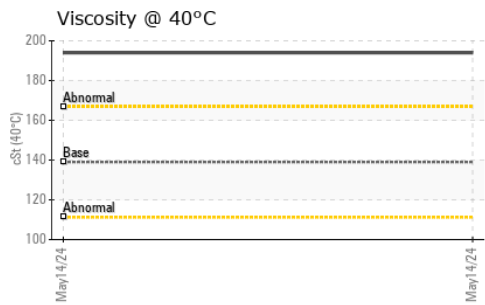

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP437551 **Received** : 29 May 2024
Lab Number : 06194424 **Tested** : 31 May 2024
Unique Number : 11056547 **Diagnosed** : 31 May 2024 - Don Baldrige
Test Package : MOB 1

CITY CARTING
 221 OLD GATE LN
 MILFORD, CT
 US 06460
 Contact: TAVINS BANKS
 tavins@citycart.net
 T: (203)223-3885
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)