



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[41850]

Machine Id

VOLVO A40G 352912

Component

Transmission (Auto)

Fluid

VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP453839	VCP420561	---
Sample Date		Client Info		22 May 2024	17 Jul 2023	---
Machine Age	hrs	Client Info		4094	2926	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	39	17	---
Chromium	ppm	ASTM D5185m	>5	<1	0	---
Nickel	ppm	ASTM D5185m	>5	2	1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>5	<1	0	---
Aluminum	ppm	ASTM D5185m	>50	22	12	---
Lead	ppm	ASTM D5185m	>50	<1	0	---
Copper	ppm	ASTM D5185m	>225	18	10	---
Tin	ppm	ASTM D5185m	>10	4	2	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	7	5	---
Potassium	ppm	ASTM D5185m	>20	2	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	3	---
Boron	ppm	ASTM D5185m	187	79	97	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.0	0	0	---
Manganese	ppm	ASTM D5185m	0.0	1	<1	---
Magnesium	ppm	ASTM D5185m	6.8	1	0	---
Calcium	ppm	ASTM D5185m	215	251	71	---
Phosphorus	ppm	ASTM D5185m	445	246	200	---
Zinc	ppm	ASTM D5185m	56	75	0	---
Sulfur	ppm	ASTM D5185m	1336	2202	2143	---
Visc @ 40°C	cSt	ASTM D445	35.3	30.0	28.6	---

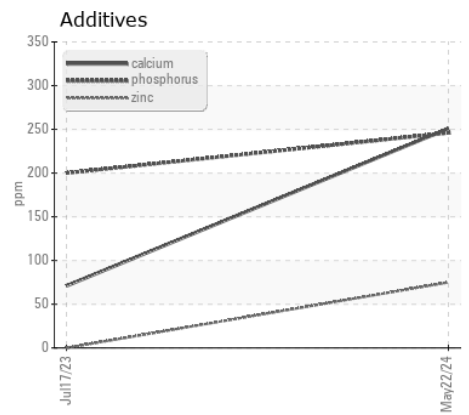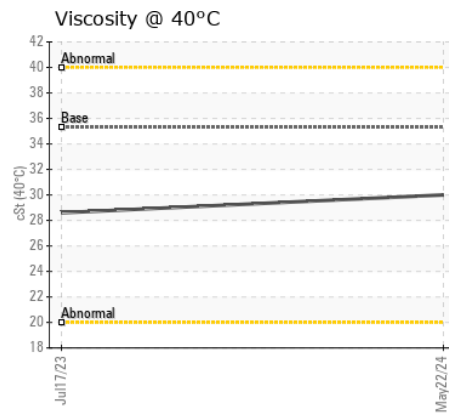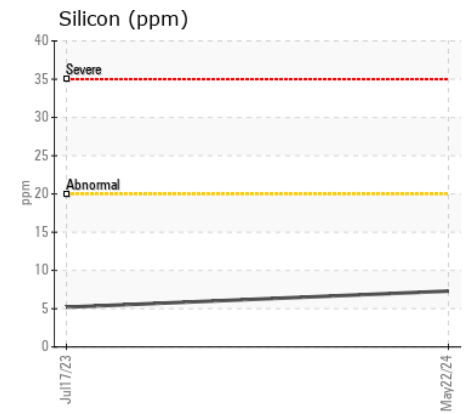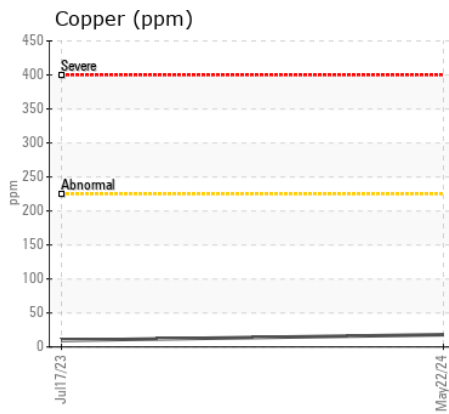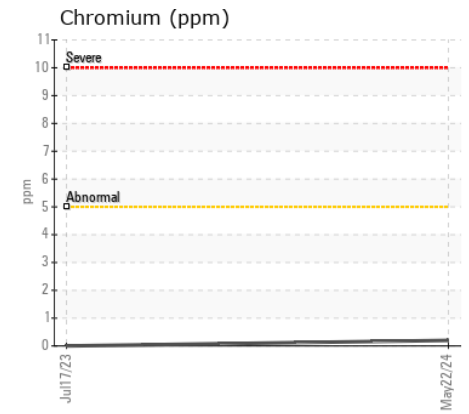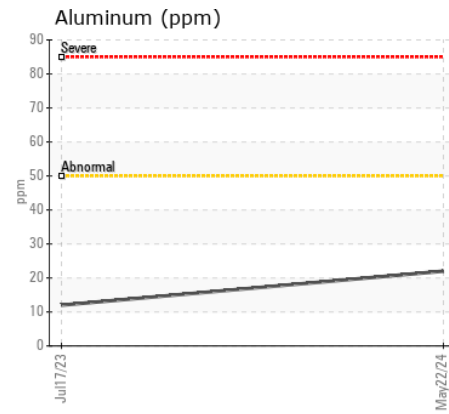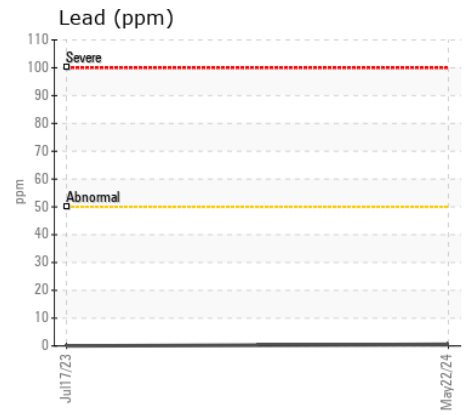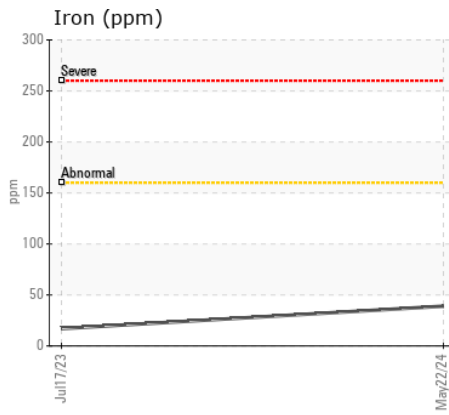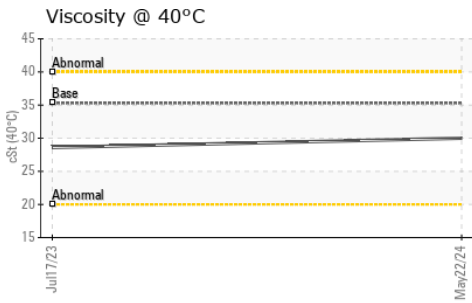

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP453839
Lab Number : 06194484
Unique Number : 11056607
Test Package : MOB 1

Received : 29 May 2024
Tested : 30 May 2024
Diagnosed : 30 May 2024 - Wes Davis

215 - ASCENDUM MACHINERY INC - CAYCE
 2303 AIRPORT BLVD
 CAYCE, SC
 US 29033

Contact: ROBBY HERLONG
 robby.herlong@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (803)394-6783
 F: (803)791-9920