



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
DANIELI TUNDISH 3

Component
Hydraulic System

Fluid
ANDEROL BIO GUARD FRHF 46 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		AN06194639	AN06151132	AN06151120
Sample Date		Client Info		11 Apr 2024	12 Mar 2024	23 Feb 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	2	<1	<1
Chromium	ppm	ASTM D5185m	>20	2	<1	<1
Nickel	ppm	ASTM D5185m	>20	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		1	0	0
Aluminum	ppm	ASTM D5185m	>20	4	3	3
Lead	ppm	ASTM D5185m	>20	5	3	3
Copper	ppm	ASTM D5185m	>20	1	2	2
Tin	ppm	ASTM D5185m	>20	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>15	1	0	0
Potassium	ppm	ASTM D5185m	>20	<1	3	2
Water	%	ASTM D6304	>0.05	0.047	0.044	0.047
ppm Water	ppm	ASTM D6304	>500	473	443	479
Particles >4µm		ASTM D7647	>5000	3297	4238	4674
Particles >6µm		ASTM D7647	>1300	535	323	511
Particles >14µm		ASTM D7647	>160	36	8	72
Particles >21µm		ASTM D7647	>40	11	2	27
Particles >38µm		ASTM D7647	>10	1	0	2
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/16/12	19/16/10	19/16/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	3	3
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	1	1
Magnesium	ppm	ASTM D5185m		2	3	2
Calcium	ppm	ASTM D5185m		0	2	2
Phosphorus	ppm	ASTM D5185m	196	476	547	539
Zinc	ppm	ASTM D5185m		5	<1	0
Sulfur	ppm	ASTM D5185m	1440	1540	1852	1844
Acid Number (AN)	mg KOH/g	ASTM D8045	1	1.96	2.25	2.08
Visc @ 40°C	cSt	ASTM D445	45.41	47.4	47.4	47.5

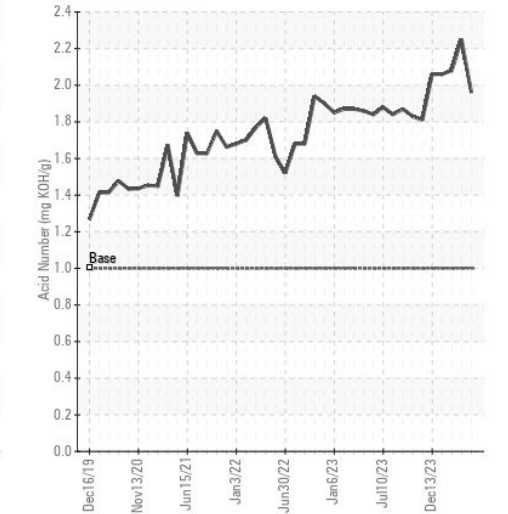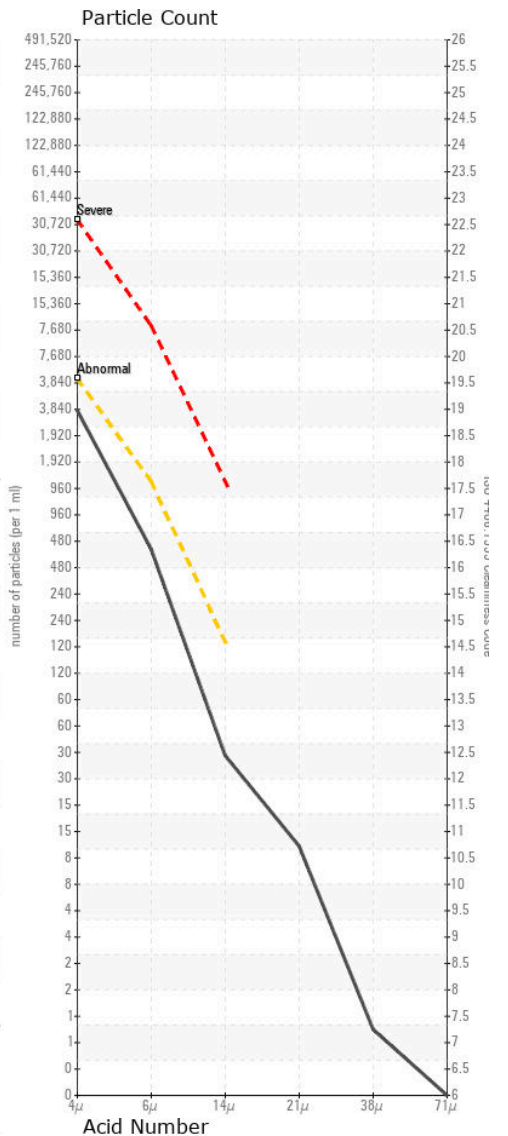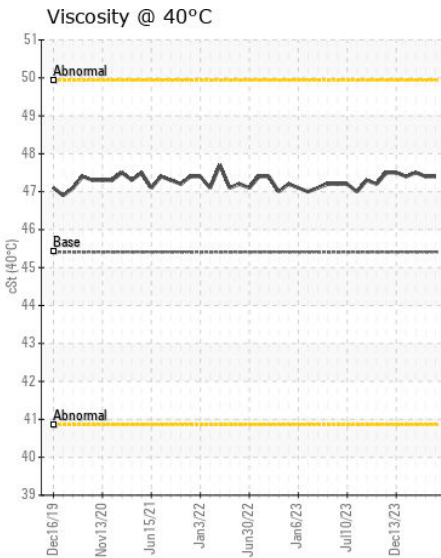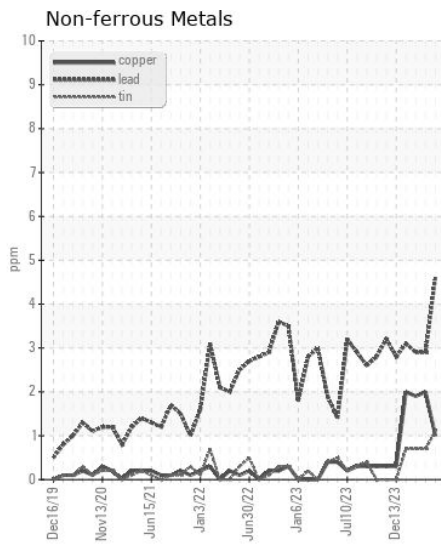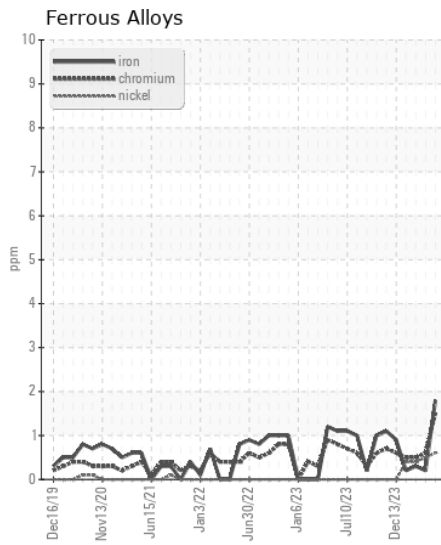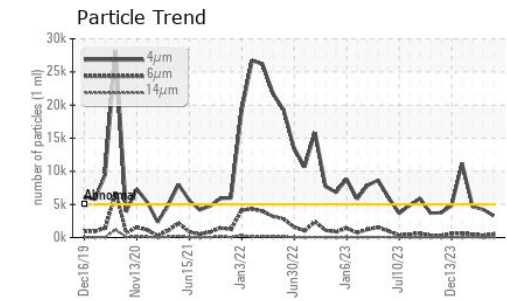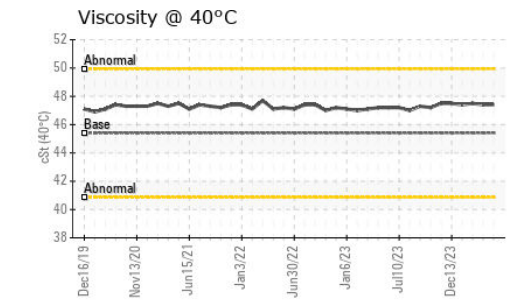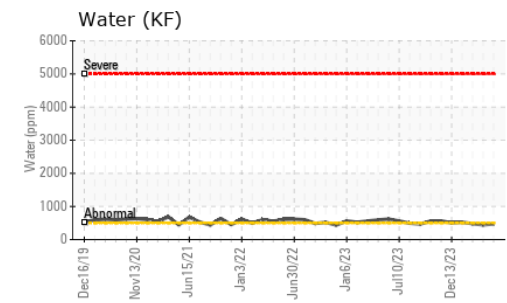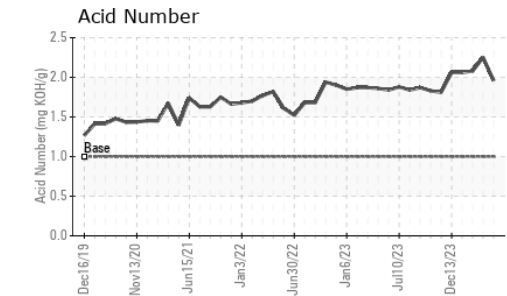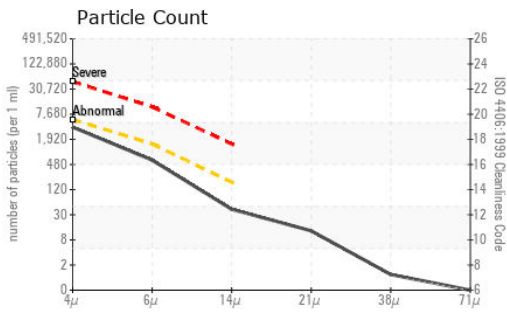

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : AN06194639 **Received** : 29 May 2024
Lab Number : 06194639 **Tested** : 31 May 2024
Unique Number : 11056762 **Diagnosed** : 31 May 2024 - Wes Davis
Test Package : IND 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CONEXO INC
 2320 STARR LAKE DRIVE
 ACWORTH, GA
 US 30101
 Contact: RICARDO HEIN
 rhein@conexoinc.com
 T: (678)806-0131
 F: x: