



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L90H 626088

Component
Diesel Engine

Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP444697	VCP449098	VCP392751
Sample Date		Client Info		24 Apr 2024	25 Jan 2024	07 Jun 2023
Machine Age	hrs	Client Info		0	4413	3173
Oil Age	hrs	Client Info		0	0	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	9	10	14
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	3	2	<1
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>20	<1	<1	<1
Tin	ppm	ASTM D5185m	>20	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	8	5	5
Potassium	ppm	ASTM D5185m	>20	2	1	0
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	6.8	7.0	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.4	21.9	21.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	0	2
Boron	ppm	ASTM D5185m	2.5	67	34	30
Barium	ppm	ASTM D5185m	0.0	1	5	0
Molybdenum	ppm	ASTM D5185m	0.7	55	42	45
Manganese	ppm	ASTM D5185m	0.0	<1	0	<1
Magnesium	ppm	ASTM D5185m	256	657	528	520
Calcium	ppm	ASTM D5185m	2057	2117	1604	1641
Phosphorus	ppm	ASTM D5185m	935	1326	822	880
Zinc	ppm	ASTM D5185m	1223	1438	1117	1065
Sulfur	ppm	ASTM D5185m	4079	4198	2738	3294
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.6	20.1	20.6
Base Number (BN)	mg KOH/g	ASTM D2896	10	10.0	10.3	9.6
Visc @ 100°C	cSt	ASTM D445	15.0	12.9	12.9	12.7


FT-IR (Direct Trend)

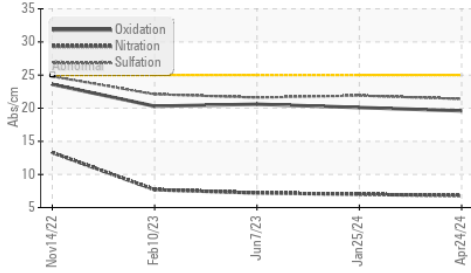


Base Number

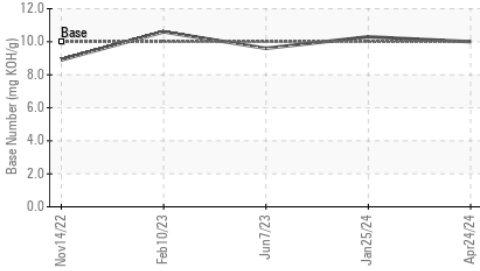


Viscosity @ 100°C

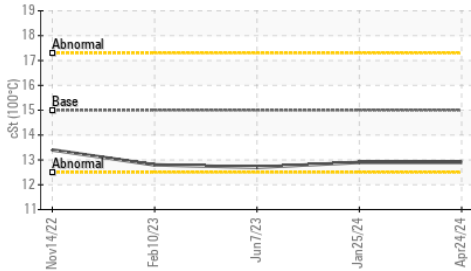


Iron (ppm)

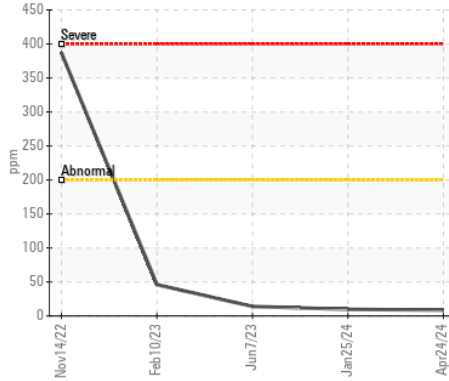


Aluminum (ppm)

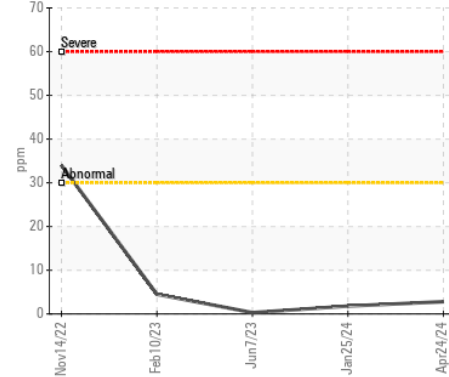


Copper (ppm)

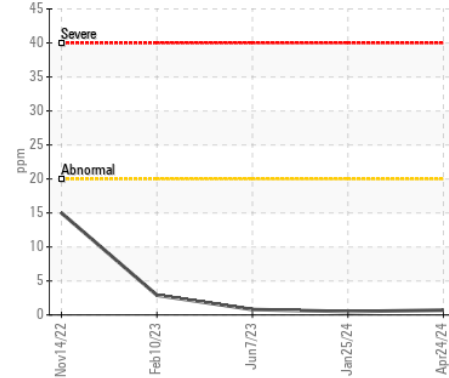


Viscosity @ 100°C

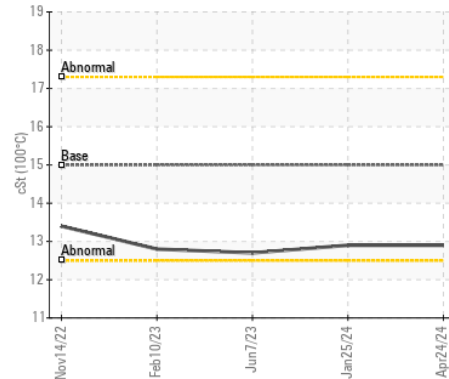


Lead (ppm)

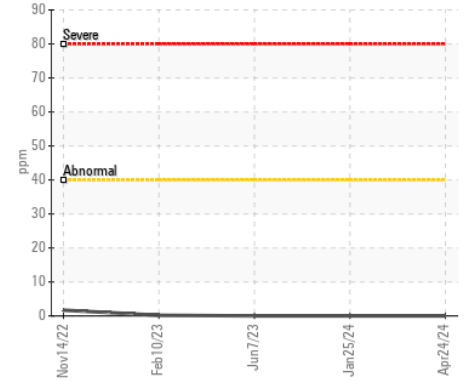


Chromium (ppm)

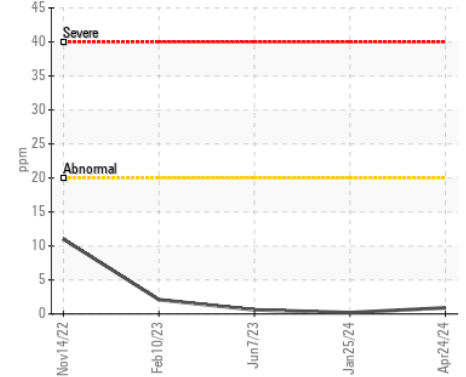

Silicon (ppm)

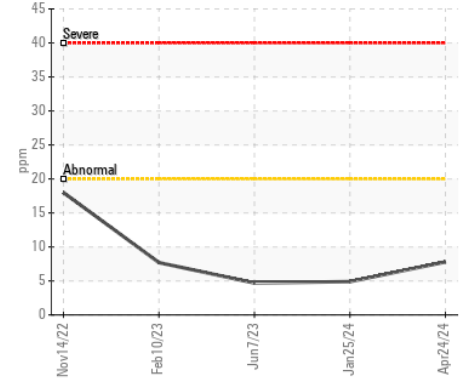

Base Number

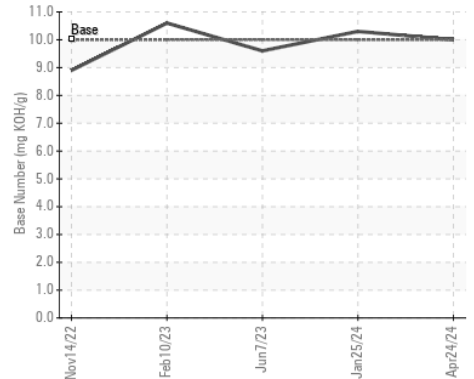

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : VCP444697
 Lab Number : 06194954
 Unique Number : 11057077
 Test Package : MOB 1 (Additional Tests: TBN)

Received : 30 May 2024
 Tested : 31 May 2024
 Diagnosed : 31 May 2024 - Don Baldrige

OLDCASTLE LAWN AND GARDEN
 2427 RWS RANCH RD
 DAVENPORT, FL
 US 33837
 Contact: DAVID ORTIZ
 david.ortiz@oldcastle.com
 T: (800)833-2984
 F: (863)421-1776

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)