



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
THOMAS 1470
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0906124	WC0821259	---
Sample Date		Client Info		15 Mar 2024	26 May 2023	---
Machine Age	mls	Client Info		204302	174324	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	27	22	---
Chromium	ppm	ASTM D5185m	>20	1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	6	7	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	0	1	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	5	---
Potassium	ppm	ASTM D5185m	>20	10	1	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.5	0.9	---
Nitration	Abs/cm	*ASTM D7624	>20	11.7	12.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.7	24.0	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	3	3	---
Boron	ppm	ASTM D5185m	250	24	18	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	79	83	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m	450	97	63	---
Calcium	ppm	ASTM D5185m	3000	1946	2337	---
Phosphorus	ppm	ASTM D5185m	1150	880	1055	---
Zinc	ppm	ASTM D5185m	1350	1058	1263	---
Sulfur	ppm	ASTM D5185m	4250	3649	4308	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.0	19.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.5	6.2	---
Visc @ 100°C	cSt	ASTM D445	14.4	12.6	13.9	---

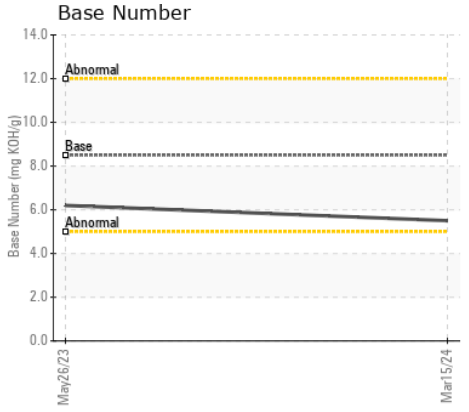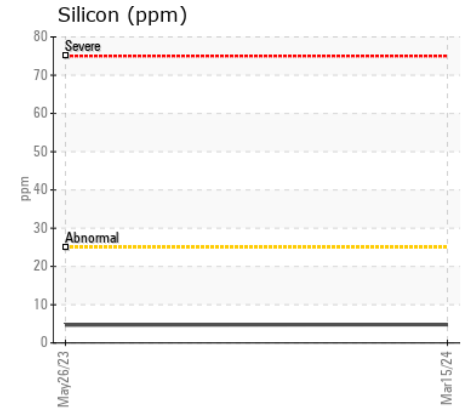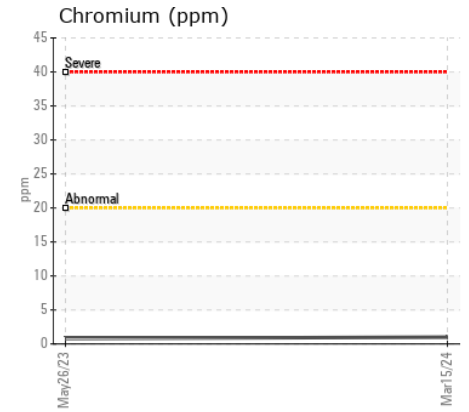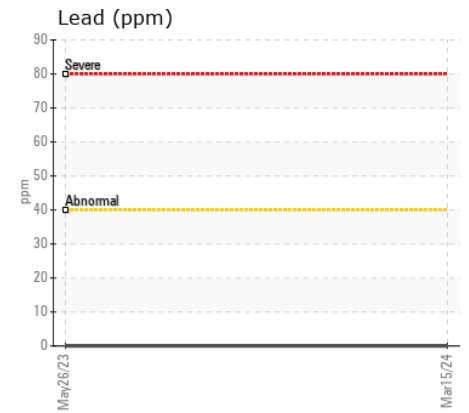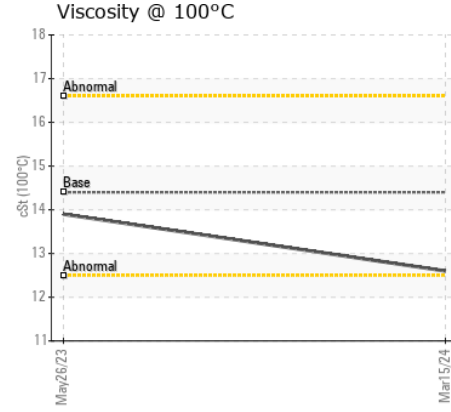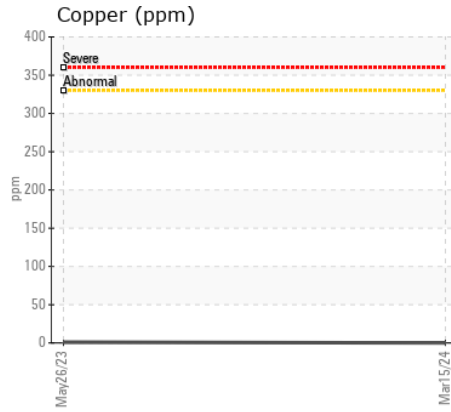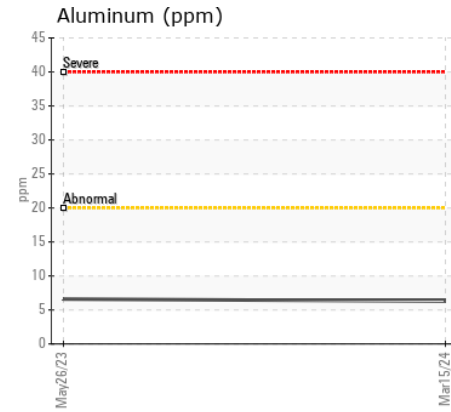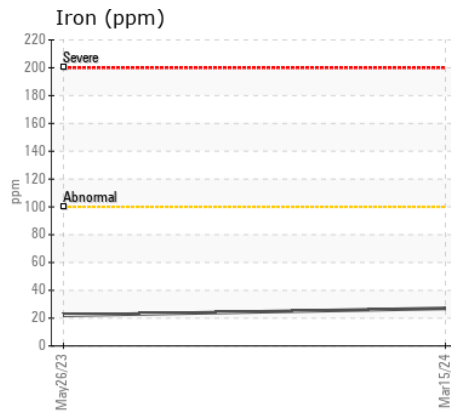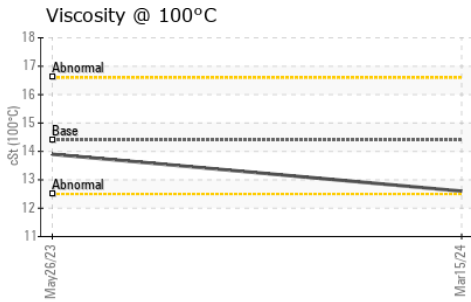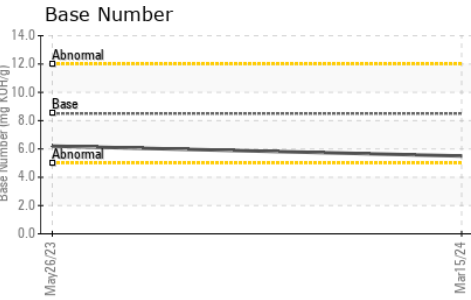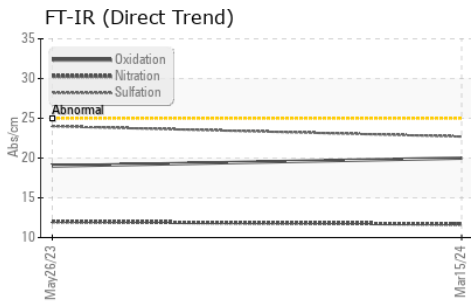

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0906124 **Received** : 30 May 2024
Lab Number : 06195157 **Tested** : 31 May 2024
Unique Number : 11057280 **Diagnosed** : 31 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

WAKE COUNTY PUBLIC SCHOOL SYSTEM
 1551 ROCK QUARRY ROAD
 RALEIGH, NC
 US 27610
 Contact: DEVIN WEBER
 dweber@wcpss.net
 T: (919)856-8076
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)